


Riggs Park

Indoor Air, Sub-Slab Vapor, Soil and Groundwater Sampling and Analysis Report

Prepared for the DC Department of Environment
and DC Department of Health

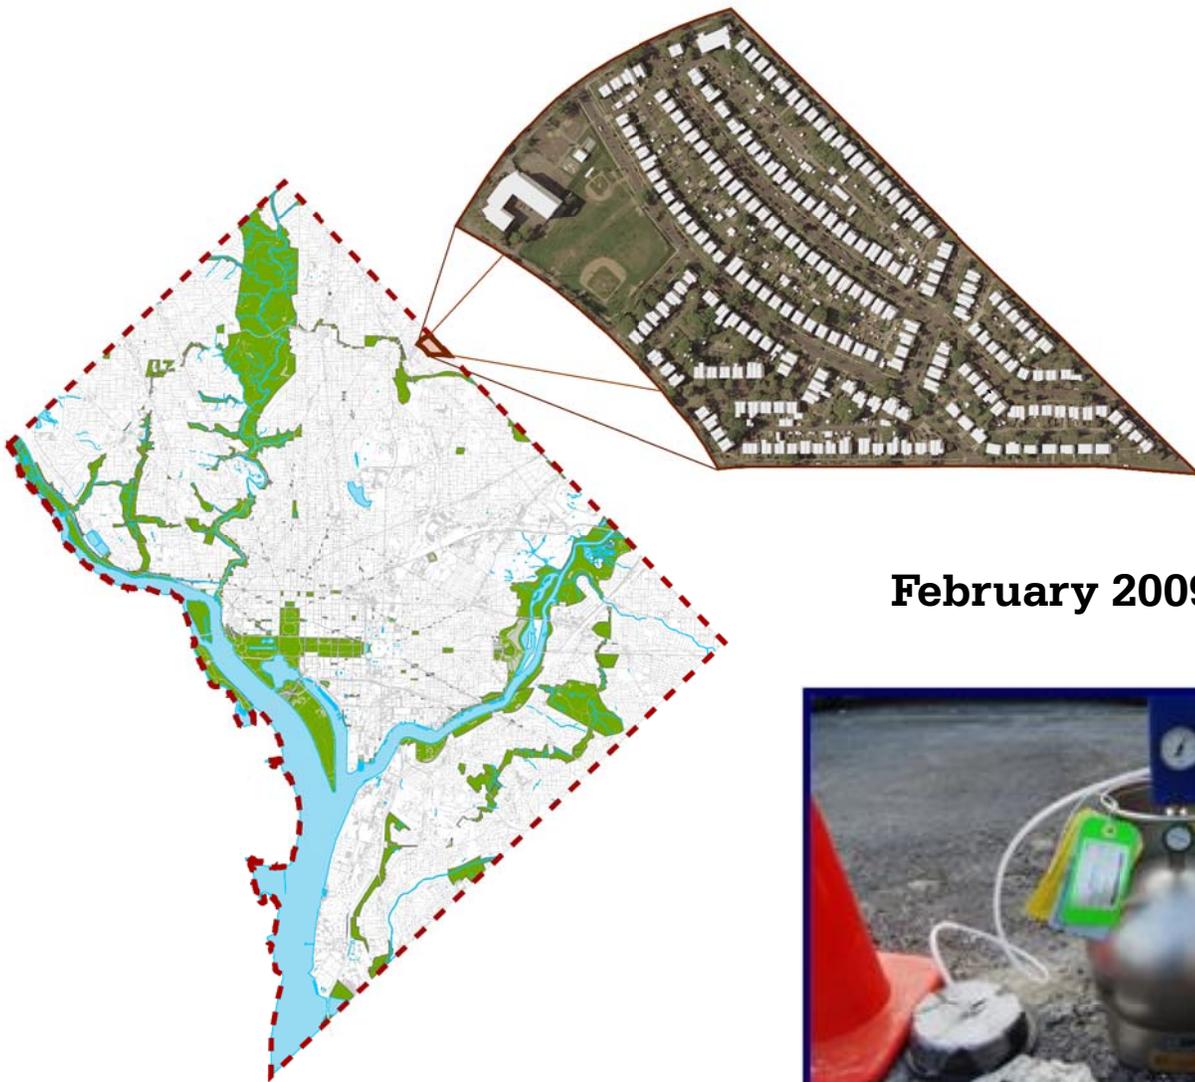

February 2009



$\Sigma^2\Pi$

S.S. Papadopoulos
& Associates, Inc.

CGS Chesapeake
GeoSciences, Inc.

**RIGGS PARK
INDOOR AIR, SUB-SLAB VAPOR, SOIL
AND GROUNDWATER SAMPLING AND
ANALYSIS REPORT**

Prepared for: The District of Columbia Department of
Health and the District of Columbia
Department of the Environment

Prepared by:



S.S. PAPADOPULOS & ASSOCIATES, INC.
Environmental & Water-Resource Consultants

February 2009

Executive Summary

This report presents results of a sampling program for indoor air, ambient outdoor air, sub-slab vapor, soil vapor, soil, and groundwater in the Riggs Park neighborhood of northeast Washington DC. This study was undertaken in 2007 and 2008 on behalf of the District of Columbia Department of Health and the District of Columbia Department of the Environment. The work was completed by S.S. Papadopoulos & Associates and its subcontractor Chesapeake GeoSciences. The investigation was prompted by a 1989 release of gasoline from a Chevron station on the corner of Eastern Ave. and Riggs Road in Chillum, Maryland. The plume of dissolved contamination from that release extends under the Riggs Park neighborhood for a distance of approximately 1400 feet. In addition to constituents associated with gasoline, other contaminants including tetrachloroethylene (PCE) have been detected persistently in groundwater under the neighborhood.

During the period from January through September 2008, the following samples were obtained: 128 indoor air samples from 115 homes; 39 samples of ambient outdoor air concurrent with the indoor air samples; 378 samples from sub-slab vapor monitoring ports in 106 homes, collected over three consecutive quarters; and 151 samples of subsurface vapors from outdoor vapor monitoring ports at 66 homes, collected during two consecutive quarters. In addition, 69 soil samples and 14 groundwater samples were collected from direct-push borings installed using Geoprobe equipment. All vapor samples were collected in 6-liter Summa canisters, and analyzed for volatile organic compounds via USEPA method TO-15 (modified). All soil and groundwater samples were analyzed for volatile organic compounds via USEPA method 8260.

Up to 68 individual parameters were analyzed in each vapor sample. Duplicate samples were sent to a secondary laboratory for confirmatory analysis. In the population of indoor air samples, forty-seven (47) different analytes were detected. Thirty-eight (38) analytes were detected in ambient air. For the subsurface samples, sixty-four (64) analytes were detected in the sub-slab samples, and forty-eight (48) were detected in the outdoor vapor monitoring port samples. Detection of any analytical parameter depends upon factors including the presence and concentrations of other compounds in each sample. In general, higher detection limits were associated with the outdoor soil vapor samples.

In the fourteen (14) groundwater samples, the compound most frequently detected was MTBE. Concentrations of MTBE observed in groundwater were consistent with those from the ongoing groundwater monitoring program. The majority of soil samples were collected above the water table and yielded non-detects in the analysis. One soil sample collected at the water table (28 ft depth) from the alley between Oglethorpe St. and Eastern Ave yielded detections of xylenes (6,100 ug/kg), naphthalene (3,000 ug/kg), and MTBE (3 ug/kg). These results are consistent with the presence of residual contamination from liquid-phase hydrocarbons (gasoline). This indicates that in addition to dissolved contamination, liquid phase gasoline had migrated from Maryland to the DC side of Eastern Ave. This location is within "Area B" targeted for remediation under USEPA's Final Remedy.

For each volatile organic compound in the TO-15 analyte list, and for each group of samples (ambient air, indoor air, sub-slab, and outdoor vapor monitoring port) the data population was examined. Statistical measures of the population were calculated for a select group of petroleum-related compounds (1,2,4-trimethylbenzene, 1,3,5-trimethylbenzene, benzene, toluene ethylbenzene, o-xylene, m,p-xylenes, MTBE, naphthalene, hexane, cyclohexane, and n-heptane), and chlorinated compounds (tetrachloroethylene (PCE), trichloroethylene, 1,1,1-trichloroethane, chloroform, chloromethane, and 1,4-dichlorobenzene). Maps of the indoor and subsurface distribution of these contaminants were also prepared. Many compounds detected in the TO-15 analyses are likely unrelated to any potential subsurface contamination (e.g. freons, various solvents and alcohol), and thus are not emphasized in the analysis.

Ambient air concentrations of benzene, toluene, and PCE are within ranges observed both at Washington DC's McMillan Reservoir, and within ranges reported in the literature for other urban environments. For the petroleum-related and chlorinated compounds cited above, it is noted that concentrations of most contaminants are higher in indoor air than in outdoor (ambient air), consistent with other studies showing that in-home sources of contaminants may dominate indoor air concentrations.

For each of the petroleum-related and chlorinated analytes cited above, the detected concentrations range over several orders of magnitude in each medium. The maximum benzene concentration detected in indoor air was $8.36 \text{ ug}/m^3$ (2.6 ppbV). The maximum benzene concentration detected in subsurface vapors was $24.9 \text{ ug}/m^3$ (7.8 ppbV). The maximum concentration of PCE detected in indoor air was $42.3 \text{ ug}/m^3$ (6.2 ppbV). The maximum concentration of PCE detected in subsurface vapors was $929 \text{ ug}/m^3$ (137.0 ppbV).

The contaminants observed in subsurface vapor samples are consistent with those detected in groundwater at the site. Where the petroleum-related and chlorinated compounds cited above are detected both indoors and in the sub-slab, the ratios of sub-slab vapor to indoor air concentrations range from 182 to 0.004. For each of the petroleum-related compounds, the maximum sub-slab to indoor air concentration ratio exceeds 1 (is higher in the sub-slab location than in indoor air) in at least 20% of the homes. The ratios exceed 10 for benzene, toluene, n-heptane, m,p-xylenes, and cyclohexane. Similar results are observed for the chlorinated compounds. For homes with tetrachloroethylene (PCE) detections in both the sub-slab and indoor air samples, the maximum sub-slab to indoor air concentration ratio exceeds 1 in 72% of the homes.

Table of Contents

	Page
List of Figures	iii
List of Tables	iv
List of Appendices	v
List of Acronyms and Abbreviations	vi
Executive Summary	ES-1
Section 1 Introduction.....	1
Purposes of this Study.....	1
Scope of Work	2
Section 2 Site History	4
Section 3 Summary of Previous Investigations	7
Soil and Groundwater Investigations.....	7
Soil Vapor Investigations.....	7
Indoor Air Investigations	8
Chevron Studies	9
USEPA Studies	9
DOH/BSEA Studies	9
Section 4 Current Site Conditions.....	11
Geology.....	11
Topography and Hydrology.....	11
Extent of Free Product and Source Area.....	12
Extent of Groundwater Contamination.....	13
Section 5 Project Methods and Materials	15
Timeline	15
Activities	15
Contacting Homeowners and Obtaining Access Agreements	15
Pre-VMP Installation Survey	16
Pre-Indoor Air Sampling Survey	16
Sub-Slab Vapor Monitoring Port Installation	17
Outdoor Vapor Monitoring Ports.....	17
Sampling and Analysis Methods.....	18

	Indoor Air Sampling	19
	Ambient Air Sampling	19
	Vapor Monitoring Port Samples	20
Section 6	Results.....	21
	Ambient Air Samples (AOA)	21
	Indoor Air Samples (INA)	22
	Sub-Slab Vapor Monitoring Ports (VMPs).....	23
	Outdoor Vapor Monitoring Ports (GMPs).....	23
	Soil Samples.....	24
	Groundwater Samples	25
	Data Validation	26
	Field QA/QC	26
	Laboratory QA/QC.....	26
	Independent Laboratory Duplicates	26
	Spatial Duplicates (VMPs).....	27
Section 7	Evaluation of Air and Vapor Sample Results	28
	Compounds Likely Unrelated to Subsurface Contamination	31
	Data Population Analysis.....	31
	Comparison of Ambient Air Data from Other Studies	33
	Comparison of Vapor Data to Previous Studies	34
	Comparison of Indoor Air Data to Ambient Air Data	35
	Geographic Distribution of Data.....	35
Section 8	Information from Home Surveys.....	37
Section 9	Ratios of Subsurface to Indoor Air Concentrations.....	38
Section 10	Conclusions.....	40
	Discussion and Recommendations.....	41
Section 11	References.....	43

Figures

Tables

Appendices

List of Figures

- Figure 1 Location of the Riggs Park Community
- Figure 2 Map showing Locations of Monitoring Wells, Soil Borings, and Soil Vapor Sampling Points from Previous Investigations
- Figure 3 Detections of Liquid-Phase Hydrocarbons
- Figure 4 Concentrations of Benzene and MTBE in shallow soil vapor samples in 2002 to 2004
- Figure 5 Shaded Relief Topographic Map of the Riggs Park Neighborhood
- Figure 6 Groundwater Elevations in August 2004
- Figure 7 Depth to Groundwater in August 2004
- Figure 8 Benzene Concentrations in Shallow Monitoring Wells September 2005
- Figure 9 Benzene Concentrations in Deep Monitoring Wells September 2005
- Figure 10 Benzene Concentrations in Shallow Monitoring Wells March 2008
- Figure 11 Benzene Concentrations in Deep Monitoring Wells March 2008
- Figure 12 MTBE Concentrations in Shallow Monitoring Wells September 2005
- Figure 13 MTBE Concentrations in Deep Monitoring Wells September 2005
- Figure 14 MTBE Concentrations in Shallow Monitoring Wells March 2008
- Figure 15 MTBE Concentrations in Deep Monitoring Wells March 2008
- Figure 16 PCE Concentrations in Shallow Groundwater from Spring 2002 Investigation
- Figure 17 PCE Concentrations in Deep Groundwater (at least 10 feet below water table) from Spring 2002 Investigation
- Figure 18 Project Timeline
- Figure 19 Frequency of Detections in Ambient Air Samples
- Figure 20 Frequency of Detections Indoor Air Samples
- Figure 21 Frequency of Detections in Sub-Slab VMP Samples
- Figure 22 Frequency of Detections in Outdoor GMP Samples
- Figure 23 Locations of Outdoor Vapor Monitoring Ports (GMPs) and Detections of Selected Compounds in Groundwater Samples
- Figure 24 Scatter Plots of Concentrations in Duplicate Samples from Spectrum Analytical and Pace Laboratories (for Selected Analytes)

Figure 25	Scatter Plots of Concentrations in Samples from Homes with Pairs of Sub-Slab VMPs (for Selected Analytes)
Figure 26	Comparison of Detections between Indoor Air and Ambient Air Samples
Figure 27	Comparison of Detections between Indoor Air and Sub-Slab VMP Samples
Figure 28	Comparison of Detections between Indoor VMP Outdoor GMP Samples
Figure 29	Box-Whisker Plot Summarizing Detections of Selected Petroleum-Related Compounds in Vapor Samples
Figure 30	Box-Whisker Plot Summarizing Detections of Selected Chlorinated Compounds in Vapor Samples
Figure 31	Geographic Distribution of Selected Petroleum-Related Compounds in Indoor Air Samples (CONFIDENTIAL)
Figure 32	Geographic Distribution of Selected Petroleum-Related Compounds (maximum concentration) in Subsurface Vapor Samples (CONFIDENTIAL)
Figure 33	Geographic Distribution of Selected Chlorinated Compounds in Indoor Air Samples (CONFIDENTIAL)
Figure 34	Geographic Distribution of Selected Chlorinated Compounds (maximum concentration) in Subsurface Vapor Samples (CONFIDENTIAL)
Figure 35	Ratio of Sub-Slab to Indoor Air Concentrations for Selected Petroleum-Related Compounds
Figure 36	Ratio of Sub-Slab to Indoor Air Concentrations for Selected Chlorinated Compounds

List of Tables

Table 1	Summary of Vapor Sampling Conducted by Chevron, USEPA , and the District of Columbia Department of Health (DOH)
Table 2	Detections of Organic Compounds in Groundwater Reported to the District of Columbia Department of Environment (DDOE) by Chevron
Table 3	List of Vapor Samples Collected During This Study (in Chronological Order)
Table 4	List of Vapor Samples By Home, Sample Type, and Quarter
Table 5	Analytes Detected in Vapor Samples
Table 6	Summary Statistics for Selected Petroleum-Related Compounds Analytes

Table 7	Summary Statistics for Selected Chlorinated Analytes
Table 8	Soil and Groundwater Samples Collected During Second Quarter (Q2) Installation of Geoprobe Borings
Table 9	Analytes Detected in Soil and Groundwater Samples
Table 10	Duplicate Vapor Samples Collected
Table 11	Selected information from Home Surveys

List of Appendices

Appendix A	Example Homeowner Information Package and Access Agreement
Appendix B	Pre-VMP Installation Survey Forms (CONFIDENTIAL)
Appendix C	Pre-Sampling Home Survey Forms (CONFIDENTIAL)
Appendix D	Q1 Data Collection Forms
Appendix E	Q2 Data Collection Forms
Appendix F	Q3 Data Collection Forms
Appendix G	Geoprobe Boring Logs
Appendix H	Analytical Data - Level III Lab Reports, Spectrum Analytical Inc.
Appendix I	Analytical Data - Level III Lab Reports, Pace Analytical Services, Inc.
Appendix J	Analytical Data - Level III Lab Reports, Phase Separation Science, Inc.
Appendix K	Analytical Data - Level IV Lab Reports, Spectrum Analytical Inc.
Appendix L	Analytical Data - Level IV Lab Reports, Pace Analytical Services, Inc.
Appendix M	Analytical Data - Level IV Lab Reports, Phase Separation Science, Inc.
Appendix N	CD-ROM with Electronic Data Files from Laboratories
Appendix O	Q1, Q2, and Q3 Monitoring Reports
Appendix P	Cumulative Frequency Diagrams for All Analytical Parameters
Appendix Q	Community Relations Reports
Appendix R	Record of Contacts with Residents (CONFIDENTIAL)
Appendix S	Signed Access Agreements (CONFIDENTIAL)
Appendix T	Key to Home IDs and Addresses (CONFIDENTIAL)

List of Acronyms and Abbreviations

<i>ug/kg</i>	Microgram per kilogram
<i>ug / m³</i>	Micrograms per cubic meter
<i>ug/l</i>	Micrograms per liter
1,4-DCB	1,4-Dichlorobenzene
111-TCA	1,1,1-Trichloroethane
124-TMB	1,2,4-Trimethylbenzene
135-TMB	1,3,5-Trimethylbenzene
AOA	Identifier for an ambient outdoor air sample collected during this study
ATSDR	Agency for Toxic Substances and Disease Registry
BSEA	Building Sciences and Engineering Associates, Ltd.
BTEX	Benzene, toluene, ethylbenzene and toluene
CGS	Chesapeake GeoSciences, Inc.
COC	Contaminant(s) of Concern
COTR	Contracting Officer's Technical Representative
DC	District of Columbia
DDOE	District Department of Environment
DOH	Department of Health of the District of Columbia
DPE	Dual-phase extraction
GMP	Outdoor Vapor Monitoring Port (Geoprobe-Installed Monitoring Port), or the identifier for an outdoor vapor monitoring port sample collected during this study
INA	Identifier for an Indoor Air Sample collected during this study
MCL	Maximum Contaminant Level (a drinking water standard)
MDE	Maryland Department of the Environment
MEK	Methyl ethyl ketone (2-butanone)
MIBK	Methyl isobutyl ketone (4-Methyl-2-pentanone)
MTBE	Methyl-Tert-Butyl Ether
ND	Non-detect or not detected
PCE	Perchloroethylene, synonymous with Tetrachloroethylene and Tetrachloroethene
Perc	Perchloroethylene, synonymous with Tetrachloroethylene and Tetrachloroethene
PID	Photo-ionization detector
ppb	Parts per billion
ppbV	Parts per billion by volume
ppm	Parts per million
ppmV	Parts per million, by volume
PVMP	Identifier for a previously-installed sub-slab vapor monitoring port sampled during this study
QA/QC	Quality Control / Quality Assurance
QAPP	Quality Assurance Project Plan
RFP	Request for Proposal
SOW	Scope of Work or Statement of Work
SSP&A	S.S. Papadopoulos & Associates, Inc.

TAGA	Trace Atmospheric Gas Analyzer
TCE	Trichloroethylene, synonymous with Trichloroethene
TPH	Total Petroleum Hydrocarbons
TVH	Total Volatile Hydrocarbons in the C5 to C12 range
USACE	United States Army Corp of Engineers
USEPA	United States Environmental Protection Agency
UST	Underground Storage Tank
VMP	Vapor Monitoring Port, or the identifier for a sub-slab vapor monitoring port sample collected during this study

REPORT

Section 1

Introduction

This report was completed by S.S. Papadopoulos & Associates, Inc. (SSP&A) on behalf of the District of Columbia Department of Health (DOH) and the District Department of Environment (DDOE). Chesapeake GeoSciences, Inc. (CGS), as subcontractor to SSP&A, contributed to the data collection and analysis. Additional reports to be completed under the planned scope of work include individualized reports distributed to each participating homeowner. Other reports previously completed and submitted under this contract are included in the Appendices.

The data presented herein were collected from January through September 2008 by staff of SSP&A and CGS. All samples collected for this study were obtained in and around homes in the Riggs Park neighborhood of northeast Washington DC. Additional data from previous investigations and other monitoring sites are cited where appropriate.

This work was completed under District of Columbia contract GS-10F-0426M, DC Task Order Number DCHC-2007-T-0022 and Purchase Order PO283733-KGO/DDOE/R0607/675-Riggs Park.

Purposes of this Study

A gasoline release from a Chevron station located at 5801 Riggs Road in Chillum, Maryland (Figure 1) was reported to the Maryland Department of the Environment (MDE) in October 1989. Under oversight of MDE, remedial activities including pump-and-treat and groundwater monitoring continued through 2001. At that time, it was reported that the plume of groundwater contamination had migrated across Eastern Avenue into the District of Columbia. In October 2001, U.S. Environmental Protection Agency (USEPA) Region III assumed responsibility for the site, providing oversight for Chevron's ongoing remedial activities. USEPA entered into a cooperative agreement with the U.S. Army Corp of Engineers (USACE) for additional data collection, including soil vapor monitoring. During site investigations, the presence of tetrachloroethylene (PCE) in soil and groundwater was also detected. EPA began to investigate the PCE contamination in 2002.

Under Chevron's and USEPA's oversight, soil vapor and indoor air samples were collected from homes in the Riggs Park community from 2002 through 2005. A number of investigations by, and on behalf of the U.S. Environmental Protection Agency (USEPA), the U.S. Army Corps of Engineers (USACE), and the Chevron Corporation were completed during this period. In February, 2006, the Council of the District of Columbia ordered additional in-home testing under Resolution 16-522.

The initial phase of the District's testing was completed by Building Sciences & Engineering Associates (BSEA) in 2006. A total of 97 homes were tested in the spring and

summer of 2006 for concentrations of volatile organic chemicals in indoor air. BSEA found that the indoor air PCE concentrations exceeded the outdoor air concentrations in 55% of homes tested. For benzene, the percentage of homes with greater indoor than outdoor concentrations was 72%. BSEA identified a number of uncertainties regarding the significance of these results, including the source of these vapors.

As a consequence of these results and BSEA's recommendations, the District of Columbia government decided to commission this Phase II Study. The goals of this Phase II study are to evaluate and further monitor for subsurface soil vapor intrusion to indoor air. In addition to further in-home testing, Phase II included installation of vapor monitoring ports and testing of vapors from in, around, and under homes.

Scope of Work

The initial Scope of Work (SOW) outlined for this Phase II study by DOH included 13 tasks. The details of these tasks and approaches to their completion are outlined in the Request for Proposal (RFP), the Work Plan and the Quality Assurance Project Plan (SSP&A, 2007). Upon completion of the sampling in September 2008, the SOW pertaining to the remaining reporting tasks was slightly modified. Responsibility for issuance of the Final Corrective Action Report now lies with DDOE, with support from SSP&A. In addition, the revised SOW encompasses a broader range of potential contaminants than originally planned.

SSP&A and its subcontractor were tasked with obtaining indoor air samples from up to 150 homes in the Riggs Park neighborhood, with concurrent ambient (outdoor) air samples. The study area is bounded by Riggs Road, NE, Eastern Avenue, NE, Kennedy Street, NE and Madison Street, NE (Figure 1). In addition, installation of sub-slab vapor monitoring ports was planned for each of these homes. (Sub-slab sampling provides a measurement of vapor concentrations present immediately under the home.) Sampling of sub-slab vapors was to be repeated for three calendar quarters. The Statement of Work also required installation of outdoor vapor monitoring ports at multiple depths. A total of 225 sub-slab and outdoor vapor monitoring ports were to be installed and sampled. During development of the Work Plan in December, 2007, the DOH's technical representative requested that outdoor vapor monitoring ports be installed in the second quarter, and that they be sampled for two consecutive quarters.

The project SOW specified that vapor analysis be completed by EPA method TO-15. The analyte list for method TO-15 includes over 60 analytes, and may vary between laboratories. The TO-15 analyte lists for the laboratories used in this project are included in the Work Plan and QAPP.

The Scope of Work also included the following requirements:

- Collection of soil and/or groundwater samples from outdoor vapor monitoring ports (GMPs) installed using Geoprobe equipment, and analysis via USEPA Method 8260

- Collection of duplicate vapor samples for analysis at a secondary laboratory for quality control purposes

This report addresses conditions in the Riggs Park neighborhood in the 2008 time frame. No attempt is made to extrapolate indoor air, sub-slab, or ambient air data collected during this study to indoor air concentrations in previous years. Nonetheless, some data necessarily point to contaminant migration that may have occurred at an earlier time. These issues are discussed where appropriate.

Section 2

Site History

In 1954, a Gulf service station was built and began operating at 5801 Riggs Road, Chillum, MD. Subsequently, after Gulf Oil Corporation merged with Chevron U.S.A., Inc., the Service Station became a Chevron-branded location. In June 1993, the service station was sold to an independent owner, with the land, buildings, underground storage tanks (USTs), and appurtenances included in the sale (Gannett Fleming, 2003a). This service station continues to operate at the present time. Currently it is branded as a Sunoco gasoline station.

Initial reports of a petroleum release from this station were filed with the Maryland Department of the Environment (MDE) in October, 1989 (Gannett Fleming, 2003a). An initial assessment and installation of the first monitoring wells were completed the following month. Following detection of liquid-phase gasoline product in monitoring wells, a product recovery system was installed on-site in 1990 with MDE oversight (Gannett Fleming, 2003a). Through 2001, a number of modifications to the groundwater and gasoline recovery systems were implemented, including installation of dual phase extraction (DPE) wells and soil vapor extraction wells (Gannett Fleming, 2003a, 2006). The DPE system was further expanded in January 2005.

In 2001, Chevron discovered that the gasoline-contaminated groundwater had migrated into the District under the Riggs Park neighborhood. Because the contaminated groundwater impacted two separate political jurisdictions (the State of Maryland and the District of Columbia), at the request of the District of Columbia City Council, USEPA assumed the lead investigatory role for the Facility (USEPA, 2007). A unilateral Administrative Order was issued by USEPA in December 2002 requiring Chevron to conduct further investigations, to perform interim measures to mitigate threats to human health and the environment, and to evaluate alternatives for corrective actions needed to protect human health and the environment (USEPA, 2007).

In 2002, Chevron implemented further investigation activities including direct push (Geoprobe) investigation and sampling for soils and groundwater, soil vapor sampling, and collection of ambient air and basement sump samples. Additional monitoring wells were installed in the District of Columbia to monitor the groundwater (Figure 2). In addition, in 2005, Chevron completed sampling of indoor air in selected homes. Sampling of groundwater and vapors under Chevron's oversight has continued through the present day.

During the summer of 2002, ongoing site investigations found PCE in groundwater commingled with gasoline-related contaminants. EPA concluded that the PCE was not related to the gasoline release, and therefore that the PCE contamination was not within the scope of EPA's RCRA corrective action investigation (USEPA, 2007). An investigation of the PCE contamination was therefore begun independently, under USEPA's Superfund Division. In the summer of 2002, EPA began sampling soil, groundwater and indoor air to investigate the source

of the PCE. In addition, USEPA requested that the Agency for Toxic Substances and Disease Registry (ATSDR) provide public health recommendations about the presence of PCE in the community.

Coincident with USEPA and Chevron investigations the District of Columbia DOH began investigations of indoor air. In the summer of 2006, DOH oversaw indoor air and ambient (outdoor) air testing for 97 homes in the Riggs Park neighborhood (BSEA, 2006). All indoor air samples were collected in Summa canisters for 24 hours. Summa canisters were placed in the basement of each residence. Due to conditions in the access agreements signed by the residents, some of these results remain confidential, i.e. the addresses of the homes in which each sample was collected have not been released. Subsequently, DOH collected 12 additional indoor air samples and two additional outdoor air samples in March of 2007.

In 2007, the USEPA issued its proposed remedy for the Chevron gasoline release (USEPA, 2007) and requested public comments. The proposed remedy consists of the following elements:

- continued operation of the existing groundwater remediation system in Maryland (Area A on Figure 2)
- expansion of the existing system by installing additional recovery wells at an angle across Eastern Ave. (Area B on Figure 2), and
- installation of individual vapor mitigation systems in homes above the plume where measured vapor concentrations exceed EPA's remedial standards for indoor air for
 - Benzene ($8 \text{ ug} / \text{m}^3$),
 - MTBE ($17 \text{ ug} / \text{m}^3$),
 - Xylenes ($100 \text{ ug} / \text{m}^3$),
 - Ethylbenzene ($1,000 \text{ ug} / \text{m}^3$), and
 - Toluene ($5,000 \text{ ug} / \text{m}^3$).

EPA's remedial standards represent the contaminant concentration that pose an excess lifetime cancer risk to 3.5 people in 100,000 for benzene or 1 in 100,000 people for MTBE. For the non-carcinogens toluene, ethylbenzene and the xylenes, levels were established by adopting the concentrations corresponding to a Hazard Quotient of one.

As noted by USEPA in their response to comments (USEPA, 2008a), the design objective of the existing and final remediation system is source removal, not hydraulic containment of the dissolved phase plume. Therefore, the capture zones of extraction wells do not encompass the entire 1,400-foot long dissolved phase plume. EPA anticipates that once the liquid gasoline source is eliminated, the dissolved phase plume will degrade rapidly to attain drinking water standards within a few years.

Based on comments received during the public comment period and evaluation of the remedy selection criteria, USEPA (2008a) modified the proposed remedy to include

- the installation of an independent remediation system on the District of Columbia side of Eastern Avenue (Area B on Figure 2), and
- the installation of an oxygen injection curtain to accelerate degradation of the dissolved phase plume (Area C on Figure 2).

In 2008, the ATSDR also released its Indoor and Outdoor Air Data Health Evaluation for PCE contamination in the Riggs Park neighborhood (U.S. Department of Health and Human Services, 2008). The public comment period for that report closed in May of 2008. Comments included those of the District of Columbia (Government of the District of Columbia, 2008a).

Section 3

Summary of Previous Investigations

In this section, the previous and ongoing investigations of soil, groundwater, and vapors at the Chillum gasoline and PCE release site are outlined. This section is intended as a brief reference to existing data sources and timeline of site activities. More detailed descriptions of each study can be found in the references cited.

Soil and Groundwater Investigations

The initial groundwater monitoring wells (MW-1 through MW-5) were installed on the station property by Chevron in 1989. Through the 1990s, additional wells were added and sampled. In addition to dissolved contamination in groundwater, liquid-phase petroleum was detected in a number of wells (Figure 3).

Following discovery of groundwater contamination in the District of Columbia in 2001, the groundwater monitoring program was expanded.

- Between 2001 and 2005, Chevron's consultants installed and collected groundwater samples from more than 200 direct-push (Geoprobe) sampling locations; (Figure 2)
- Between 2001 and 2005, Chevron's consultants installed and sampled approximately 75 additional groundwater monitoring wells (Figure 2)
- Periodic collection and analysis of groundwater samples from these wells has continued to the present time.

USEPA began to investigate the presence of PCE in groundwater in 2002.

- USEPA evaluated concentrations of PCE detected in groundwater during Chevron's 2002 Direct-Push Investigation (USEPA, 2002b), and from Summer 2004 monitoring well sampling (USEPA, 2004b)
- In September 2003, USEPA collected a small number of tap water samples and groundwater samples from direct-push borings for analysis (USEPA, 2003a).

Soil Vapor Investigations

Soil vapor recovery has been implemented as a remedial measure in the source area, and continued management of this system has included sampling and analysis of vapor samples. The following discussion, however, focuses primarily on soil vapors in and around the residential neighborhood, not on vapor extraction wells in the source area. These are vapors potentially associated with the plume of contaminated groundwater under the residential areas. Table 1 presents a summary of these previously collected data.

Chevron's consultants began investigating soil vapors in the Riggs Park neighborhood in 2002. These investigations included:

- From January through December 2002, Chevron conducted several phases of soil vapor and ambient air sampling (Gannett Fleming, 2003b); soil vapor samples were collected at multiple depths from 68 residential properties on Eastern Ave, Eighth Street, and Oglethorpe St.
- From March through August, 2004, Chevron collected soil vapor samples from direct-push location throughout the Riggs Park neighborhood; in addition 14 ambient air samples were collected in the neighborhood from February through April 2004
- In October 2004, Chevron collected a total of 24 soil vapor samples from 22 residential properties on Nicholson St., Eastern Ave, and Eighth St. All soil vapor sample locations were laterally within 3 feet of the building (Gannett Fleming, 2004, 2006).

USEPA began collecting soil vapor data as part of the Chillum PCE investigation. Sampling events included:

- In July 2003 sampling USEPA collected 11 soil vapor samples (U.S. Environmental Protection Agency, 2003a); an additional two samples were collected in September 2003
- Twenty-four (24) additional soil vapor samples (with associated ambient air samples) were collected from inside and outside Riggs Park homes in April 2004 (US Environmental Protection Agency, 2004b) for analysis via TO-15 in the EPA's Trace Atmospheric Gas Analyzer (TAGA) laboratory.

The USEPA and Chevron results were interpreted collectively by USEPA in 2004 (USEPA, 2004e). Benzene and MTBE concentrations in shallow soil (0 to 5 ft below the basement slab) were compared to Removal Action Levels of $220 \text{ ug} / \text{m}^3$ (benzene) and $1600 \text{ ug} / \text{m}^3$ (MTBE). None of the benzene or MTBE results in shallow soils were found to exceed these action levels (Figure 4).

As part of the concurrent PCE investigation, USEPA also evaluated PCE soil vapor concentrations with regard to EPA's Removal Action Level of $630 \text{ ug} / \text{m}^3$ in air (USEPA, 2003b). This level was subsequently reduced to $310 \text{ ug} / \text{m}^3$ (USEPA, 2004g). Subsurface PCE results from four of the initial twelve homes tested were above action levels, requiring additional indoor air testing. Additional testing and analysis in 2004 (USEPA, 2004d) confirmed soil vapor samples results in exceedance of EPA soil vapor action levels, warranting additional indoor sampling.

Indoor Air Investigations

Indoor air sampling and investigation have been completed using both Summa canisters USEPA's on-site TAGA laboratory.

Chevron Studies

Indoor and ambient air samples were collected by Chevron's consultants:

- From April through July 2005, Chevron collected indoor air samples from 21 locations and ambient air samples from 18 locations on Nicholson and Oglethorpe St.
- During 2007, Chevron's consultant collected indoor air, ambient air, and sub-slab vapor samples from a single home that had been identified by USEPA as a target for re-sampling (Gannett Fleming, 2007b).

USEPA required Chevron to use the gasoline plume boundaries as a selection criterion for identifying homes to be sampled for subsurface vapor intrusion (USEPA, 2007). The results are included with those reproduced on Table 1. Chevron's consultants concluded that the indoor air analytical results indicated non-detect or very low levels of hydrocarbons. The levels were below the EPA Target Indoor Air Action Levels and were similar to those observed in ambient air (Gannett Fleming, 2006).

USEPA Studies

USEPA investigations of indoor air date back to 2003.

- In April 2003 EPA sampled indoor air in four homes using Summa canisters (U.S. Environmental Protection Agency, 2003a)
- A larger program of indoor air sampling using Summa canisters was completed in July 2003. Forty-six indoor air samples were collected on the basement and first floor levels (Appendix F in Gannett Fleming, 2005)
- Nearly 60 additional indoor air samples were collected in April 2004 from the basement and first floors (US Environmental Protection Agency, 2004a).
- Subsequent indoor air sampling by EPA has also been directed at individual homes suspected of having elevated levels of VOCs.

Between 2003 and 2005, EPA's Superfund Removal program collected soil vapor and indoor air samples from 35 homes in Riggs Park for its PCE investigation. The U.S. Army Corps of Engineer (USACE), on behalf of EPA, also generated split /quality control data (USEPA, 2007). The minimum and maximum results for selected compounds are included with those on Table 1. The maximum benzene concentration detected was $13 \text{ ug} / \text{m}^3$. The maximum PCE concentration was $23 \text{ ug} / \text{m}^3$.

DOH/BSEA Studies

Independent sampling of indoor and outdoor air was completed by the District of Columbia Department of Health.

- In 2006, the DC Department of Health oversaw indoor and ambient air testing for 97 homes (BSEA, 2006)

- Subsequently, follow-up testing was completed in 12 homes in March 2007.

The first phase of DOH indoor air sampling was completed during the Summer of 2006 (BSEA, 2006). Indoor air samples were collected in 97 homes, together with contemporaneous ambient air samples. The results are summarized in Table 1. The maximum benzene detected was $26.8 \text{ ug}/m^3$. The maximum PCE detected was $38.9 \text{ ug}/m^3$. In this data set, 74% of the benzene detections and 62% of the PCE detections were qualified with a "J" value. Results flagged with a "J" are between the method detection limit and the reporting limit, and are considered estimated values.

The USEPA statistically evaluated the indoor air data collected from the initial 97 homes (USEPA, 2007). They concluded that there are elevated benzene and MTBE vapor concentration in homes above the gasoline plume as compared to homes situated outside the plume boundaries, consistent with the likelihood of subsurface vapor intrusion associated with the gasoline plume. Based on USEPA's review of 151 indoor air samples they identified up to 5 homes above the gasoline plume where measured vapor concentration have exceeded EPA's remediation standards.

Section 4

Current Site Conditions

A number of site investigations have been completed at the Riggs Park site since groundwater contamination was identified in 1989. The following discussion relies primarily upon site investigation documents produced by Chevron and its consultants, as well as the USEPA and the USACE.

Geology

The Riggs Park neighborhood and the Riggs Road Chevron are located within the Coastal Plain Physiographic Province. The Site overlies the Cretaceous Patuxent Formation, a fluvial non-marine deposit that directly overlies Precambrian and early Paleozoic bedrock and dips gently to the east to southeast (Gannett Fleming, 2006).

At the site, the Patuxent Formation is estimated to be 50 to 100 feet thick. Bedrock was apparently encountered in one direct-push location, GP-14BR, located in the alley between Oglethorpe Street and Eastern Avenue, at a depth of approximately 78 feet. Bedrock may also have been encountered at 24.5 ft during the attempted installation of well MW-34C, located along Kennedy Street. The bedrock type is not known (Gannett Fleming, 2006).

Investigations at the Site indicated that silty sands comprised approximately 75 percent of the materials encountered, while well-sorted sands comprised less than ten percent. The well-sorted sand layers could not be correlated among boreholes. They were therefore believed to be local in nature and not widespread (Gannett Fleming, 2006). Of 23 soil samples submitted for laboratory particle size testing, 14 were classified as silty sand (SM), while five other samples were given dual classifications including SM and one other class (i.e., either poorly graded sand [SP], clayey sand [SC], or well graded sand [SW]). Two samples were classified SP, and two samples were classified as cohesive soils sandy silt (ML) or silty clay (CL-ML) (Gannett Fleming, 2006).

Gannett Fleming (2006) identified a deposit of gray to black clay that could be correlated between boreholes south of the Service Station. The northern edge of this deposit is located south of Eastern Avenue. Based on boring logs, the thickness of this deposit is believed to be six to ten feet; although most borings did not extend beneath the clay. This clay area is asymmetrical in shape, approximately 200 feet in breadth and 700 feet in length, with its longest axis running approximately parallel to the primary direction of groundwater flow.

Topography and Hydrology

The elevation of the Riggs Pak neighborhood generally decreases from north to south toward Nicholson Street, and from the west toward Nicholson Street (Figure 5). The former Chevron station is situated at an elevation of approximately 170 ft elevation above sea level.

The lowest point in this area, the intersection of Eastern Ave. and Kennedy Street is at an elevation of approximately 100 ft. The decrease in elevation is accomplished through a series of terraces corresponding to Nicholson and Oglethorpe streets and their parallel alleys, with steeper grades between.

Groundwater in the Riggs Park area is under unconfined, or water table conditions. The primary source of recharge is precipitation, although man-made sources such as leaking water mains or storm sewers may also contribute. As in many unconfined systems, the general trend of groundwater flow is from areas of higher elevation (recharge areas) toward areas of lower elevation (discharge areas).

Review of historic aerial photographs determined that prior to construction of the residential neighborhood in the 1950s, a tributary to Northwest Branch was located in the vicinity of present-day Nicholson and Kennedy Streets and flowed to the southeast (Gannett Fleming, 2006). At the current time, a storm sewer is situated along Nicholson Street. Field observations by Gannett Fleming during the dry summer of 2002 revealed that the storm sewer buried beneath Nicholson Street contained continuously flowing water. This was interpreted as evidence that the buried storm sewer has replaced the former stream as the groundwater discharge zone in this area (Gannett Fleming, 2006). The current conceptual model for contaminant transport at the site includes discharge of contaminants from the groundwater system along this storm sewer line.

The direction of shallow groundwater flow generally follows the topography (Figure 6). Consequently groundwater flows from the Riggs Road Chevron station across Eastern Ave. toward Nicholson Street. East of 8th street, however, groundwater flow on the Maryland side of Eastern Ave. is approximately parallel to Eastern Ave. The existing remediation system at the former Chevron station impacts the elevation of the water table and flow direction of groundwater, although these effects are limited to the immediate vicinity of the remediation system.

Because of the topographic variation across the site, the depth to groundwater also varies. Near the former Chevron station on Riggs Road, the depth to groundwater is approximately 40 ft (Figure 7). The depth to groundwater decreases with the topographic trends so that along Nicholson and parts of Oglethorpe Streets the depth to groundwater may only be three to four feet. Many homes in this area are built with sumps and sump pumps in the basement to prevent flooding with groundwater. Water from these sumps was sampled by Gannett Fleming in 2002 and 2005 (Gannett Fleming, 2006).

Extent of Free Product and Source Area

Liquid-phase hydrocarbons (LPH), or free-product gasoline has been detected in 18 monitoring wells in the vicinity of the release area (Figure 3; Gannett Fleming, 2006). With one exception, all of these wells are located on the Maryland side of Eastern Ave. The one exception

is well MW-18 on the south side of Eastern Ave. Gannett Fleming (2006) reported that free product was detected in this well only once, in 2002. Dissolved concentrations of some gasoline components, and TPH-GRO have remained at the the ppm level in this well through 2007 (Gannett Fleming, 2007a).

Since the start of petroleum recovery operations in 1990, more than 4,500 gallons of total hydrocarbons have been removed from the source area (Gannett Fleming, 2006). Source area remediation is ongoing, and will include an expansion of activities to the DC side of Eastern Ave. with installation of the final remedy (USEPA, 2008).

Extent of Groundwater Contamination

The extent of groundwater contamination in the Riggs Park neighborhood has been described in a number of key sources. For information on petroleum-related compounds, the following sources were relied upon:

- Gannett Fleming Inc. 2003. Description of Current Conditions Report
- Gannett Fleming Inc. 2006. Site Investigation Report, former Chevron Facility 122208, 5801 Riggs Road, Chillum, Maryland
- Gannett Fleming Inc. 2007 and 2008. Groundwater Monitoring Data in Electronic Format (122208_analytical_11-26-07.xls, 122208_GW_Data_12-08-08.xls). Data Provided to DDOE and DOH by Gannett Fleming
- U.S. Army Corp of Engineers. 2004 to 2006. Maps of Benzene and MTBE in shallow and deep groundwater
- US Environmental Protection Agency, 2007. Statement of Basis - Chevron Gasoline Release at Chillum, Maryland.

Groundwater monitoring wells installed by Chevron are screened either across the water table (shallow wells) or deeper in the water-bearing zone (deep wells). Consequently, maps of the groundwater contamination are reported as either shallow or deep. Gasoline-related contamination is present in both intervals.

Figures 8 and 9 represents the concentrations of benzene in groundwater in the water table and deeper levels from September 2005, based upon samples collected from groundwater monitoring wells. Prior direct-push investigations in 2002 had found concentrations of benzene in exceedance of MCLs extending across a larger portion of the Riggs Park Neighborhood. In particular, samples collected from direct-push locations GP-154a and GP-155a (near the current location of the MW-33 cluster on Nicholson St.) exhibited benzene concentrations up to a maximum value of 1,320 ug/l.

Figures 10 and 11 illustrate the benzene concentrations in groundwater in March 2008 as depicted by the USACE, on behalf of the USEPA. It is important to note that benzene contamination is present outside the contoured area on Figure 10. The USACE's minimum contour interval is 5 ug/l, but they excluded benzene concentrations as high as 51 ug/l from the contoured area on the Maryland side of Eastern Ave. This exclusion represents USACE's

judgment that these detections in shallow groundwater originate from a different source than the rest of the benzene plume.

Figures 12 and 13 illustrate the extent of MTBE in monitoring wells as mapped in 2005 (Gannett Fleming, 2006). Figures 14 and 15 illustrate the MTBE distribution in groundwater as mapped in 2008 by the USACE. In contrast to Figure 11, the USACE has depicted MTBE results in shallow groundwater monitoring wells on the Maryland side of Eastern Ave. (southeast of 8th street) as part of a contiguous plume of MTBE contamination.

For information on the extent and concentrations of PCE in groundwater, the following sources of information were relied upon:

- USEPA, 2002a. Perc Groundwater Results, Deep - Chevron Spring 2002 Direct Push Sampling Round
- USEPA, 2002b. Perc Groundwater Results, Shallow - Chevron Spring 2002 DP Sampling Round
- USEPA, 2004b. Perc Groundwater Results - Chevron July 2004 Sampling Round
- USEPA, 2004c. Perc Groundwater Results - Chevron May 2004 Sampling Round
- Gannett Fleming Inc. 2008. Groundwater Monitoring Data in Electronic Format (122208_GW_Data_12-08-08.xls). Data Provided to DDOE and DOH from Gannett Fleming.

The 2002 mapping results are reproduced as Figures 16 and 17. While these are not the most recent data, they include all of the direct-push locations that were sampled, and therefore show a higher density of sampling than monitoring well data from subsequent years. Only limited data on PCE in groundwater have been provided for the period following 2004. PCE data for 2008, however, indicate that that maximum concentrations of PCE under the Riggs Park neighborhood range up to 43 ug/l, with the maximum concentrations generally observed in the deeper groundwater for the MW-25, MW-27, MW-44, MW-31, and MW-33 well pairs.

Table 2 presents a summary of the compounds reported as detected in groundwater for the period from 1989 to 2008. As noted above, however, this summary is based upon a limited data set. No PCE results, for example, were available for the period from 2005 to 2008.

Section 5

Project Methods and Materials

In this section, the timeline, methods and materials used to complete this project are reviewed. Additional information on the analytical methods, QA/QC procedures and other aspects of the project can be found in the Work Plan and QAPP (SSP&A, 2007).

Timeline

The contract for the Riggs Park Vapor Intrusion Study and Corrective Action Plan was awarded to S.S. Papadopoulos & Associates on October 18, 2007. The kickoff meeting with DOH staff, including DOH's technical representative (COTR) took place on October 25, 2007. As indicated on Figure 18, the project proceeded as follows:

- Preparation of the Work Plan and Field Readiness Documents from October 25th 2007 to January 8, 2008
- Residents were contacted, and Access Agreements collected in several phases during the period from December 13th 2007 to March 14, 2008
- First Quarter (Q1) VMP Installation and Sampling were completed during the period from January 14th to April 4th, 2008
- First Quarter analytical results were forwarded to DOH on June 24, 2008
- Second Quarter (Q2) GMP Installation was completed during the period from April 1st to May 20th, 2008
- Second Quarter (Q2) Sampling was completed during the period from April 15th through June 27, 2008
- Second Quarter analytical results were forwarded to DOH on July 22, 2008
- Third Quarter (Q3) Sampling was completed during the period from July 15th to September 12, 2008
- Third Quarter analytical results were forwarded to DDOE on October 17, 2008, with an updated and final data set provided on November 4, 2008

Activities

As noted earlier in this report, the primary site activities for this project included:

- Indoor/outdoor air sampling in 115 homes (Table 2)
- Sub-slab and outdoor vapor port installation and sampling at 118 homes

The following tasks were undertaken as part of the sample collection process:

Contacting Homeowners and Obtaining Access Agreements

All sampling for this project was completed on private property in the Riggs Park neighborhood. Testing was voluntary, and signed access agreements were required from all

participants prior to sampling. The information packets and access agreements sent to residents are reproduced in Appendix A. Signatures only of homeowners, not renters or other residents, were accepted for participation in this study.

Potential sampling locations were initially based upon results of the prior DOH study (BSEA, 2006). The initial target homes were the 97 homes sampled in 2006, and the co-slab homes of the 53 highest priority homes identified for re-sampling. After contacting these homeowners, additional sampling targets were identified.

Over 300 homes were contacted and provided with information packets for review. Of these, 144 residents returned signed access agreements with a positive response. Ten additional homeowners returned access agreements declining to participate in the study. Of these 144 potential participants, some subsequently declined to participate, and others were either unable, or unwilling to schedule sampling appointments. Ultimately, indoor air samples were collected from 115 homes. Another three homeowners were either unable or unwilling to participate in the 3-day indoor air sampling protocol, but did agree to installation of outdoor GMPs on their property. Subsurface samples were therefore collected from a total of 118 homes.

Pre-VMP Installation Survey

Prior to installation of sub-slab VMPs, a survey of the basement area was completed to determine the presence of pre-existing VMPs, evidence for past flooding, and general suitability for VMP installation. Sub-slab VMPs were not installed in homes in which there was evidence of past flooding due to high groundwater levels or in which the owner expressed significant concern over such flooding. In addition, VMPs were not installed in some homes where the groundwater was known to be shallow and close to the slab elevation (e.g. parts of Nicholson Street). At these homes outdoor VMPs were installed instead during the second quarter. The completed survey forms are found in Appendix B. To maintain anonymity of information about specific homes, Appendix B is marked as confidential.

Pre-Indoor Air Sampling Survey

As per recommended procedures (USEPA, 2002), home surveys were completed prior to indoor air sampling. The purpose of these surveys was to collect information on resident demographics, home construction, and resident activities that might influence indoor air results (e.g. smoking or recent renovations), and to identify chemicals that might interfere with the indoor air testing. All chemicals identified were collected in bins, and removed to an outside location at least 24 hours before sampling began. The completed home survey forms are found in Appendix C. To maintain anonymity of information about specific homes, Appendix C is marked as confidential.

Sub-Slab Vapor Monitoring Port Installation

The methods for installing VMPs were based on USEPA's November 2002 Draft Guidance for Evaluating the Vapor Intrusion to Indoor Air Pathway from Groundwater and Soils (Subsurface Vapor Intrusion Guidance) and the USEPA Region 3 Standard Operating Procedures (SOP) for "Construction and Installation of Permanent Sub-Slab Soil Gas Wells" (USEPA, 2004f).

During installation of the sub-slab VMPs, an electric hammer drill was used to drill core holes through the concrete basement floor of the home. The sub-slab VMPs were then built using 1/4-inch OD stainless steel tubing, and Swagelok[®] fittings with Teflon tubing attached to each assembly. Expansive concrete was used to seal the VMPs into the concrete floor. When water was encountered in any sub-slab hole during installation or purging for sampling, the boring was abandoned by sealing with expansive concrete grout.

The project Work Plan called for collection of soil samples during VMP installation. Because of the difficulty and disruption associated with collection of these samples, with the COTR's prior approval, soil samples were not collected from the sub-slab locations.

The majority of ports were screened within the soil/fill immediately below the concrete slab. In some homes, duplicate VMPs were installed to assist in evaluation of sub-slab vapor heterogeneity. In selected homes, additional ports were also installed to a depth of approximately 2.5 ft. Some existing VMPs from previous studies were encountered in the basements. When possible, the depths of these ports were measured. Some of these were sampled during subsequent sampling events. These samples are annotated as PVMPs (for pre-existing VMPs).

Outdoor Vapor Monitoring Ports

During the second quarter of this study, Outdoor Vapor Monitoring Ports (GMPs) were installed using a track-mounted Geoprobe-model 54LT direct push equipment. As per the work plan (SSP&A, 2007) each GMP was constructed in the boring using a 1/4-inch OD stainless steel screen point and small diameter Teflon tubing. A glass bead filter medium was placed around the screen point and a portion of the tubing. The remainder of the annular space around the tubing was back-filled with bentonite followed by native soil. For each VMP, the tubing was extended above the ground surface, capped, and coiled within the surface completion. Surface completions consisted of blank PVC casings with a PVC cap. The soil core extracted during the deepest geoprobe push at each location was described, and the depth to water and/or soil saturation was noted, if present.

For each boring location, a soil and/or groundwater sample was collected for VOC analysis by USEPA Method 8260 at the deepest point of the push. At some locations, refusal or the target push depth was encountered before groundwater was reached. In these cases, soil samples were collected from the bottom of the core sample. When a saturated zone was

encountered, a sample of the saturated soil was collected for analysis, and a water sample was collected if sufficient water was produced in the hole.

Locations for the GMPs were based upon suitability of homes for indoor VMP installation, first quarter sampling results and previous investigation data. Some homes were identified for GMP installation because VMP installation was precluded. Locations for additional GMPs were generally identified as those homes with the highest concentrations of benzene, and/or PCE in previous sampling. GMPs were placed as close to each home as practical within the property boundary. In many cases, access to the property was limited by fences, ledges or other structures. If access to the front, side, or back yard was not possible, the GMP was completed in the alley behind the home. Depths for the geoprobe VMPs were based upon the estimated depth to groundwater at each location.

During the third quarter of sampling, some shallow GMPs were replaced using hand auger equipment. These were GMPs that did not produce adequate vapor samples due to water saturation of the soil in the screened interval and several that were damaged or paved-over subsequent to initial installation and sampling. These Q3 GMP replacements were installed at depths of 1 to 2 feet bgs. All other construction details were the same as those built using the Geoprobe equipment.

Sampling and Analysis Methods

Pre-evacuated, cleaned, and certified summa canisters and associated regulators were obtained from two laboratories

- Spectrum Analytical (the primary laboratory), and
- Pace Analytical (the secondary laboratory).

Each canister was delivered directly to Chesapeake GeoSciences, and returned to the laboratory with chain of custody records by staff of Chesapeake GeoSciences. Because of the large number of Spectrum Analytical canisters used during each week of sampling, these were delivered by truck and picked up by laboratory staff at the offices of Chesapeake GeoSciences in Columbia, MD. All canisters were used within the holding times appropriate to ensure maintenance of the laboratory vacuum.

Vapor samples were analyzed using the Modified EPA Method TO-15 Low Level consistent with EPA/625/R-96/010b, METHOD TO-15 "Determination of Volatile Organic Compounds (VOCs) In Air Collected In Specially-Prepared Canisters and Analyzed by Gas Chromatography/Mass Spectrometry." The TO-15 analyte lists and MDLs for each of the two analytical laboratories are included as appendices in the Work Plan (SSP&A, 2007). Spectrum Analytical's original TO-15 analyte list included 61 parameters. Over the course of the study, additional analytes were added to the list, increasing the total to 68.

Soil and groundwater samples were analyzed by Phase Separation Science laboratories. Sample containers, as specified in the Work Plan, were obtained from the laboratory. After

collection, these samples were shipped via express carrier to the laboratory in chilled coolers with chain of custody documentation. Soil and groundwater samples were analyzed via USEPA Method 8260.

For each target home, every attempt was made to sample indoor air and vapor monitoring ports simultaneously. In some cases, however, due to equipment issues (typically regulator flow rates that did not meet QC criteria) the indoor air and VMP samples may not have been collected on the same day. The actual sample date for each sample is reported in the results section of this report.

Indoor Air Sampling

Each indoor sampling event required three visits to the home on sequential days. On the first day, the field crew (2-person minimum) completed a pre-sampling survey form, and removed from the home chemicals with potential to interfere with the sampling. During surveying of the home, the ppb-RAE PID device was used to screen the home and identify any specific hot spots that might indicate indoor sources of VOCs.

On the second day of sampling, the field crew returned to place the Summa canister(s). All indoor air samples were collected from the basement or lowest level of the homes in pre-evacuated 6-liter certified summa canisters. The samples were fitted with regulators calibrated to 24 hours. During placement of the canisters, PID readings were recorded near the canister, and the location noted on the field sheets. When the regulator valve was opened, the time and date were noted on the field sheets, together with the starting canister vacuum. After opening of the valve, the field crew waited for 5 to 10 minutes to observe the progress of the vacuum gauge. If an unacceptable rate of vacuum loss was noted, the equipment was replaced.

On the third day, the field crew returned to retrieve the canister as close as possible to 24-hours after placing the canister. The time and date were noted on the field form together with the final vacuum of the regulator.

One duplicate indoor air sample was collected for every 10 regular indoor air samples. The duplicate samples (submitted to the independent laboratory for comparative analysis) were noted on all field sheets with the same information as the primary samples.

Ambient Air Sampling

At least one ambient air sample was collected for each day during which indoor air samples were obtained. During the primary period of indoor air sample collection (the first quarter of sampling) two ambient air samples were collected each day of indoor air sampling.

Locations for the ambient air samples were selected randomly from amongst the homes scheduled for that day. The canister was fitted with a 24-hour regulator, and typically situated in

a backyard, away from any obvious VOC sources. All other procedures for record keeping and chain of custody were the same as for the indoor air samples. Although each ambient air sample is identified with a home identification number, that number is solely intended as a record of the sampling location; ambient air samples were intended to represent ambient air for the entire neighborhood for the day of collection. One duplicate ambient air sample was collected for every 10 regular ambient air samples.

Vapor Monitoring Port Samples

Collection of sub-slab vapor monitoring port (VMP) samples and outdoor vapor monitoring port (GMP) samples was accomplished in two-day sampling visits. During the initial visit, downhole readings of ambient PID levels were collected with the ppb-RAE PID and noted on the field sheets (see Appendices).

Canisters were attached to the VMP and GMP locations using Teflon tubing. The tubing was discarded after a single use. When duplicate samples were required, a T-junction was used to connect the VMP or GMP to both canisters. On the second day, the field crew returned to retrieve the canister as close as possible to 24-hours after placement. The time and date were noted on the field form together with the final vacuum of the regulator. If the total sampling time exceeded 24 hours, the sample is annotated in the results section of this report.

Section 6

Results

In this section of the report, the sampling results are reported by medium and sample type. Some information on the statistics of each data population is also provided. A summary of the samples collected is provided in Tables 3 and 4. Completed sampling forms can be found in Appendices D through G. Laboratory Data Sheets can be found in Appendices H through N. Quarterly monitoring reports can be found in Appendix O.

Analytical methods at the primary laboratory included standard TO-15 GC/MS analysis, as well as TO-15 analysis with selected ion monitoring (TO-15 SIMS). For some analytes with high concentrations, the greater sensitivity of the SIMS method yielded results flagged with an "E" qualifier indicating an estimated value. In these cases, if the standard TO-15 method produced an unqualified result, the standard TO-15 result is reported here. All laboratory results, flagged and otherwise, can be found in the Appendices.

For consistency with previous reports, analytical results for the target compounds are presented in units of micrograms per cubic meter (ug / m^3). Results for the Total Volatile Hydrocarbons (C5-C12), however, were reported by the laboratory in units of parts per million, by volume (ppmV). Because there is no single molecular weight associated with the TVH parameter that can be used to convert to ug / m^3 , these results are presented in ppmV.

Total Volatile Hydrocarbons (C5-C12) is a calculated parameter indicating the overall presence of volatile compounds. It does not reflect the presence or absence of a single compound. In the following discussions, the term "compounds" is used to describe analytical parameters, although it is recognized that TVH does not represent a single compound. Similarly, the m- and p-xylenes are reported as a single analytical result, although they represent two different chemical compounds.

Detection of any specific compound or its discussion below does not necessarily indicate a risk to human health or the environment associated with that compound. Potential risks from these results are not discussed in this report.

Ambient Air Samples (AOA)

Thirty-nine (39) ambient air samples were collected during Q1, Q2, and Q3 sampling events. Each sample was collected concurrent with at least one indoor air sampling event. Although each ambient air sample is labeled with a home identification number, that ID number is solely intended a record of the sampling location; these samples are intended to represent ambient air for the entire neighborhood for the day of collection.

The complete list of analytes detected in the ambient air samples is included in Table 5. Statistical measures describing the data populations are presented in Tables 6 and 7. A total of 38 analytes were detected. Those detected in greater than 50% of the samples were:

- Ethanol
- Isopropyl alcohol
- Toluene
- Chloromethane
- Trichlorofluoromethane (Freon 11)
- Acetone
- Benzene
- m,p-Xylene
- Total Volatile Hydrocarbons C5-C12
- 2-Butanone (MEK)
- Dichlorodifluoromethane (Freon12)
- Methylene chloride
- Hexane
- n-Heptane

A graphic representation of the data in Table 4 is presented in Figures 19 through 22, illustrating the range of detections of selected compounds. The complete data populations are depicted graphically in Appendix O.

Indoor Air Samples (INA)

A total of 128 indoor air samples were collected at 115 homes. Some of these samples from the first quarter of sampling exhibited elevated detection limits for certain compounds that did not meet the project's quality criteria. Following discussions with the laboratory, analytical procedures were modified and repeat samples were collected from those homes. All analytical results are presented in the Appendices.

The complete list of analytes detected in the indoor air samples is included in Table 5. A total of 47 were detected. Those detected in more than 50% of the samples were:

- Ethanol
- Isopropyl alcohol
- Toluene
- Acetone
- Chloromethane
- Total Volatile Hydrocarbons C5-C12
- Benzene
- Dichlorodifluoromethane (Freon12)

- 2-Butanone (MEK)
- m,p-Xylene
- Hexane
- Trichlorofluoromethane (Freon 11)
- Ethyl acetate
- n-Heptane

A graphic representation of these data is presented in Figure 20.

Sub-Slab Vapor Monitoring Ports (VMPs)

A total of 378 sub-slab vapor samples were collected during the first, second and third quarters of this study. These were collected from 106 homes, and are listed in Tables 3 and 4. A total of 64 analytes were detected in the sub-slab samples (Table 5). Those detected in greater than 50% of the samples were:

- Acetone
- Total Volatile Hydrocarbons C5-C12 (ppmV)
- Trichlorofluoromethane (Freon 11)
- 2-Butanone (MEK)
- Tetrachloroethene
- Toluene
- Ethanol
- Dichlorodifluoromethane (Freon12)
- Isopropyl alcohol
- Benzene
- 2-Hexanone (MBK)
- Chloroform
- 1,4-Dichlorobenzene
- n-Heptane
- Ethyl acetate
- m,p-Xylene

A graphic representation of the data in Table 5 is presented in Figure 21.

Outdoor Vapor Monitoring Ports (GMPs)

A total of 151 samples were collected from the outdoor vapor monitoring ports (GMPs) installed at 66 homes. A total of 48 analytes were detected in the GMP samples. Those detected in more than 50% of the samples were:

- Total Volatile Hydrocarbons C5-C12 (ppmV)
- Acetone
- Carbon disulfide
- Ethanol
- Isopropyl alcohol
- 2-Butanone (MEK)
- Propene
- Toluene
- 2-Hexanone (MBK)

A graphic representation of these data is presented in Figure 22.

Soil Samples

Locations of the soil samples collected during outdoor vapor monitoring ports (GMPs) installation are shown in Figure 23 and Table 8. Of the 69 soil samples collected, 19 were collected from saturated soil – either the water table or a perched zone of groundwater. These are indicated on Figure 23.

Compounds detected in the soil samples were

- Acetone
- m,p-Xylenes
- Methyl-t-butyl ether
- Naphthalene
- o-Xylene

Acetone, in addition to occurring naturally as a metabolic by-product, is a common laboratory contaminant in soil and groundwater analyses, and may not be representative of actual soil contamination. Acetone was detected in 3 locations. The other compounds detected in soil were found in a single sample collected from the alley between Oglethorpe St. and Eastern Ave at a depth of 28 ft. The depth to water at this location was approximately 25 ft after the hole filled with water. From a depth of about 24 to 28 ft, the geoprobe core was characterized by high PID readings.

Concentrations of these compounds in that sample were:

- m,p-Xylenes 4,000 ug/kg
- o-Xylene 2,100 ug/kg
- Naphthalene 3,000 ug/kg

Detection of these compounds at this location is consistent with the presence of residual gasoline in the "smear zone." A "smear zone" is an area of soil contamination formed when

liquid phase gasoline (which is less than dense than water) has migrated atop the water table and been "smeared" across the soil with rising and falling water levels. These detections suggest that liquid-phase gasoline from the release at 5801 Riggs Road migrated at least as far as this location.

The location of this soil contamination is within Area B identified by USEPA for additional remedial measures in its Final Decision and Response to Comments on the Chillum Gasoline Release (see Figure 1 in USEPA, 2008). While no benzene was detected in soil from this location, it is important to note that USEPA recognizes that the shallow groundwater benzene plume did extend at least this far in 2008 (Figure 10). Subsequent data for wells MW-24a and MW-24b confirm the presence of the other dissolved BTEX constituents (toluene, ethylbenzene and xylenes) through 2008.

Groundwater Samples

Fourteen groundwater samples were collected from the geoprobe borings described above (Table 8). The compounds detected were:

- Acetone
- Chloroform
- Methyl-t-butyl ether (MTBE)
- Tetrachloroethene (PCE)

Chloroform is a laboratory and industrial solvent, as well a common byproduct of water chlorination. It may be present in urban groundwater due to use of public water supplies for watering of lawns and other activities that discharge treated water to the ground (Ivahnenko and Zogorski, 2006).

The most commonly detected compound in groundwater samples was MTBE, which was detected in more than half of the samples (Table 9). The presence of MTBE in these shallow groundwater samples is generally consistent with the known maximum extent of shallow groundwater contamination. The location of the highest concentration (83 ug/l) in the area between Oglethorpe and Nicholson Streets is also consistent with previous mapping (Figures 12-15). The low-concentration detections on the order of 2-8 ug/l northeast and northwest of 6th street, were not reported for the shallow groundwater in 2008 (Figure 14).

The detection of PCE is also generally consistent with the previously reported distribution of contaminants in the shallow groundwater. The two monitoring wells situated closest to the PCE detection in groundwater are MW-27A and MW-44A. Sampling results from these two wells in 2008 yielded 5.9 ug/l and 6.2 ug/l respectively. The PCE detection at location S199 was 7 ug/l.

Data Validation

An important part of the data collection effort was Quality Control / Quality Assurance (QA/QC) and data validation. Methods for QA/QC are addressed more fully in the Quality Assurance Project Plan (QAPP) included with the Work Plan (SSP&A, 2007).

Field QA/QC

During data collection, every effort was made to ensure that field activities conformed with the data quality objectives of this project, and that data were collected according to the required protocols. Substantial emphasis was placed on appropriate installation of VMPs, sampling protocols, and field record keeping. All field notes are reproduced in the Appendices to this report. Key information recorded for each sample included

- the exact sample location(s),
- Summa canister and regulator ID numbers,
- times and vacuums during canister placement and pickup,
- PID calibration data
- any other information that might have impacted sample collection.

Laboratory QA/QC

The Quality Assurance Manual for Spectrum Analytical Inc. is included as an Appendix to the QAPP. The other two laboratories used for this project also maintain detailed QA manuals. At all stages of this project, the Project Managers from SSP&A and CGS were in contact with the analytical laboratories to ensure that laboratory procedures were in compliance with the project and laboratories' QA/QC procedures.

Independent Laboratory Duplicates

As per the work plan, a duplicate sample was collected for at least ten percent of vapor samples (Table 10). These duplicates were sent to Pace Analytical Laboratories for analysis via method TO-15 (modified). The analyte lists for method TO-15 (modified) for the primary and secondary laboratories vary somewhat (see SSP&A, 2007), but include all of the target compounds required in the original scope of work and work plan, with similar nominal detection limits.

Figure 24 illustrates the correspondence between data from the primary and secondary laboratories for selected compounds. Many of the compounds are present at concentrations close to the detection limits. All non-detects are plotted at $0.1 \text{ ug} / \text{m}^3$ on Figure 24 (except for TVH, for which they are plotted at 10 ppbV). As seen on Figure 24, for all the compounds illustrated, there is a positive correlation between the results from the two laboratories. The data are generally distributed about the 1:1 line, with greater scatter apparent at lower concentrations. Detection limits from the secondary lab are generally higher than those reported from the

primary lab. Consequently, at low concentrations, the correspondence between the laboratories is more variable.

Spatial Duplicates (VMPs)

The concentrations of any compound in samples from a single home are expected to exhibit some variation. These variations may occur over time (temporal variation) or by sampling location (spatial variation). In fourteen (14) homes, more than one sub-slab VMP was installed. These VMPs were installed to the same depth, but in different parts of the basement for each home. They serve as spatial duplicates to provide a check upon the consistency of the sampling results, and the potential for subsurface heterogeneity to influence the sampling results. For each home with multiple VMPs, each VMP was sampled on the same schedule, and analytical results were obtained from the same laboratory.

A comparison of results from duplicate VMPs is presented in Figure 25. These results represent a selection of the compounds most frequently detected. As can be seen from these diagrams, there is a positive correlation between results from the paired VMPs. This indicates that subsurface concentrations of contaminants are correlated for the same home, regardless of VMP location. While subsurface heterogeneity exists, and may impact individual measurements, these data suggest that it is generally not sufficient to be the primary factor impacting sampling results at the scale of individual homes.

Section 7

Evaluation of Air and Vapor Sample Results

As described above, many compounds were detected in the vapor and air samples. Thirty-eight (38) compounds were detected in the ambient air samples and 64 were detected in the sub-slab samples. A smaller number of compounds were detected in the soil and groundwater samples.

The number of compounds detected does not by itself indicate the relative degree of contamination. Detection of any analytical parameter depends upon a number of factors including the detection limit for each sample. The detection limit is itself influenced by the analytical method, the presence of other compounds and their concentrations in each sample.

Appendix O contains cumulative frequency diagrams for each analyte. In these diagrams, for each group of samples (e.g. indoor air, ambient air, sub-slab vapor monitoring ports and outdoor vapor monitoring ports) the complete set of results is sorted by value, and plotted in ascending order. Non-detect results are plotted at the value of the detection limit, and are indicated by open symbols. Detections are indicated by filled symbols. A review of these curves indicates that for each parameter, the lowest detection limits are generally associated with the sub-slab VMP samples, and the highest with the outdoor GMP samples. The higher detection limits for the GMP samples likely originate in part from preferential placement of the GMPs. They were installed at depths closer to potentially contaminated groundwater than were most VMPs, and for many compounds of interest, the highest concentrations are observed in the GMP samples (see below). In addition, the higher detection limits in some GMP samples may reflect anomalously high concentrations of acetone, tetrahydrofuran, and 2-butanone (MEK) and carbon disulfide. These compounds are unlikely to represent actual subsurface conditions, and may reflect factors associated with construction of the GMPs. Nonetheless, the detection limits for benzene and PCE, for example, are as low as 0.1 ppbV, and population of compounds detected is similar to that for the VMP samples.

Figure 26 illustrates the analytes detected in ambient and indoor air samples. Forty-seven (47) analytes were detected in indoor air, and 38 were detected in ambient outdoor air. Two compounds were detected in ambient air, but not indoor air. Those two compounds (trans-1,3-dichloropropene and 1,2,4-trichlorobenzene) were only detected in a single ambient air sample. The 11 compounds detected in indoor air, but not ambient air, were detected in no more than 3 indoor samples each. Overall, these results indicate that the population of compounds detected in indoor and ambient air samples are similar.

The frequency of detection between the indoor and ambient air data populations, varies between the two data sets. For example:

- cyclohexane was detected in about 27% of the indoor air samples, but in fewer than 3% of the ambient air samples

- Carbon tetrachloride was detected in 26% of the ambient air samples, but only 6% of the indoor air samples
- 1,4-dichlorobenzene was detected in 49% of the indoor air samples, but only 10% of the ambient air samples
- Ethyl acetate was detected in 61% of the indoor air samples, but only 10% of the ambient air samples
- Methylene chloride was detected in 72% of the ambient air samples, but only 46% of the indoor air samples
- Naphthalene was detected in 21% of the indoor air samples, but in none of the ambient air samples
- Trichlorofluoromethane (Freon 11) was detected in 100% of the ambient air samples, but only 73% of the indoor air samples.

Figure 27 illustrates a similar comparison between the indoor air samples and the sub-slab vapor monitoring port samples. Sixty-four (64) analytes were detected in the sub-slab samples, and 47 were detected in the indoor air samples. Only one compound, 1,3-butadiene detected in indoor air was not detected in the sub-slab samples. (Butadiene was detected in 7% of the indoor air samples.) There are 18 analytes that were detected in the sub-slab VMPs that were not detected in any indoor air samples. Of these, n-butyl benzene (in 17% of the sub-slab samples) occurred most frequently (see note on Table 5 regarding frequency of testing for compounds added to the TO-15 list). Overall, these results indicate that the population of compounds detected in indoor and sub-slab samples are very similar.

The frequency of detection between these data populations, however, are not identical. For example,

- Carbon disulfide was detected in 31% of the sub-slab VMP samples, but only 4% of the indoor air samples
- Carbon tetrachloride was detected in 30% of the sub-slab VMP samples, but only 6% of the indoor air samples
- Chloroform was detected in 58% of the sub-slab VMP samples, but only 24% of the indoor air samples.
- Chloromethane was detected in 95% of the indoor air samples, but only 23% of the sub-slab samples.
- Ethylbenzene was detected in 31% of the indoor air samples, but only 13% of the sub-slab samples
- Hexane was detected in 75% of the indoor air samples, but only 40% of the sub-slab samples
- 2-Hexanone (MBK) was detected in 60% of the sub-slab air samples, but only 7% of the indoor air samples
- Methylene chloride was detected in 46% of the indoor air samples and 25% of the sub-slab samples
- Naphthalene was detected in 21% of the indoor air samples but only 2% of the sub-slab samples

- The m,p-xlyenes were detected in 78% of the indoor air samples, but only 50% of the sub-slab samples
- PCE (tetrachloroethene) was detected in 95% of the the sub-slab samples, but only 31% of the indoor air samples
- 1,1,1-Trichloroethane was detected in 37% of the the sub-slab samples, but only 10% of the indoor air samples
- Trichloroethene (TCE) was detected in 26% of the the sub-slab samples, but only 6% of the indoor air samples
- 1,1,2-Tirchlorotrifluoroethane (Freon 113) was detected in 44% of the the sub-slab samples, but only 8% of the indoor air samples.

Figure 28 illustrates a comparison between the sub-slab vapor monitoring port samples and those collected from the outdoor vapor monitoring ports (GMPs). Forty-eight analytes were detected in the outdoor GMP samples, compared to 64 in the sub-slab samples. As noted above, detection limits for the GMP samples were generally higher than those for the VMP samples. Consequently, compounds at low concentration may have been detected more frequently in the VMP sample population than in the GMP sample population.

Bearing these issues in mind, it is noted that:

- Benzene was detected in 67% of the sub-slab VMPs, but only 12% of the GMPs
- MTBE was detected in 11% of the GMPs, but only 5% of the sub-slab VMPs
- Carbon disulfide was detected in 95% of the GMPs, but only in 31% of the VMPs
- 1,4-dichlorobenzene was detected in 56% of the sub-slab VMPs, but only 11% of the GMPs
- Dichlorodifluoromethane (Freon 12) was detected in 94% of the sub-slab VMP samples, but only 43% of the GMP samples
- Ethyl acetate was detected in 50% of the sub-slab VMPs, but only 21% of the GMPs
- Methylene chloride was detected in 25% of the sub-slab VMPs, but only in 3% of the GMPs
- Propene was detected in 82% of the GMP samples, but only 14% of the sub-slab VMP samples.
- Tetrachloroethene (PCE) was detected in 95% of the VMP samples, but only 29% of the GMP samples
- Tetrahydrofuran was detected in 25% of the VMP samples, but only 9% of the GMP samples
- 1,1,1-Trichloroethane (111-TCA) was detected in 37% of the VMP samples, but only 4% of the GMP samples
- Trichlorofluoromethane (Freon 11) was detected in 95% of the sub-slab VMPs, and only 25% of the GMPs
- 1,1,2-trichlorotrifluoroethane (Freon 113) was detected in 44% of the VMPs, but only 3% of the GMPs.

As discussed above, installation of VMPs was not possible in some homes. Consequently, for these homes, outdoor GMPs were installed instead. Nonetheless, several studies have shown that there can be a significant difference in soil vapor concentrations below and adjacent to buildings (Hers et al., 2001). Concerns over false negative results from exterior soil vapor sampling has limited its use in determining vapor intrusion problems (Boyer, 2004). Exterior soil gas sampling may be an appropriate part of an indoor vapor intrusion study, when for example, occupants are (as in some Riggs Park homes) not receptive to drilling a hole in the slab (Boyer, 2004). While the elevated detection limits may mask some low concentrations of contaminants in the outdoor vapor samples, it is important to note that the maximum concentrations of many compounds were also detected in the GMPs.

Compounds Likely Unrelated to Subsurface Contamination

While it is not the intent of this report to exclude from consideration potential contaminants, there are a number of compounds detected that are unlikely to be related to subsurface contamination. These are compounds that are commonly detected in ambient and/or indoor air, and are unlikely to provide information about the subsurface environment. For example, the chlorofluorocarbons (CFCs)

- Dichlorodifluoromethane (Freon 12)
- 1,2-Dichlorotetrafluoroethane (Freon 114)
- Trichlorofluoromethane (Freon 11)
- 1,1,2-Trichlorotrifluoroethane (Freon 113)

are widely disseminated, common, and relatively persistent chemicals in the atmosphere. Studies have shown the presence of these chemicals in the ambient air and subsurface. Pankow et al. (2003) found average values of these compounds in semi-rural and urban areas consistent with values observed here.

Similarly, the compounds ethyl acetate, 4 ethyl-toluene, and the alcohols are excluded from further discussion, as they are not typical of the groundwater or soil contaminants observed in the Riggs Park neighborhood. Finally, some common solvents acetone, MEK, MIBK, carbon disulfide, and tetrahydrofuran are excluded because they may represent laboratory or sampling contamination, and are not indicative of groundwater contamination. Propene, a compound that exists in a vapor-phase at ambient conditions, appears to be preferentially observed in the GMP samples, and is not known to be associated with gasoline-related contamination at the site. It is also excluded from further discussion.

Data Population Analysis

Tables 6 and 7 presents summary statistics for selected analytes grouped by common sources or characteristics. These groupings are not intended to represent an evaluation of provenance. Cyclohexane, for example, is a compound found in gasoline. It is also, however, a

common laboratory solvent and component of gasoline exhaust. Similar limitations apply to all these compounds – each has multiple uses, and potential sources. The grouped compounds are as follows:

Petroleum-Related Compounds

- Benzene
- Toluene
- Ethylbenzene
- Xylenes (m,p- and o-)
- Naphthalene
- MTBE
- Trimethylbenzenes (1,2,4- and 1,3,5-)
- Cyclohexane
- Hexane
- n-heptane

Chlorinated Solvents

- Tetrachloroethene (PCE)
- Trichloroethene (TCE)
- 1,1,1-Trichloroethane (111-TCA)
- Chloroform
- Chloromethane
- 1,4-Dichlorobenzene

In Table 6, each sample population – the Ambient Air, Indoor Air, Sub-Slab VMP Samples, and Outdoor GMP Samples, are addressed separately. In its Risk Assessment Guidance, the USEPA recommends that the average concentration of a compound be used to represent a reasonable estimate of the concentration likely to be contacted over time. Because of the uncertainty associated with estimating the true average concentration at a site, the USEPA recommends that the 95 percent Upper Confidence Limit (UCL) of the arithmetic mean should be used (USEPA, 1992, 2002d).

In this study, the USEPA software ProUCL 4.0 was used to calculate UCLs for the ambient air data. Some of the data populations were determined by ProUCL to exhibit lognormal or gamma distributions, and thus are suitable for calculation of the UCL via parametric methods. The data distributions for other data sets were not determined to display a discernible distribution. For these datasets, the UCL was calculated via non-parametric methods. When more than one non-parametric method was suitable for UCL calculation, the highest estimate of the UCL is cited. Generally, the variation in UCL value calculated using different methods was small ($<1 \text{ ug} / \text{m}^3$).

Figures 29 and 30 illustrates the range of values detected in vapor samples for selected compounds. On each chart, the filled bars represent the interquartile range for each set of detections. The interquartile range represents the data between the 25th to 75th percentiles when all values are ranked in ascending order. Observations about these data populations include:

- For the selected petroleum-related compounds,
 - the concentration values for each compound range over several orders of magnitude
 - all but naphthalene and MTBE were detected in ambient air
 - the maximum concentrations and 75th percentile concentrations for indoor air samples generally exceed those from the ambient air samples
 - for each compound, the maximum concentrations and 75th percentile concentrations are generally associated with the GMP data
 - the minimum detections are generally associated with sub-slab VMP samples
- For the selected chlorinated solvents,
 - the concentration values for each compound range over several orders of magnitude
 - all the compounds were detected in each of the four sample groups (indoor air, ambient air, VMPs, and GMPs)
 - For TCE, 111-TCA, chloroform, and chloromethane, the maximum detections were in the VMP samples
 - The maximum concentrations of 1,4-dichlorobenze are found in the indoor air samples
 - For PCE, the maximum concentrations and 75th percentile concentrations are similar in both the VMP and GMP sample populations; these exceed the maximum and 75th percentile values for indoor air and ambient air.

Comparison of Ambient Air Data from Other Studies

Many of the results cited above for ambient air are consistent with data from other studies of urban environments. For example, the 95% UCL of the mean benzene concentrations in this study was $1.1 \text{ ug} / \text{m}^3$. In comparison, a 2003 study found the average benzene concentration in highly urbanized areas in Massachusetts, California, and New Jersey to range from 0.4 to $3.5 \text{ ug} / \text{m}^3$ in 1999 to 2000 (Pankow et al., 2003). While sampling methods in that study utilized adsorbent cartridges rather than Summa canisters, a number of studies have cited a good correspondence of results between these two types of samples (Aleksic et al., 2005, Spicer 1986 cited in Wallace, 2001, Jia et al., 2008a).

Similarly, a California Air Resources Board study (California Air Resources Board, 1992) found the median values of benzene to range from 0.77 to $1.1 \text{ ug} / \text{m}^3$. Closer to the Riggs

Park neighborhood, the average result of 60 ambient benzene samples collected at the McMillan Reservoir in Washington DC in 2005 was $0.92 \text{ ug} / \text{m}^3$ (DDOE, pers. Comm.)

For toluene, which was detected in 100% of the ambient air samples, the 95% UCL of the mean value of $2.5 \text{ ug} / \text{m}^3$ is consistent with the Pankow et al. (2003) mean values ranging from 1.5 to $10.2 \text{ ug} / \text{m}^3$. The 2005 mean concentration for toluene at the McMillan reservoir was $1.94 \text{ ug} / \text{m}^3$.

PCE was detected in 28% of the ambient air samples collected for this study. The range of detected values (0.61 to $4.95 \text{ ug} / \text{m}^3$) and the 95% UCL of the mean value ($1.1 \text{ ug} / \text{m}^3$) are consistent with values observed at the MacMillan Reservoir from 2000 to 2007. Mean concentrations reported in Pankow et al. (2003) ranged from 0.26 to $2.3 \text{ ug} / \text{m}^3$.

Comparison of Vapor Data to Previous Studies

Comparison of the data on Tables 1 and 5 illustrates the relationships between the current data set, and data collected in previous studies. For example:

- For indoor air samples
 - The maximum benzene detected in this study was $8.36 \text{ ug} / \text{m}^3$; this result is within the range of indoor (basement) values obtained from previous Riggs Park studies:
 - the maximum value detected in the USEPA/Chevron studies was $13 \text{ ug} / \text{m}^3$
 - the maximum reported for the BSEA 2006 study was $26.8 \text{ ug} / \text{m}^3$
 - the maximum value observed in winter 2007 studies by DOH was $6.6 \text{ ug} / \text{m}^3$
 - The maximum value of MTBE detected in this study ($1.77 \text{ ug} / \text{m}^3$) is lower than the maximum reported in other studies 25.0 to $63.5 \text{ ug} / \text{m}^3$
 - The maximum concentration of PCE detected ($42.31 \text{ ug} / \text{m}^3$) is higher than that reported from previous data sets ($23.1 \text{ ug} / \text{m}^3$, $38.9 \text{ ug} / \text{m}^3$, and $3.3 \text{ ug} / \text{m}^3$), although in a similar range
- For Subsurface (VMP and GMP samples)
 - The maximum detections of benzene ($24.9 \text{ ug} / \text{m}^3$), toluene ($173.7 \text{ ug} / \text{m}^3$), MTBE ($667.4 \text{ ug} / \text{m}^3$), and PCE ($929.0 \text{ ug} / \text{m}^3$) are all lower than the maximum reported in previous USEPA/Chevron studies; this may reflect inclusion of samples at depths and geographic locations closer to the source areas in those studies than sampled here

- The maximum concentrations for the xylenes (270.2 and 189.9 $\mu\text{g} / \text{m}^3$) in this study are higher than those reported in previous USEPA/Chevron studies.

Comparison of Indoor Air Data to Ambient Air Data

As can be seen in Figures 29 and 30, the interquartile range and maximum concentrations for many compounds are higher in the indoor air samples than in the ambient air samples. This relationship by itself does not, however, serve as evidence for vapor intrusion from subsurface sources. There are many possible sources of indoor VOCs that may influence concentrations measured indoors.

For example, attached garages are potential sources of BTEX (Dodson et al., 2008; Jia et al., 2008b; Batterman et al., 2006) as would be any gasoline-containing items such as lawnmowers. Other sources of indoor air contamination include recent renovations, indoor smoking, building materials, furnishings, cleaning products, insecticides, hobby supplies, etc. The degree of contamination itself can be related to rates of window/door opening and ventilation rates (Jia et al., 2008b). A USEPA study (Sack et al., 1992) evaluated 1159 common household products for 31 VOCs. Xylenes were among the most common chemicals detected. Other chemicals typically found in relatively high concentrations included PCE and toluene. Sources of BTEX included automotive products, household cleaners/polishes, and fabric and leather treatments (Sack et al., 1992). PCE may be elevated in indoor air when freshly dry-cleaned clothes are stored indoors (Tichenor et al., 1990).

Because these effects are well known, the indoor air sampling protocol required that household chemicals be removed 24 hours prior to sampling. Nonetheless, such removal cannot completely eliminate the impacts of these indoor sources. It is known that sinks such as wallboard, ceiling tile, carpet, and upholstery are important in controlling VOC concentrations over extended periods (Hers et al., 2001; Tichenor et al., 1990). Similarly, seasonal variations in ambient air concentrations in urban communities can have an impact on contaminant concentrations in indoor air (Jia, et al., 2008b).

Geographic Distribution of Data

The geographic distributions of indoor air and subsurface vapor data are depicted on Figures 31 through 34. The zones depicted as Areas 1 to 6 are those used by BSEA in their initial study of the Riggs Park neighborhood on behalf of DOH (BSEA, 2006). For each of the selected contaminants the color scale for concentration ranges are scaled to the maximum values detected in either medium.

As noted above, air and soil vapor concentration data may vary over time as well as by location. For the subsurface data, the maximum value detected at each home is indicated on these maps.

Key observations include the following:

- For the petroleum-related compounds (Figures 31 and 32),
 - With the exception of MTBE, all compounds were detected in the indoor air of each of the six zones.
 - All compounds were detected in at least one location in the subsurface vapor of each of the six zones.
- For the chlorinated compounds (Figures 33 and 34)
 - All compounds were detected in the indoor air of each of the six zones.
 - All compounds were detected in at least one location in the subsurface vapor of each of the six zones.

The highest subsurface concentrations for several compounds were observed in GMP samples southwest of Nicholson Street. Other subsurface detections were also noted in the portion of the study area southwest of Nicholson street. The currently accepted conceptual model for groundwater flow at this site is that groundwater discharge point for the Chevron plume occurs at the storm sewer along Nicholson street. If these results are confirmed, it suggests that the conceptual model for groundwater flow and plume migration may need to be modified, or that there is an additional source of gasoline-related contaminants affecting these portions of the neighborhood.

Section 8

Information from Home Surveys

Prior to indoor air sampling, each homeowner completed a detailed survey form. Household chemicals were identified, and these were removed for 24 hours prior to testing. Some of the information on those survey forms may potentially inform the results of the indoor air testing. These results are summarized on Table 11.

Briefly, key results can be summarized as follows. Of the 115 homes for which indoor air sampling was completed:

- Smokers (occasional or regular) were resident in 21 homes
- Dry cleaned clothes had been present in more than 20 homes within the last several weeks
- Seven homes have an attached garage
- Gas cans, or lawnmowers with gas tanks were stored in the outdoor sheds of 7 homes, and in two homes with attached garages
- None of the residents cited a visit by an exterminator in the past year
- Three residents reported that a household member worked with solvents currently or in the past (car painting, furniture repair)
- About 30 homeowners reported some home repairs or renovations within the six months prior to the home survey and indoor air sampling
- Twenty-two (22) homeowners reported roof repairs or replacement within the past year
- Basement sumps were reported to currently or commonly have water in them, in four homes
- Five basements were equipped with previously installed VMPs from other studies.

Section 9

Ratios of Subsurface to Indoor Air Concentrations

One measure of the potential for vapor intrusion into a home is the observed ratio of contaminant concentrations between the subsurface and the indoor air.

We can define this ratio as $\frac{Conc_{ss}}{Conc_{INA}}$ where

$Conc_{ss}$ is the subsurface concentration (max value), and
 $Conc_{INA}$ is the indoor air concentration.

This definition is the inverse of the vapor/vapor attenuation factor (AF) commonly used in vapor intrusion guidance and studies (e.g. USEPA, 2002c). Other definitions of attenuation factor, including groundwater to indoor air AF are also used in evaluating vapor intrusion.

A previous study cited by USEPA (USEPA, 2002c) found that for homes with greater indoor air than subsurface vapor concentrations of chlorinated solvents, the sub/slab to indoor air ratios ranged from more than 0.1 to less than 0.001. These observations are consistent with the more recent work by McDonald and Wertz (2007) for chlorinated solvents in a New York State residential neighborhood.

Figures 35 and 36 illustrate the ratios of sub-slab to indoor air concentrations for each of the 115 homes which was fitted with a sub-slab VMP. Outdoor GMP data are excluded from this analysis. The maximum value for the sub-slab concentrations are used in these analyses. As can be seen from these graphs

- For both the petroleum-related and chlorinated compounds, the ratio of sub-slab concentrations to indoor air concentrations depends on the individual home and sampling result
- For the petroleum-related compounds, the sub-surface to indoor air ratios range from 182 to .006,
 - ratios are less than 1 for most samples
- The highest ratio is associated with measurements of m,p-Xyylene
- for each of the petroleum-related compounds, the sub-slab concentrations exceed the indoor air concentrations in at least 20% of homes
- For the chlorinated compounds, the sub-slab to indoor air ratios range from 144 to 0.004
- For PCE, the ratio for subsurface to indoor air is greater than 1 for about 72% of the homes.
- Ratios of 10 and higher were observed for 1,4-dichlorobenzene, chloroform, and PCE.

These results indicate that for some compounds concentrations in the sub-slab are higher than in the homes, setting up a positive concentration gradient from the subsurface to indoor air. Of course, these results exclude homes without VMPs, and are impacted by factors such as variable detection limits in the sub-slab and indoor air samples. To evaluate the evidence for vapor intrusion and/or risk posed by these concentrations, an individualized home-by home analysis is required.

Section 10

Conclusions

The following conclusions summarize the key points discussed in previous sections of this report:

- Shallow groundwater samples collected from 14 locations yielded detections of PCE and MTBE; MTBE was detected in more than half of the samples at concentrations consistent with previous studies
- A soil sample collected at the water table in the alley between Oglethorpe Street and Eastern Ave. is consistent with the presence of residual liquid-phase gasoline; this result provides additional evidence for migration of liquid-phase gasoline to the District of Columbia side of Eastern Ave
- Analyses of the air and vapor samples indicates that the population of volatile compounds detected via TO-15 analyses are similar amongst the 4 data populations.
 - In the 39 ambient air sample population, a total of 38 analytes were detected at least once
 - In the 128 indoor air sample population, a total of 47 analytes were detected at least once
 - In the 378 VMP vapor samples, a total of 64 analytes were detected at least once
 - In the 151 GMP vapor samples, a total of 48 analytes were detected at least once
- Ambient air concentrations of benzene, toluene, and PCE are within ranges observed both at Washington DC's McMillan Reservoir, and within ranges reported in the literature for other urban environments
- Many compounds detected in the TO-15 analyses are likely unrelated to subsurface contamination sources. These include
 - freons
 - various solvents and alcohols
 - anomalous concentrations of acetone, MIBK, tetrahydrofuran, propene, and carbon disulfide in GMP samples
- For the suite of 13 petroleum-related compounds that occur frequently in the vapor sample populations, the following observations can be made
 - the concentration values for each compound range over several orders of magnitude
 - the maximum values and 75th percentile values for indoor air samples generally exceed those from the ambient air samples
 - the maximum values and maximum 75th percentile values are generally associated with the GMP data
 - the minimum detections are generally associated with sub-slab VMP samples
 - With the exception of MTBE, all compounds were detected in the indoor air of each of the six geographic zones in the Riggs Park neighborhood.

- All compounds were detected in at least one location in the subsurface vapor of each of the six geographic zones in the Riggs Park neighborhood
- The maximum benzene concentration detected in indoor air was $8.36 \text{ ug} / \text{m}^3$
- The maximum benzene concentration detected in subsurface vapors was $24.9 \text{ ug} / \text{m}^3$.
- For the 6 selected chlorinated compounds that occur frequently in the vapor sample populations the following observations can be made:
 - the concentration values for each compound range over several orders of magnitude
 - all the compounds were detected in each of the four sample groups (indoor air, ambient air, VMPs, and GMPs)
 - For PCE, the maximum concentrations and 75th percentile concentrations are similar in both the VMP and GMP sample populations; these exceed the maximum and 75th percentile values for indoor air and ambient air
 - All compounds were detected in indoor air in at least one location in each of the six geographic zones in the Riggs Park neighborhood
 - All compounds were detected in subsurface vapors in at least one location in each of the six geographic zones in the Riggs Park neighborhood
 - The maximum concentration of PCE detected in indoor air was $42.3 \text{ ug} / \text{m}^3$
 - The maximum concentration of PCE detected in subsurface vapors was $929 \text{ ug} / \text{m}^3$.
- For homes at which compounds were detected both indoors and in the sub-slab samples:
 - for the petroleum-related and chlorinated compounds, the ratios of sub-slab to indoor air concentrations range from 182 to 0.003 for individual homes
 - for each of the petroleum-related compounds, the sub-slab concentrations exceed the indoor air concentrations in at least 20% of homes
 - for the chlorinated compounds chloroform, 111-TCA, 14-dichlorobenzene and PCE, the maximum sub-slab concentration exceed the indoor air concentration in at least 20% of the homes
 - the concentration of PCE is greater in the sub-slab than in the indoor air in about 72% of the homes

Discussion and Recommendations

The information presented above provides an overview of the analytical results from this sampling program. As noted, the intent of this report was not to exclude any analytes from the analysis. Nonetheless, some compounds that are widespread in the atmosphere (e.g. the freons) are not central to the potential impact of groundwater contamination on the Riggs Park neighborhood. Other compounds, such as the alcohols, propene, and carbon disulfide, may reflect some aspect of subsurface contamination and/or its metabolism by microbes. Because of

the potential of these compounds to originate from many potential sources, however, any linkage between them and existing groundwater contamination must be explored further.

Similarly, no attempt was made in this report to subtract or otherwise account for ambient air concentrations of the compounds of interest. The limited comparisons cited in this report between these data and other urban air studies suggest that the ambient air concentrations of volatile organic compounds are similar to those observed in other U.S. urban areas.

Finally, no attempt was made in this report to determine the levels at which contaminants present in indoor air that appear to be present in subsurface vapor pose unacceptable cancer or non-cancer risk.

The following recommendations are based upon the above analyses:

- These data should be used to complete a risk-assessment for the Riggs Park neighborhood on a home-by-home basis, using all relevant compounds in order to establish what risk, if any, exists for the residents
- Considering the results from subsurface sampling southwest of Nicholson street (beyond the presumed groundwater discharge zone), additional sampling may be helpful
- Should results suggesting subsurface contamination southwest of Nicholson Street be confirmed, the current conceptual model of contaminant transport should be reviewed to determine if
 - The Nicholson street storm sewer is an effective discharge point for all groundwater contamination and/or if
 - Other potential sources of subsurface contamination exist southwest of Nicholson street.

Section 11

References

- Aleksic, N., G. Boynton, G. Sistla, and J. Perry. 2005. Concentrations and Trends of Benzene in Ambient Air Over New York State during 1990-2003: *Atmospheric Environment* 39, no. 40: 7894-7905.
- Batterman, S., G. Hatzivasilis, and C. Jia. 2006. Concentrations and Emissions of Gasoline and Other Vapors from Residential Vehicle Garages: *Atmospheric Environment* 40, no. 10: 1828-1844.
- Boyer, J.E. 2004. Background Indoor Air Contamination: Its Assessment as Part of a Vapor Intrusion Investigation: Proceedings of the Air & Waste Management Association's 97th Annual Conference and Exhibition; Sustainable Development: Gearing Up for the Challenge, June 22-25 2004, Indianapolis, Indiana: 5753-5763.
- Building Sciences and Engineering Associates (BSEA) Ltd. 2006. Riggs Park Air Quality Study - Final Program Report: Prepared for Government of the District of Columbia. September.
- California Air Resources Board. 1992. Indoor Pollutant Concentrations and Exposures.
- District of Columbia Department of Health. 2007. Indoor Air Sampling Results, Winter, 2007.
- Dodson, R.E., J.I. Levy, J.D. Spengler, J.P. Shine, and D.H. Bennett. 2008. Influence of Basements, Garages, and Common Hallways on Indoor Residential Volatile Organic Compound Concentrations: *Atmospheric Environment* 42, no. 7: 1569-1581.
- Gannett Fleming Inc. 2003a. Description of Current Conditions Report, Volume I: Prepared for Chevron Products Company. July.
- Gannett Fleming Inc. 2003b. Soil Vapor Monitoring Report. August.
- Gannett Fleming Inc. 2004. Interim Measures Report for Field Sampling at Residences. October.
- Gannett Fleming Inc. 2005. Interim Measures Work Plan for Indoor Air Sampling at Residences: Prepared for ChevronTexaco Products Company. March.
- Gannett Fleming Inc. 2006. Site Investigation Report, former Chevron Facility 122208, 5801 Riggs Road, Chillum, Maryland: Prepared for Chevron Products Company. June 21.
- Gannett Fleming Inc. 2007a. Groundwater Monitoring Data in Electronic Format (122208_analytical_11-26-07.xls). Data Provided to DOH from Gannett Fleming via e-mail.
- Gannett Fleming Inc. 2007b. Interim Measure Report for Indoor Air Sampling [REDACTED], Former Chevron Facility 122208, Chillum, Maryland.
- Gannett Fleming Inc. 2008. Groundwater Monitoring Data in Electronic Format (122208_GW_Data_12-08-08.xls). Data Provided to DDOE and DOH.

- Hers, I., R. Zapf-Gilje, L. Li, and J. Atwater. 2001. The Use of Indoor Air Measurements to Evaluate Intrusion of Subsurface VOC's into Buildings: *Journal of the Air and Waste Management Association* 51, no. 9: 1318-1331.
- Ivahnenko, T., and J.S. Zogorski. 2006. Sources and Occurrence of Chloroform and Other Trihalomethanes in Drinking-Water Supply Wells in the United States, 1986-2001. U.S. Geological Survey. Scientific Investigations Report 2006-5015.
- Jia, C., S. Batterman, and C. Godwin. 2008a. VOCs in Industrial, Urban and Suburban Neighborhoods, Part 1: Indoor and Outdoor Concentrations, Variation, and Risk Drivers: *Atmospheric Environment* 42, no. 9: 2083-2100.
- Jia, C., S. Batterman, and C. Godwin. 2008b. VOCs in Industrial, Urban and Suburban Neighborhoods-Part 2: Factors Affecting Indoor and Outdoor Concentrations: *Atmospheric Environment* 42, no. 9: 2101-2116.
- McDonald, G.J., and W.E. Wertz. 2007. PCE, TCE, and TCA Vapors in Subslab Soil Gas and Indoor Air: A Case Study in Upstate New York: *Ground Water Monitoring & Remediation* 27, no. 4: 86-92.
- Pankow, J.F., et al. 2003. Concentrations and Co-Occurrence Correlations of 88 Volatile Organic Compounds (VOCs) in the Ambient Air of 13 Semi-Rural to Urban Locations in the United States: *Atmospheric Environment* 37, no. 36: 5023-5046.
- Sack, T.M., D.H. Steele, K. Hammerstrom, and J. Remmers. 1992. Survey of Household Products for Volatile Organic Compounds: *Atmospheric Environment* 26A, no. 6: 1063-1070.
- S.S. Papadopoulos & Associates. 2007. Work Plan for the Riggs Park Air Toxics, Vapor Port Installation, Indoor, Soil Vapor Intrusion Study and Corrective Action Plan, December.
- Tichenor, B.A., L.E. Sparks, M.D. Jackson, Z. Guo, M.A. Mason, C.M. Plunket, and S.A. Rasor. 1990. Emissions of Perchloroethylene from Dry Cleaned Fabrics: *Atmospheric Environment* 24A, no. 5: 1219-1229.
- U.S. Army Corps of Engineers. 2004a. Chillum: Benzene Deep Plume, Maximum May-June Data from Deep Wells.
- U.S. Army Corps of Engineers. 2004b. Chillum: Benzene Shallow Plume, May-June 2004 Data from Shallow Wells.
- U.S. Army Corps of Engineers. 2004c. Chillum: Depth to Groundwater, August 204 Data from Shallow Wells.
- U.S. Army Corps of Engineers. 2004d. Chillum: MTBE Deep Plume, Maximum May-June Data from Deep Wells.
- U.S. Army Corps of Engineers. 2004e. Chillum: MTBE Shallow Plume, May-June 2004 Data from Shallow Wells.
- U.S. Army Corps of Engineers. 2004f. Chillum: Benzene Soil Vapor Sample Results in 2002 and 2004. Shallow Soil Within 5 Feet Above or Below Slab.

- U.S. Army Corps of Engineers. 2004g. Chillum: MTBE Soil Vapor Sample Results in 2002 and 2004. Shallow Soil Within 5 Feet Above or Below Slab.
- U.S. Army Corps of Engineers. 2004h. Chillum: Groundwater Elevation Contour, Shallow Wells - August 2004 Data.
- U.S. Army Corps of Engineers. 2005a. Chillum: Benzene Deep Plume, Maximum September 2005 Data from Deep Wells.
- U.S. Army Corps of Engineers. 2005b. Chillum: MTBE Deep Plume, Maximum September 2005 Data from Deep Wells.
- U.S. Army Corps of Engineers. 2006a. Chillum: Benzene Shallow Plume, September 2005 Data from Shallow Wells.
- U.S. Army Corps of Engineers. 2006b. Chillum: MTBE Shallow Plume, September 2005 Data from Shallow Wells.
- U.S. Army Corps of Engineers. 2008. Plume Maps, Chillum, Maryland.
- U.S. Department of Health and Human Services. 2008. Health Consultation - Public Comment Release, Indoor and Outdoor Air Data Evaluation for Chillum Perc Site, Chillum, Prince Georges County, Maryland. April 9.
- U.S. Environmental Protection Agency. 1992. Supplemental Guidance to RAGS: Calculating the Concentration Term. U.S. Environmental Protection Agency. May.
- U.S. Environmental Protection Agency. 1996. National Air Toxics Assessment, 1996 Modeled Ambient Concentrations. Accessed March 23, 2008, 2008. Available from U.S. Environmental Protection Agency,.
- U.S. Environmental Protection Agency/USACE. 2002a. Perc Groundwater Results, Deep - Chevron Spring 2002 DP Sampling Round. Perc Groundwater Analytical Results Samples Collected During Gasoline Investigation Spring 2002.
- U.S. Environmental Protection Agency/USACE. 2002b. Perc Groundwater Results, Shallow - Chevron Spring 2002 DP Sampling Round. Perc Groundwater Analytical Results Samples Collected During Gasoline Investigation Spring 2002.
- U.S. Environmental Protection Agency. 2002c. OSWER Draft Guidance for Evaluating the Vapor Intrusion in Indoor Air Pathway from Groundwater and Soils (Subsurface Vapor Intrusion Guidance). Report No. EPA530-D-02-004. November.
- U.S. Environmental Protection Agency. 2002d. Calculating Upper Confidence Limits for Exposure Point Concentrations at Hazardous Waste Sites. U.S. Environmental Protection Agency. December.
- U.S. Environmental Protection Agency. 2003a. Chillum PERC Investigation Analytical Data for Samples Collected by EPA/START July-September 2003.

- U.S. Environmental Protection Agency. 2003b. Public Meeting October 2, 2003, Update on EPA's investigation into the presence of PERC in subsurface soils. Mr. Marcos Aquino, On-Scene Coordinator, U.S. Environmental Protection Agency Region III.
- U.S. Environmental Protection Agency. 2004a. Indoor Air Analytical Results (2004) Public Version. TABLE 2 SUMMARY OF VOC DETECTED IN AIR SAMPLES COLLECTED IN APRIL 2004.
- U.S. Environmental Protection Agency/USACE. 2004b. Perc Groundwater Results - Chevron July 2004 Sampling Round. Perc Groundwater Analytical Results Samples Collected During Gasoline Investigation July/.August 2004.
- U.S. Environmental Protection Agency/USACE. 2004c. Perc Groundwater Results - Chevron May 2004 Sampling Round. Perc Groundwater Analytical Results Samples Collected During Gasoline Investigation May/June 2004.U.S.
- U.S. Environmental Protection Agency. 2004d. Soil Vapor Analytical Results (2004) Public Version. TABLE 3 SUMMARY OF SOIL VAPOR ANALYTICAL RESULTS (April 2004).
- U.S. Environmental Protection Agency. 2004e. Soil Vapor Sampling Results, December 2004 Update. PowerPoint Presentation.
- U.S. Environmental Protection Agency. 2004f. Construction and Installation of Permanent Sub-Slab Soil Gas Wells, Standard Operating Procedures 2082, Rev 99.9 (DRAFT), Response Engineering and Analytical Contract. Revision Date March 18, 2004.
- U.S. Environmental Protection Agency. 2004g. Public Meeting Wednesday, Feb. 11, 2004, Update on EPA's investigation into the presence of PERC in subsurface soils. Mr. Marcos Aquino, On-Scene Coordinator, U.S. Environmental Protection Agency Region III.
- U.S. Environmental Protection Agency. 2007. Statement of Basis - Chevron Gasoline Release at Chillum, Maryland. August 30.
- U.S. Environmental Protection Agency. 2008. Final Decision and Response to Comments, Chevron Gasoline Release at Chillum, Maryland – In Two Volumes. April.
- Wallace, L.A. 2001. Human Exposure to Volatile Organic Pollutants: Implications for Indoor Air Studies: Annual Review of Energy and the Environment 26: 269-301.

FIGURES

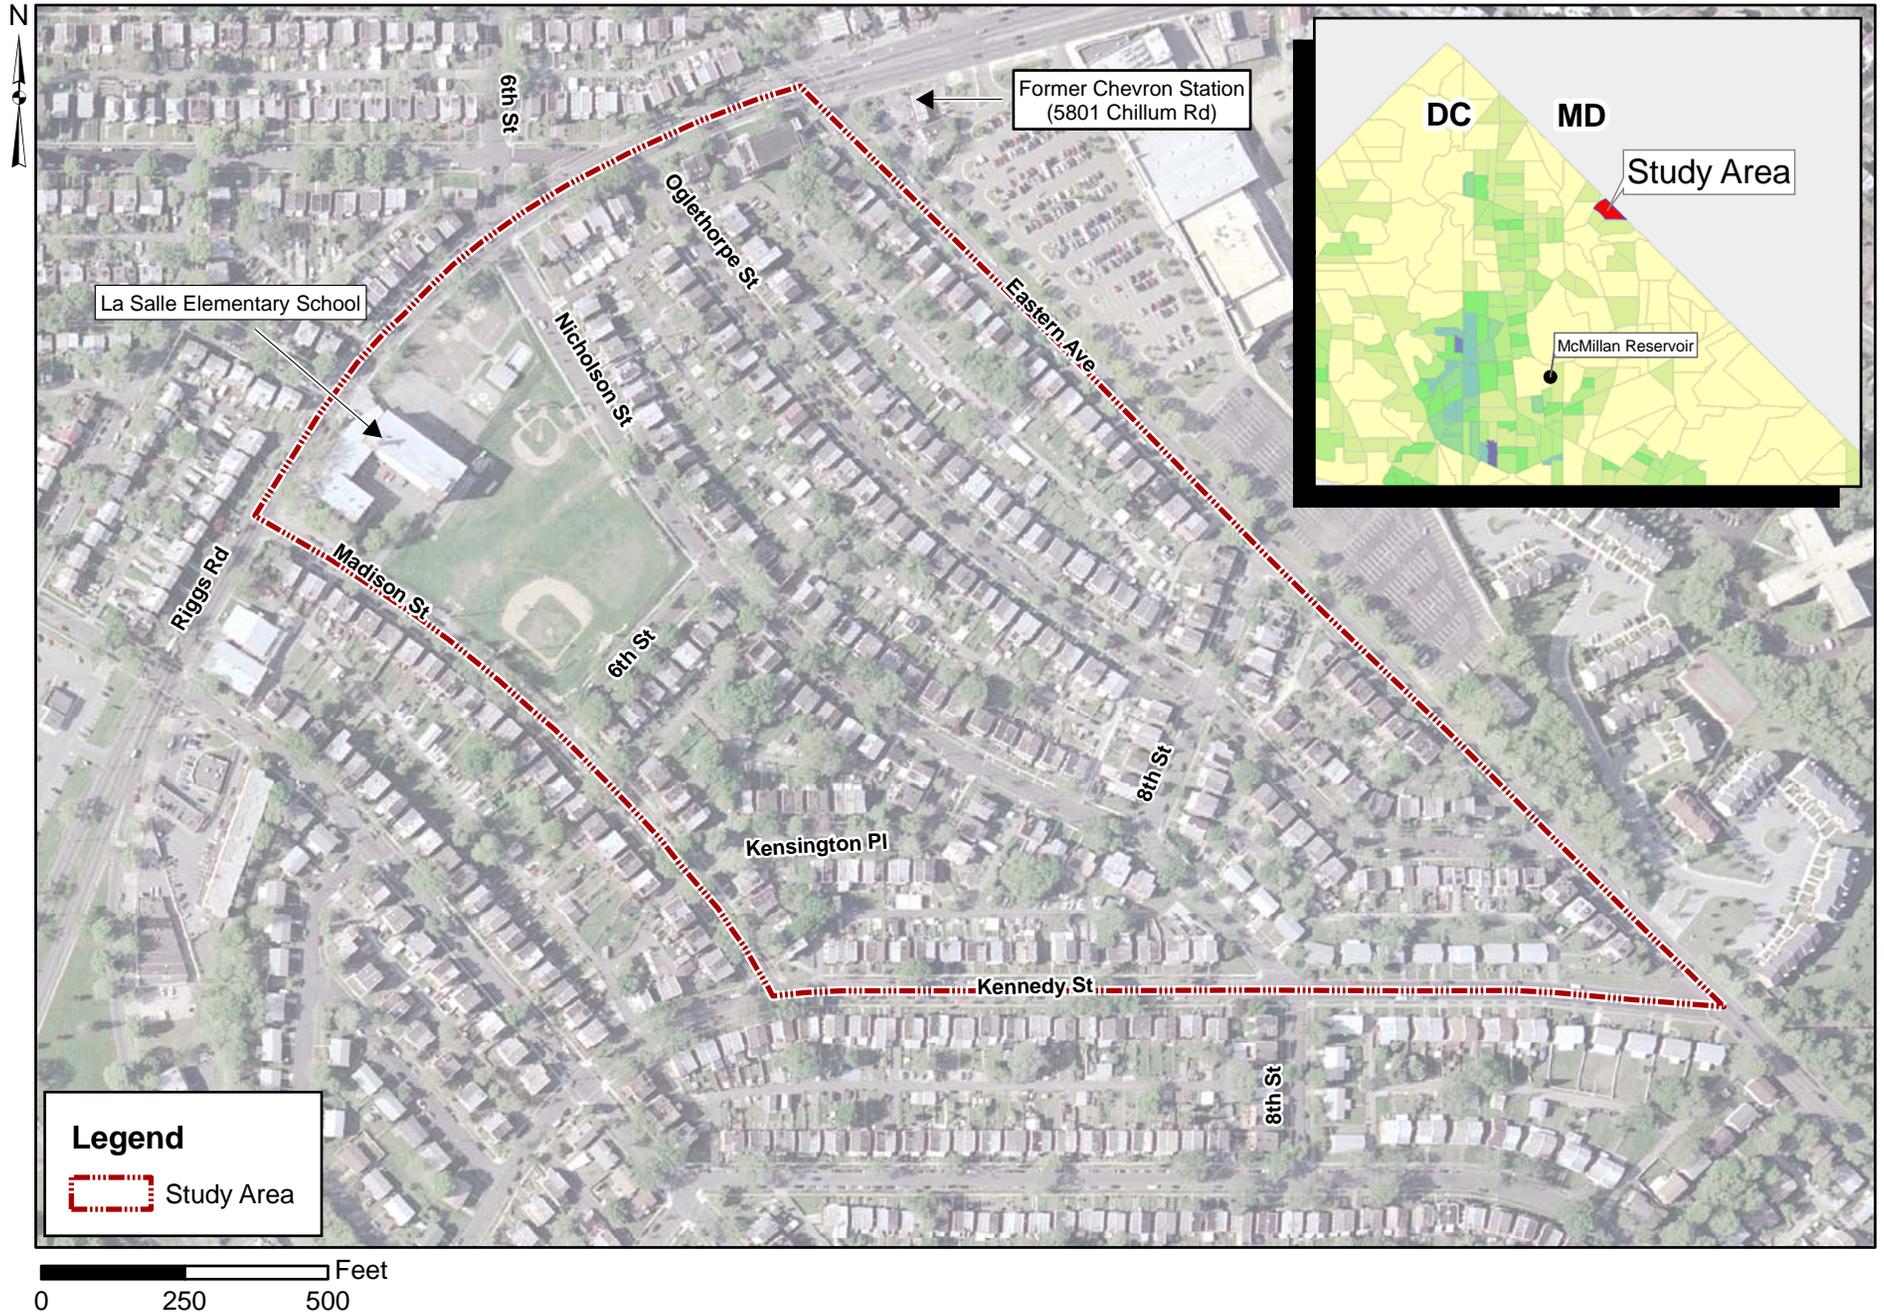


Figure 1 Location of the Riggs Park Community

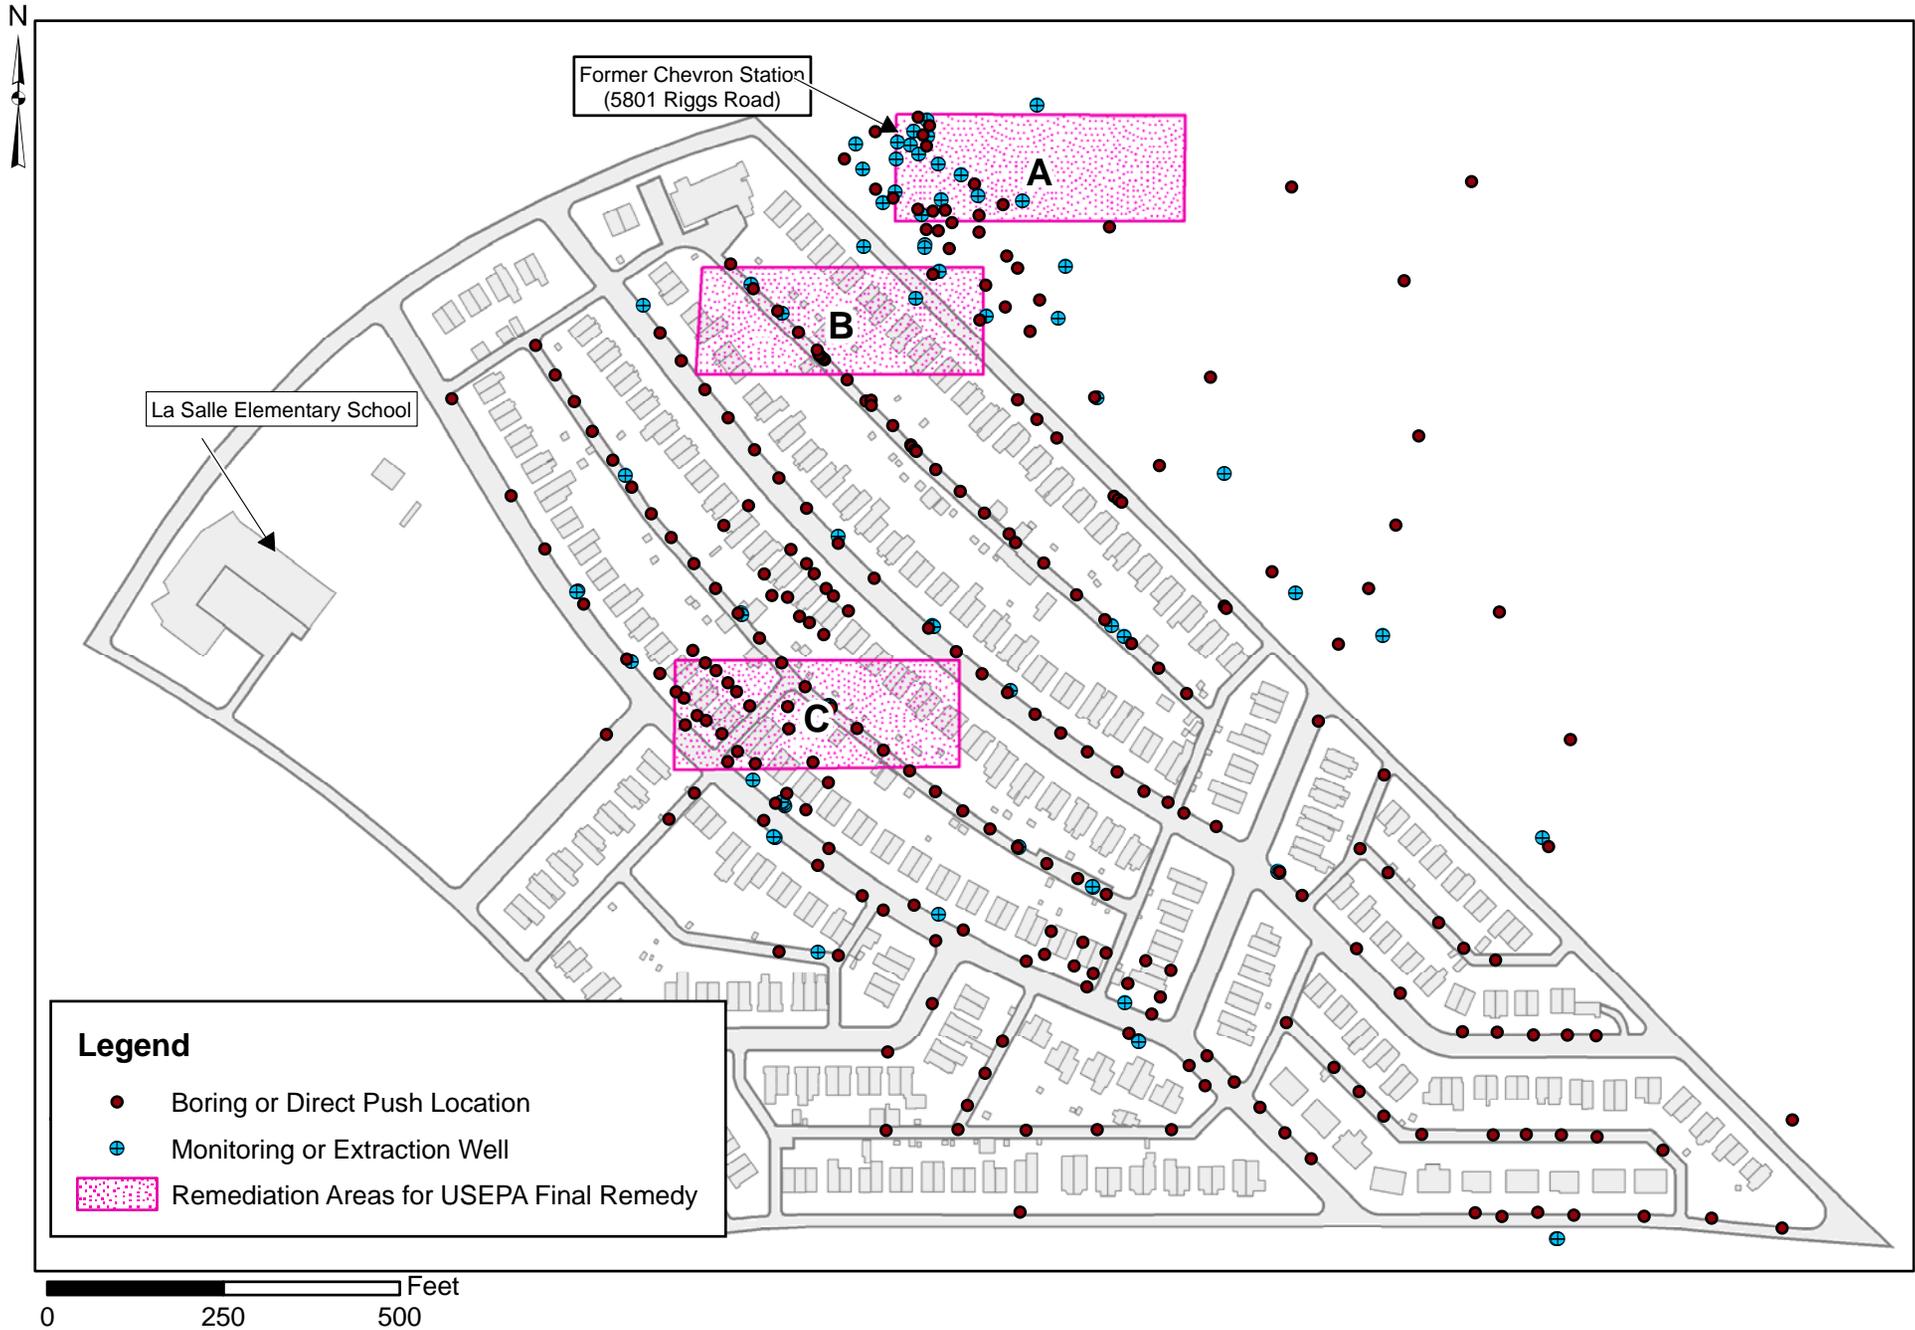


Figure 2 Map showing Locations of Monitoring Wells, Soil Borings, and Soil Vapor Sampling Points from Previous Investigations

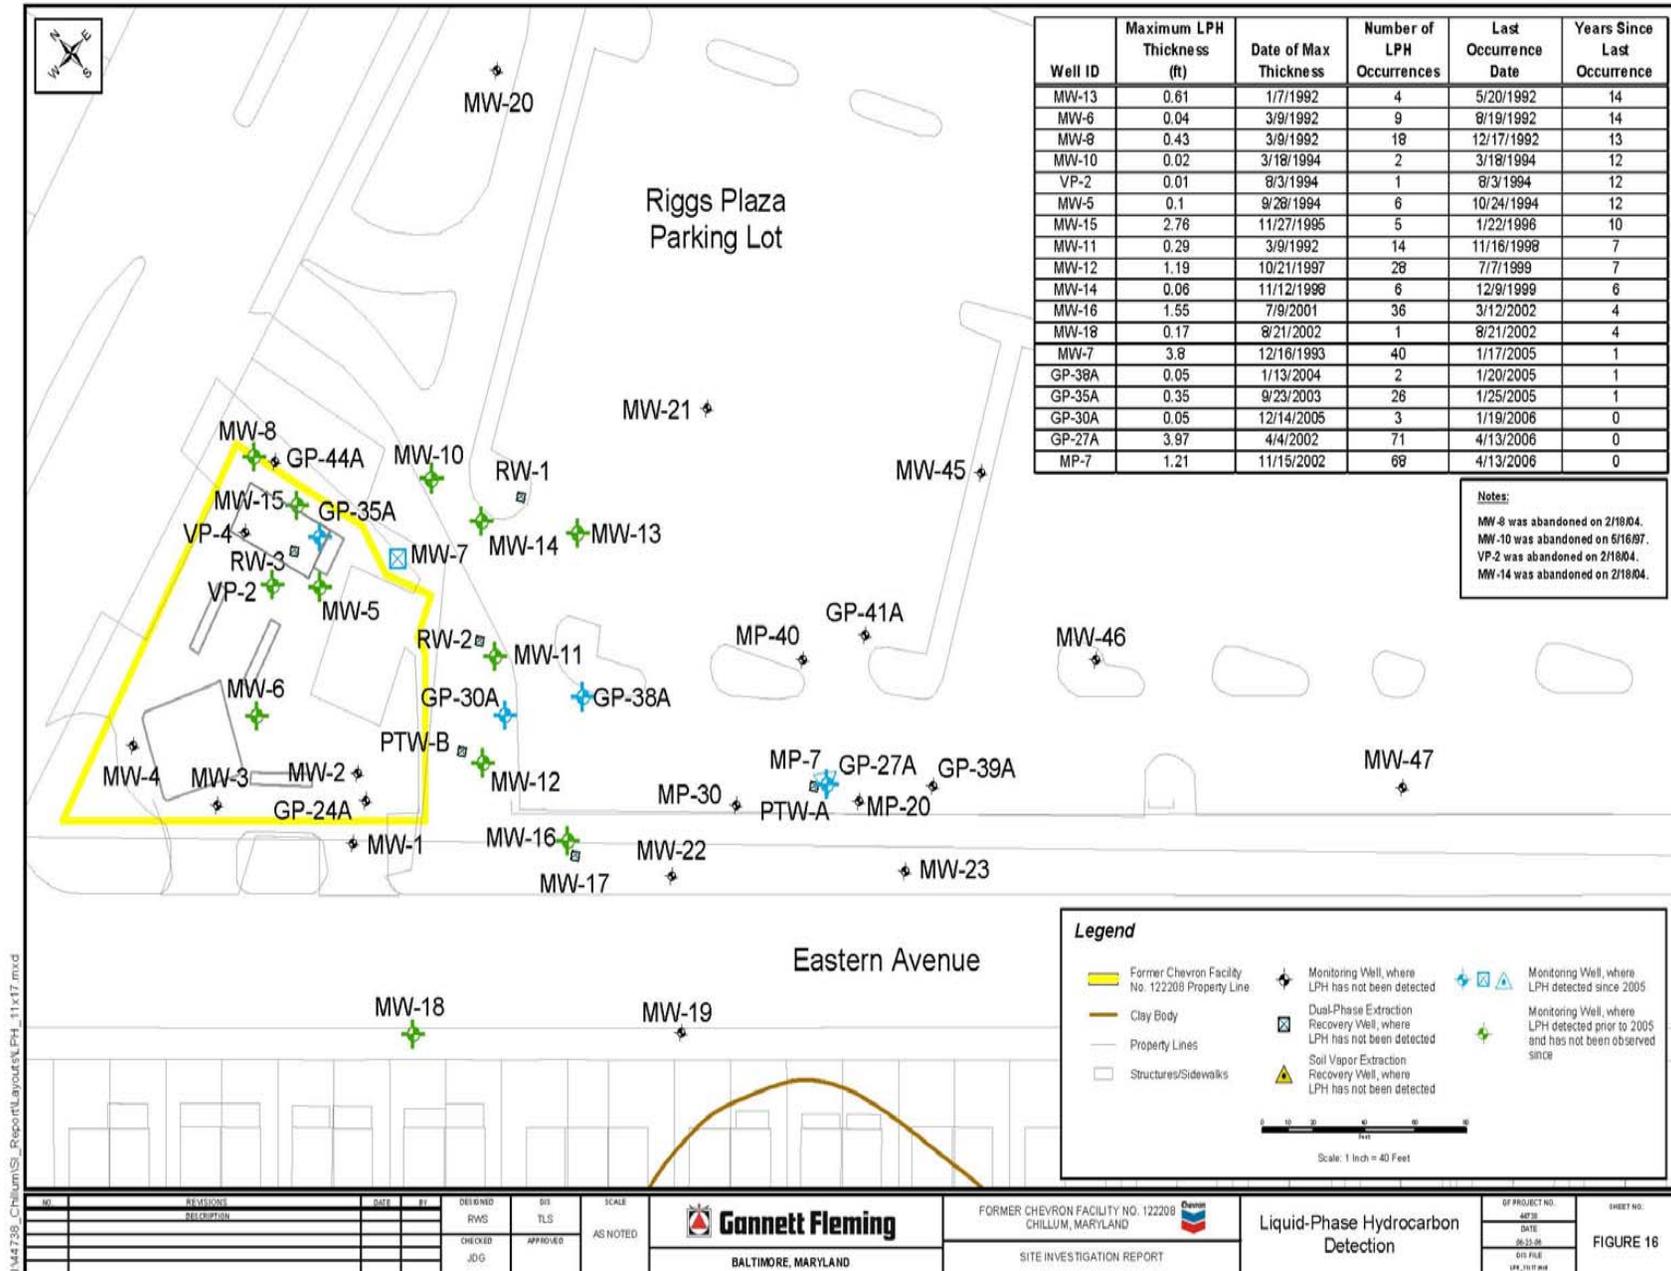


Figure 3 Detections of Liquid-Phase Hydrocarbons (from Gannett-Fleming, 2006)

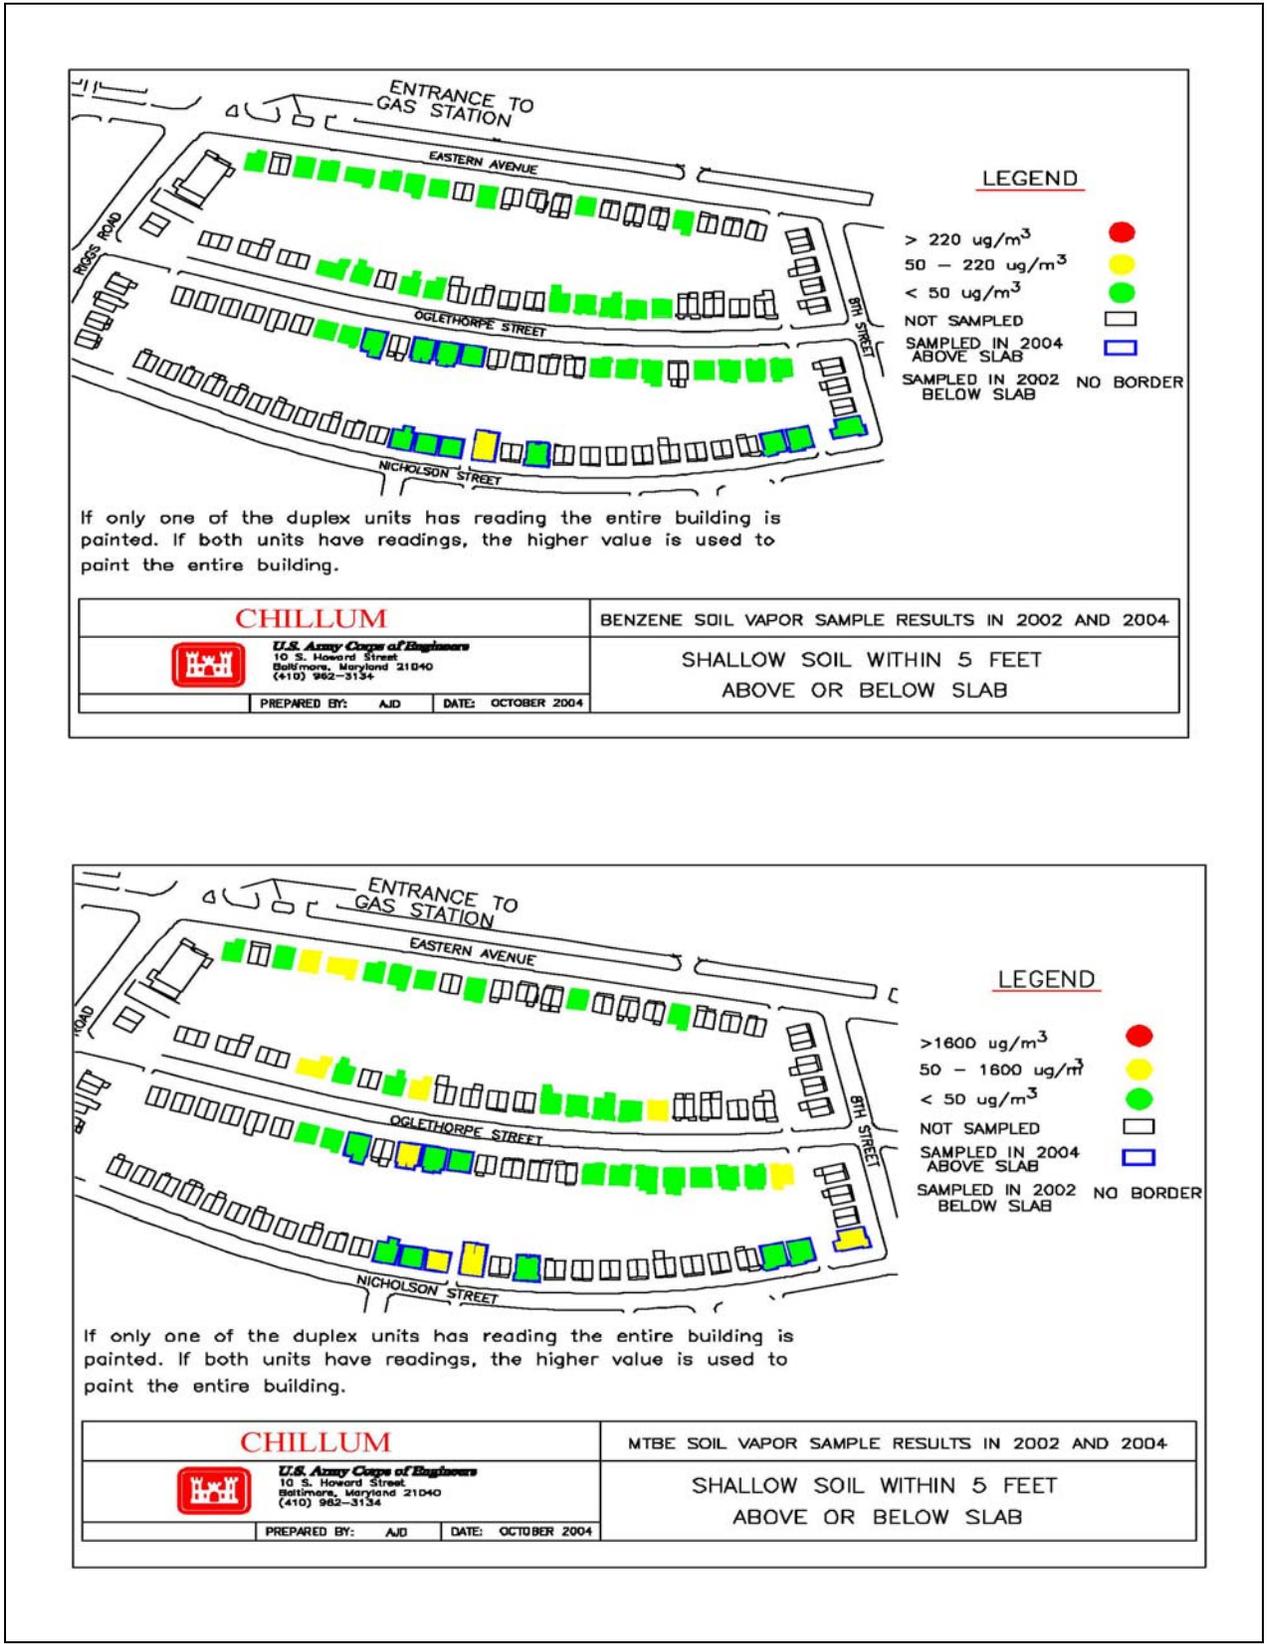


Figure 4 Concentrations of Benzene and MTBE in shallow soil vapor samples in 2002 to 2004 (from USACE, 2004f and 2004g)

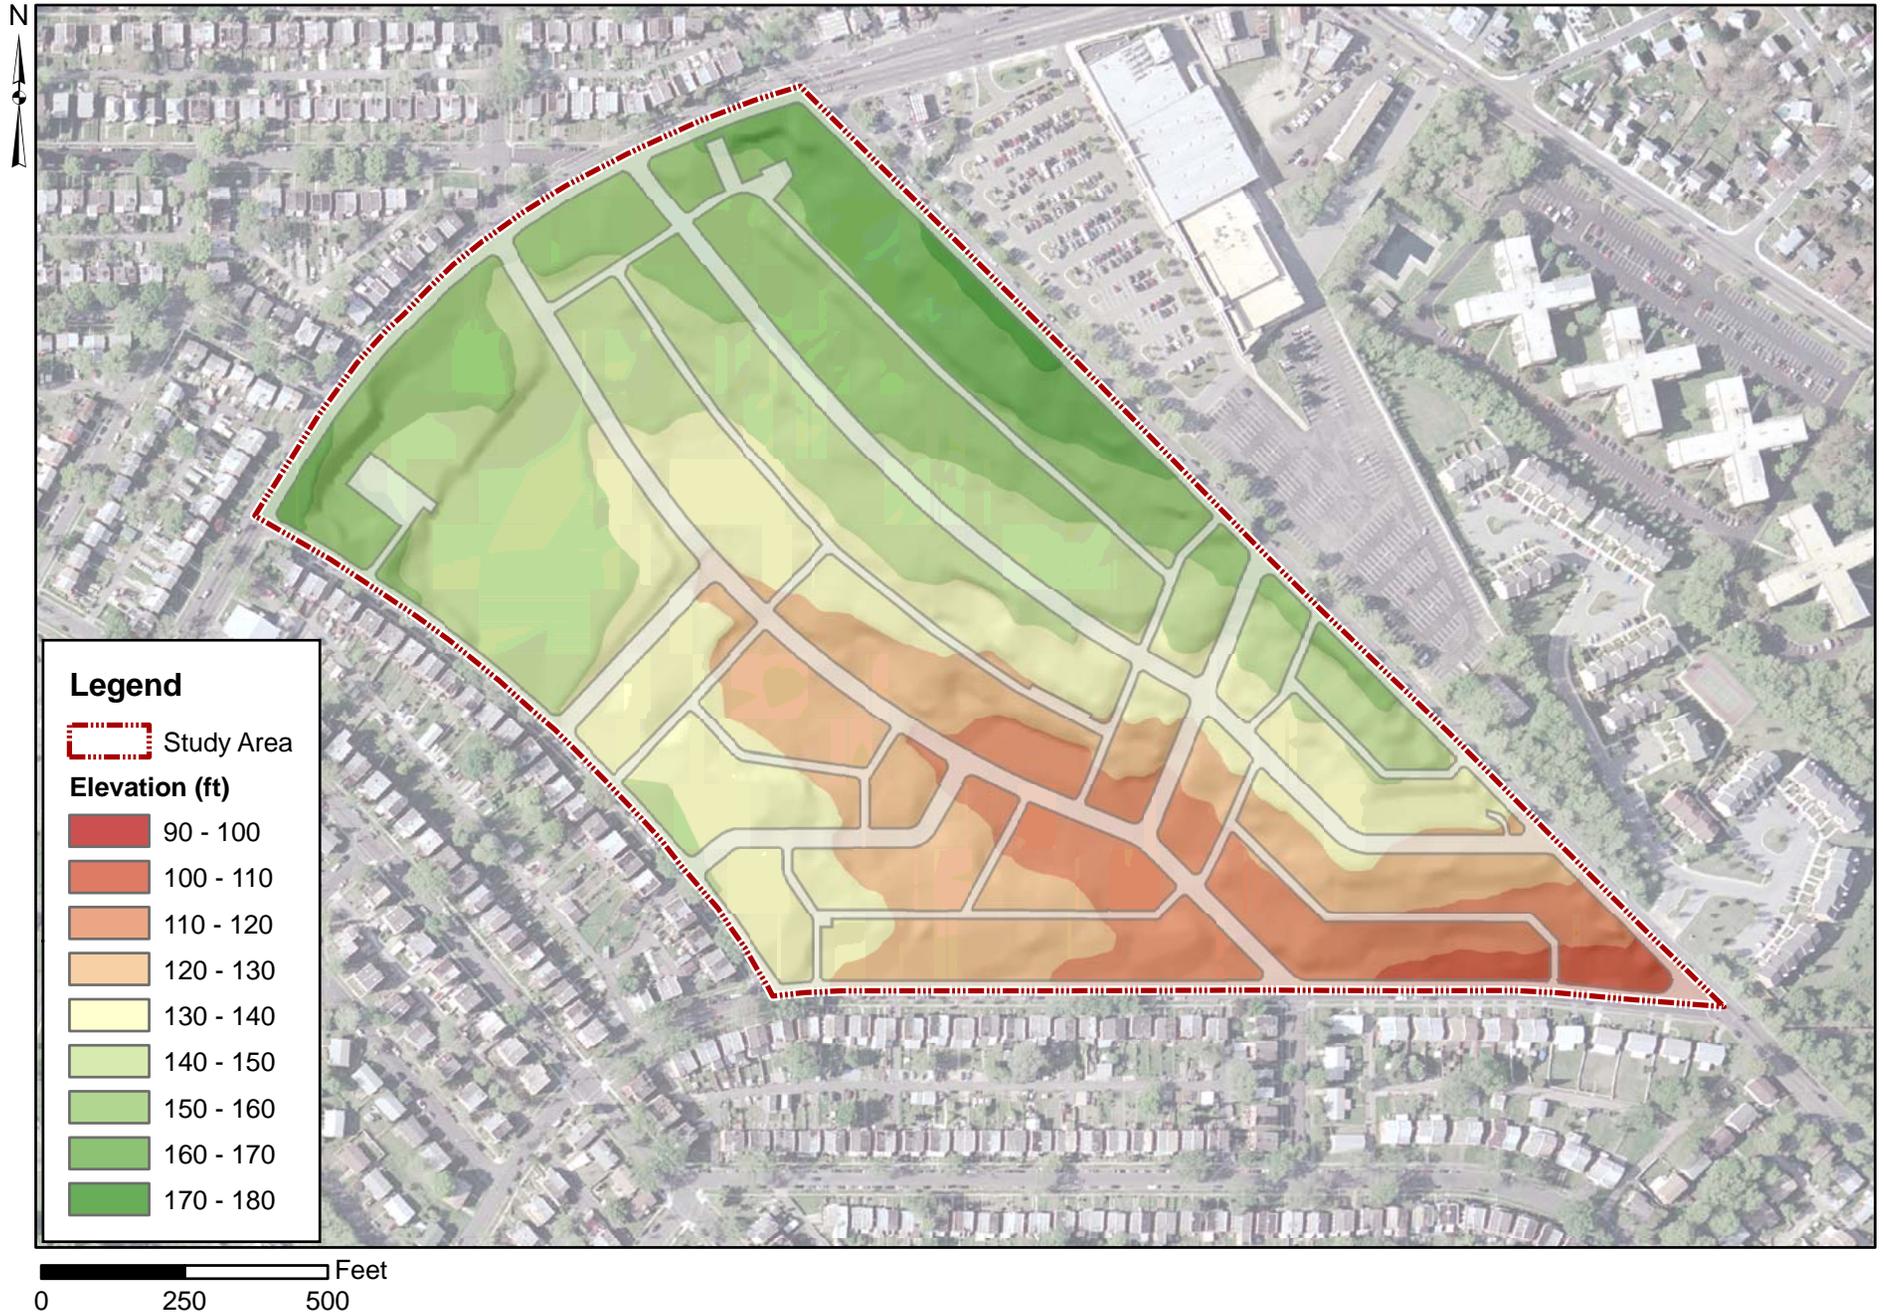


Figure 5 Shaded Relief Topographic Map of the Riggs Park Neighborhood

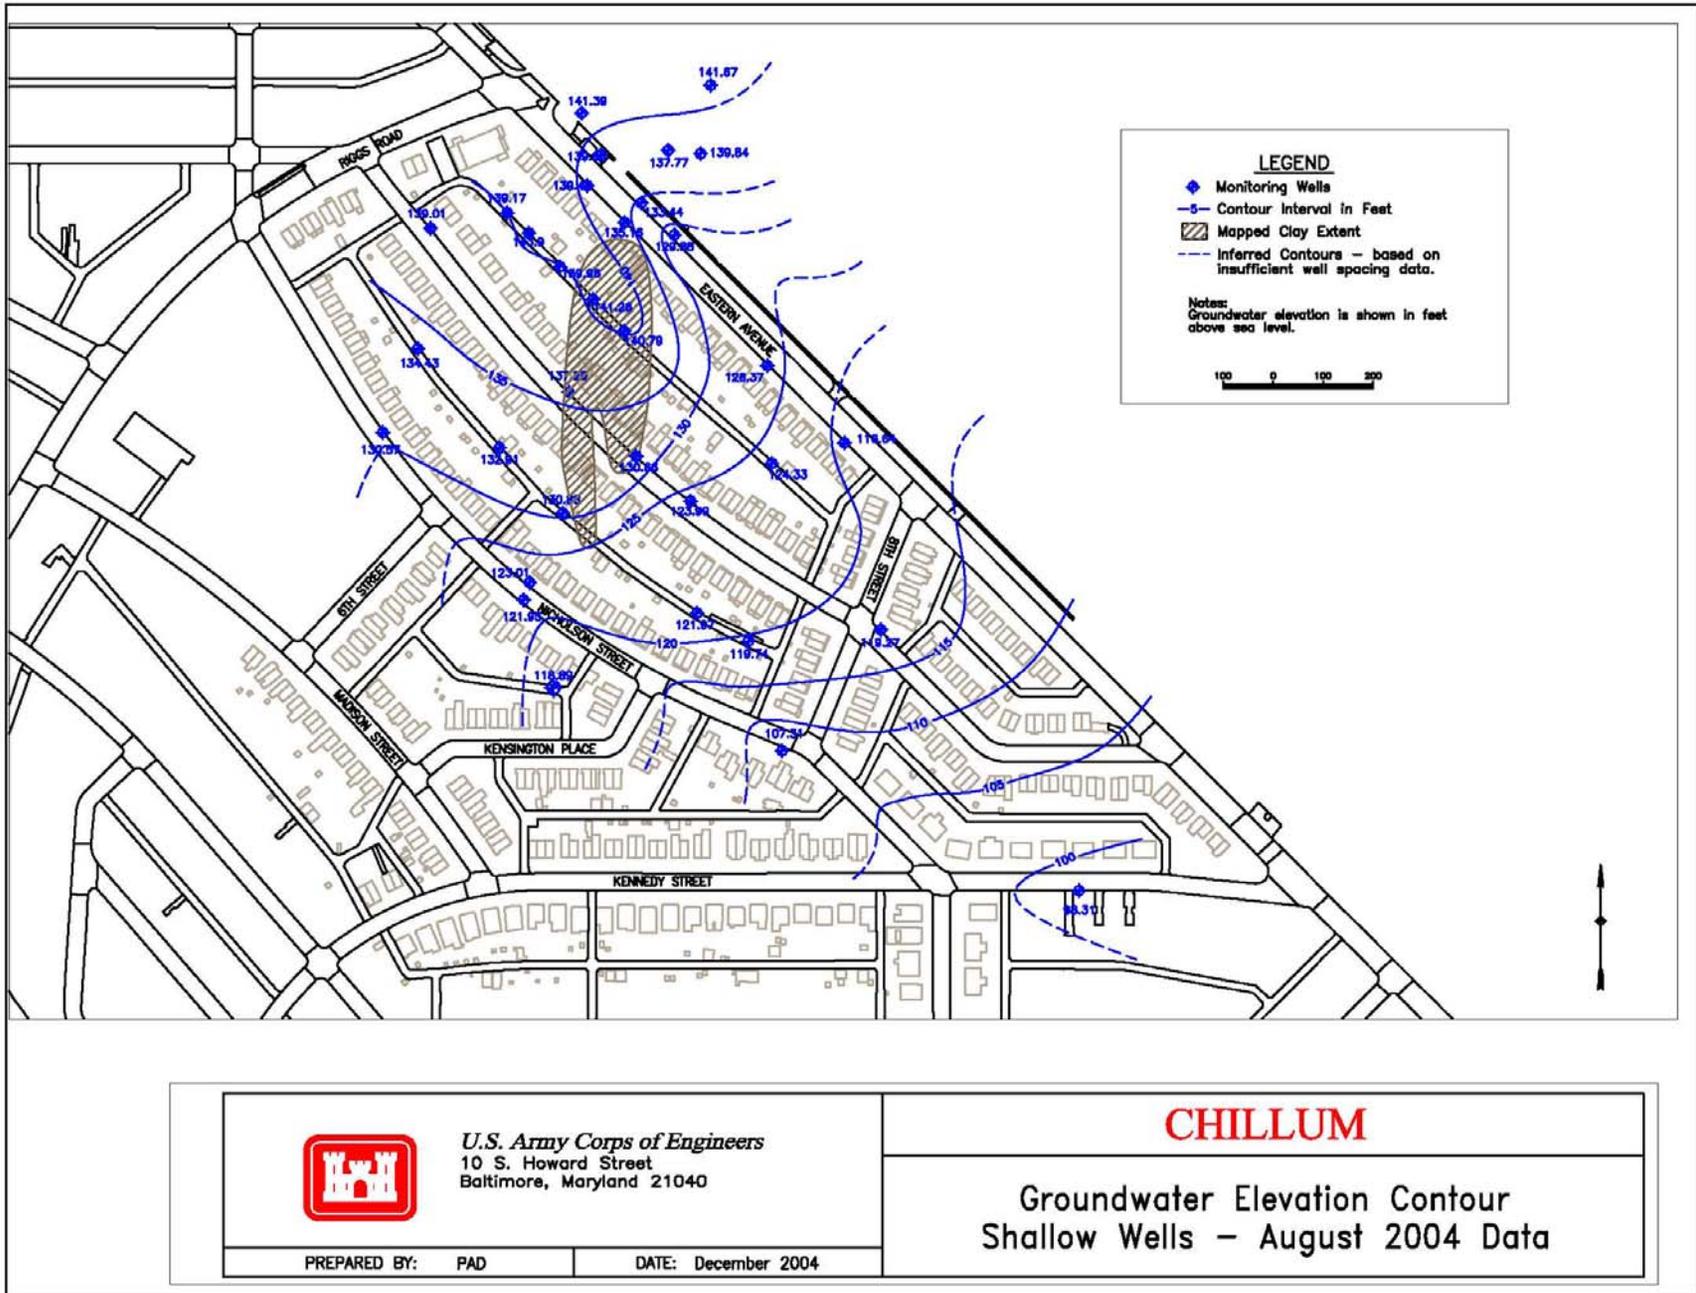


Figure 6 Groundwater Elevations in August 2004 (from USACE, 2004h)

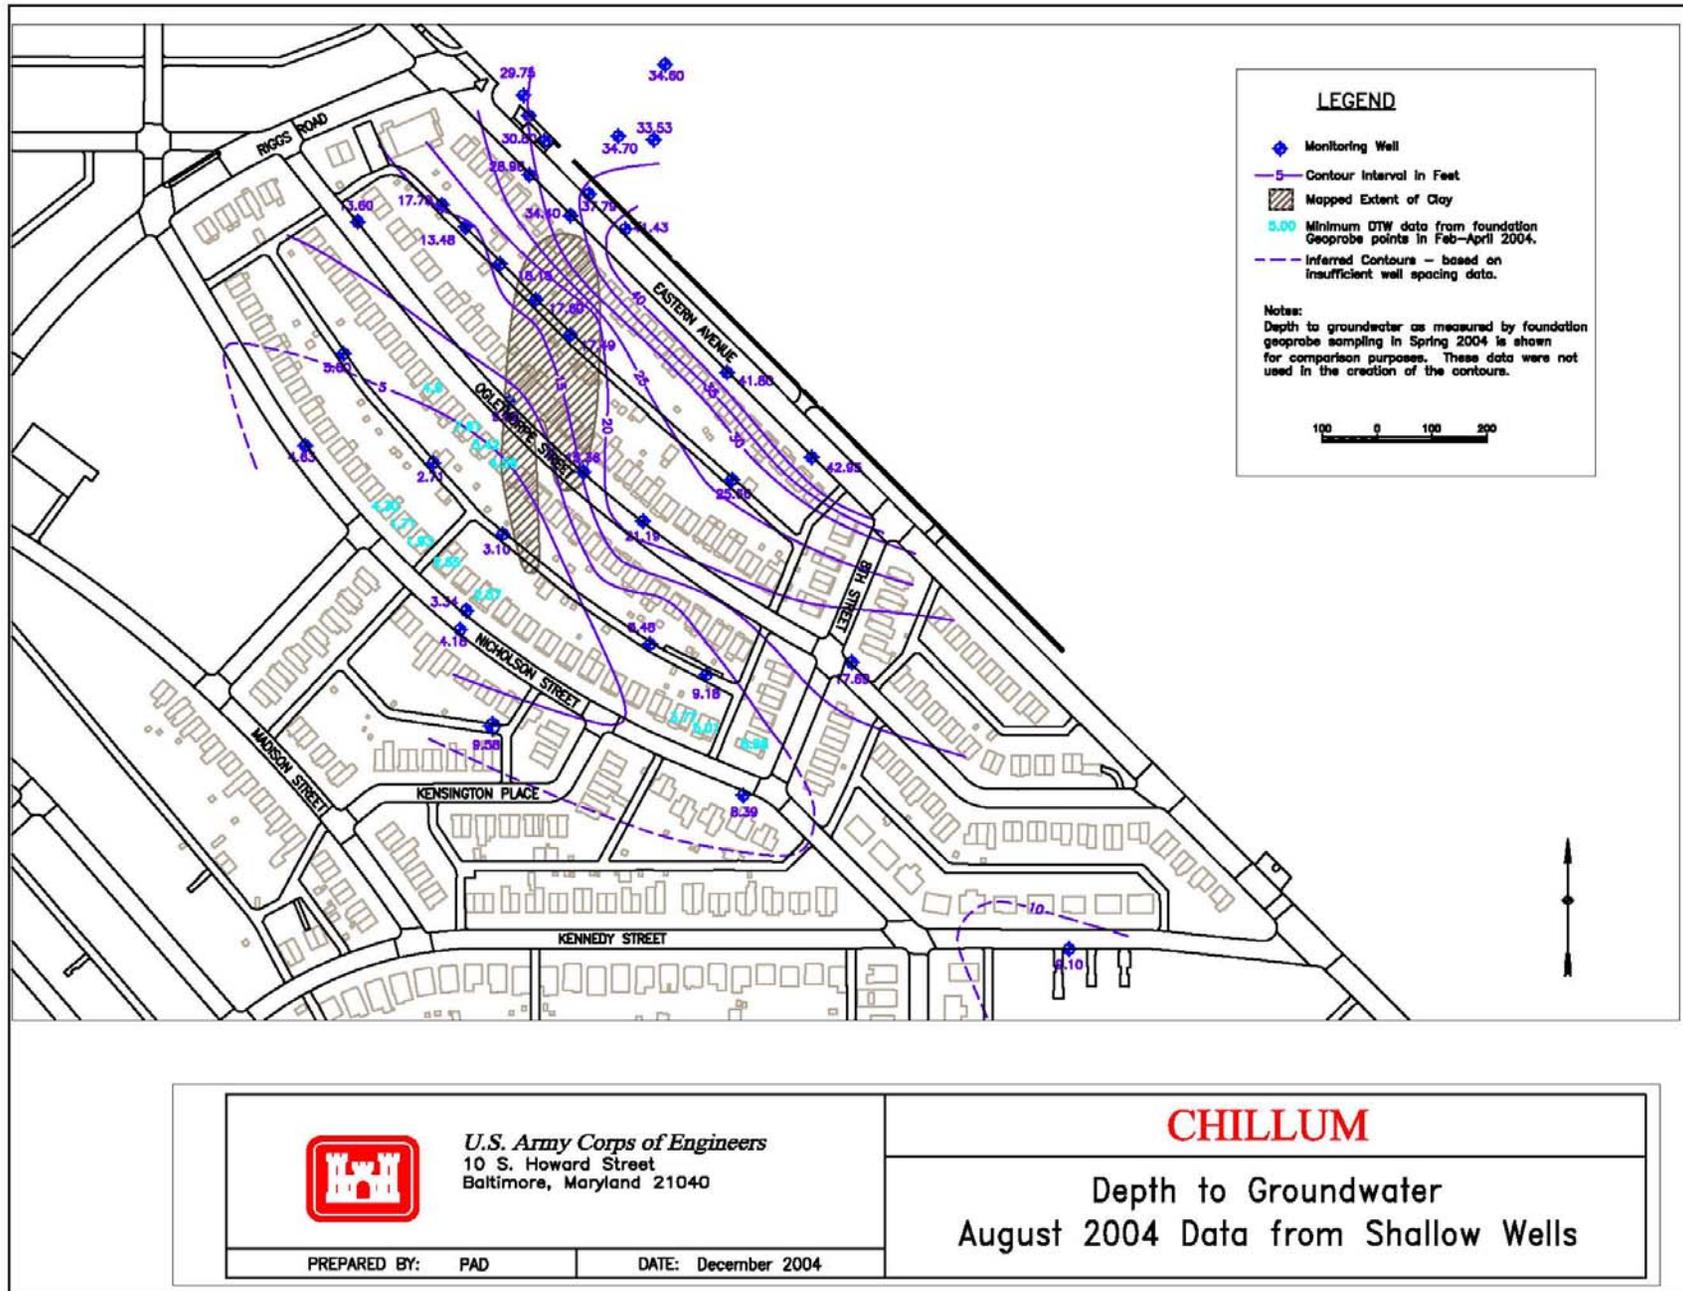


Figure 7 Depth to Groundwater in August 2004 (from USACE, 2004c)


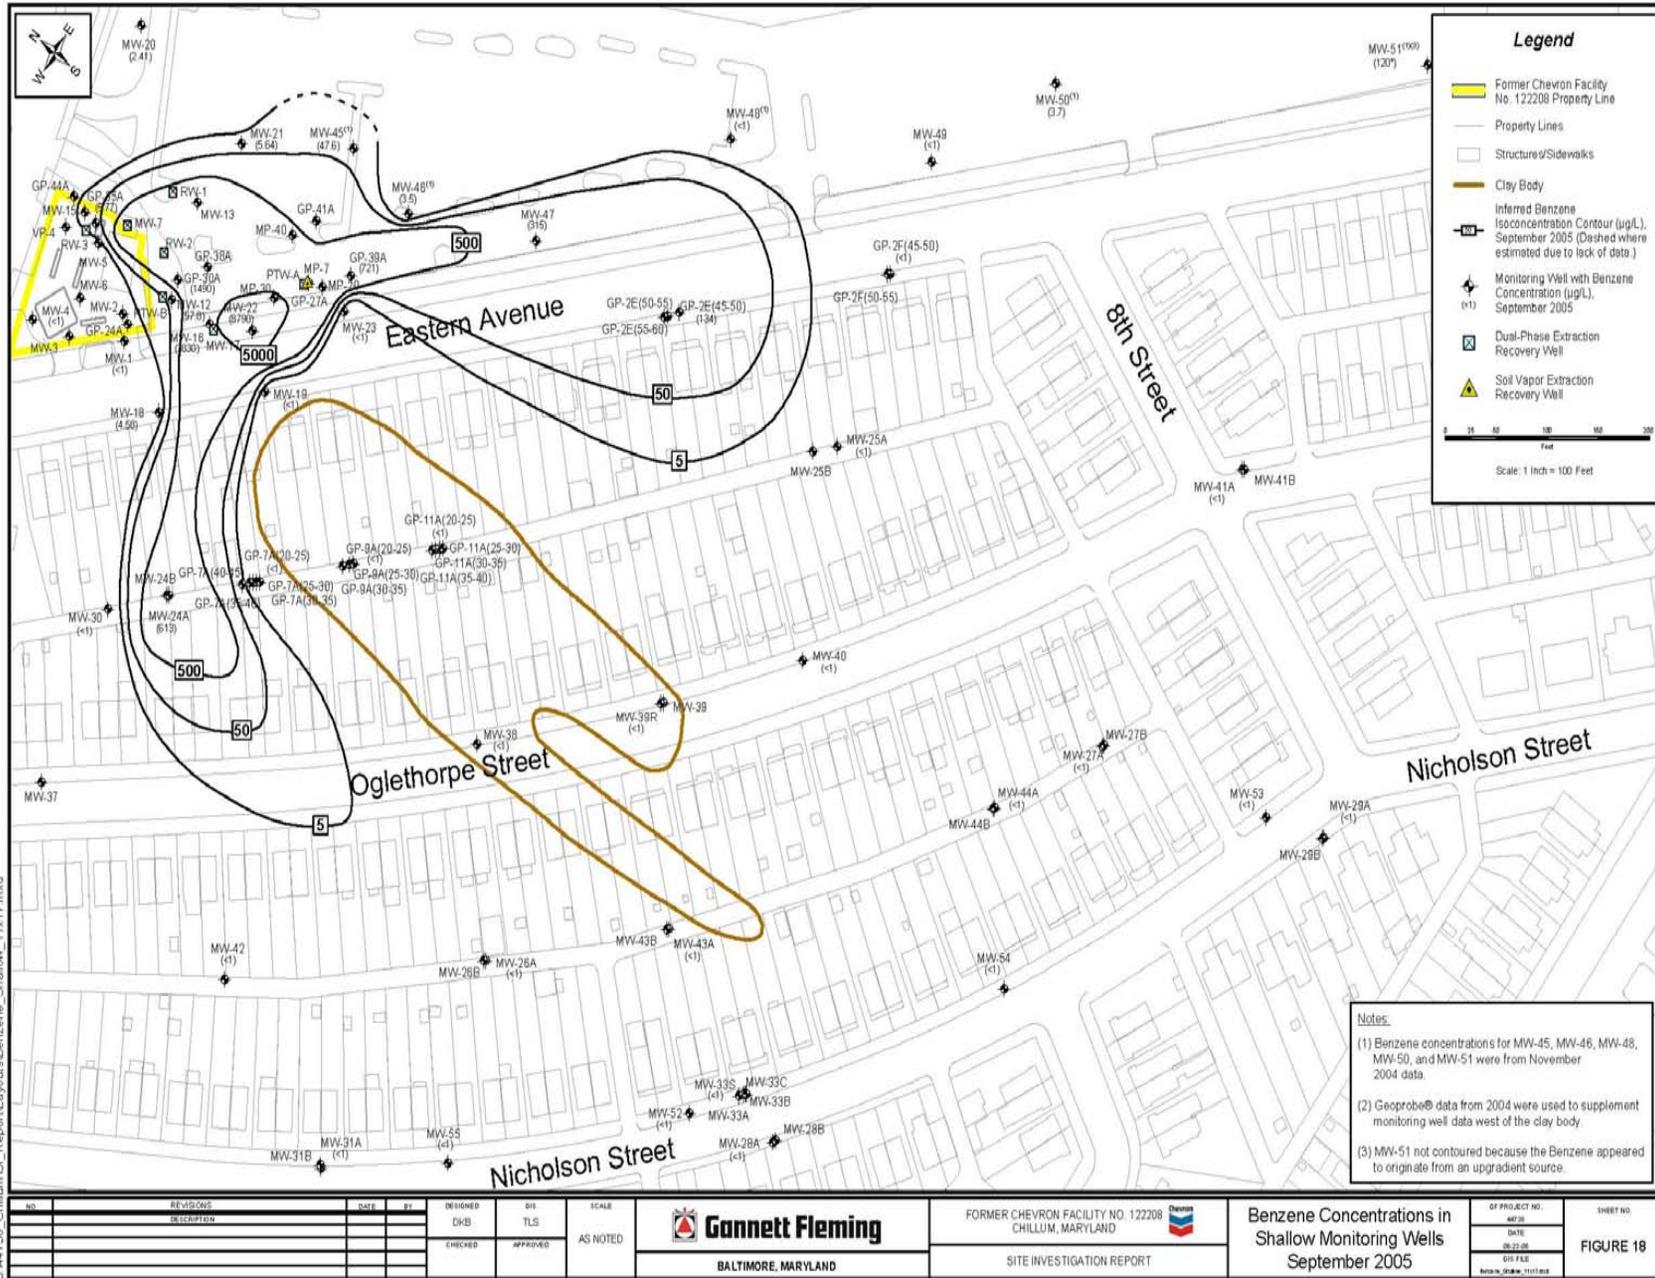


Figure 8 Benzene Concentrations in Shallow Monitoring Wells September 2005 (from Gannett-Fleming, 2006)

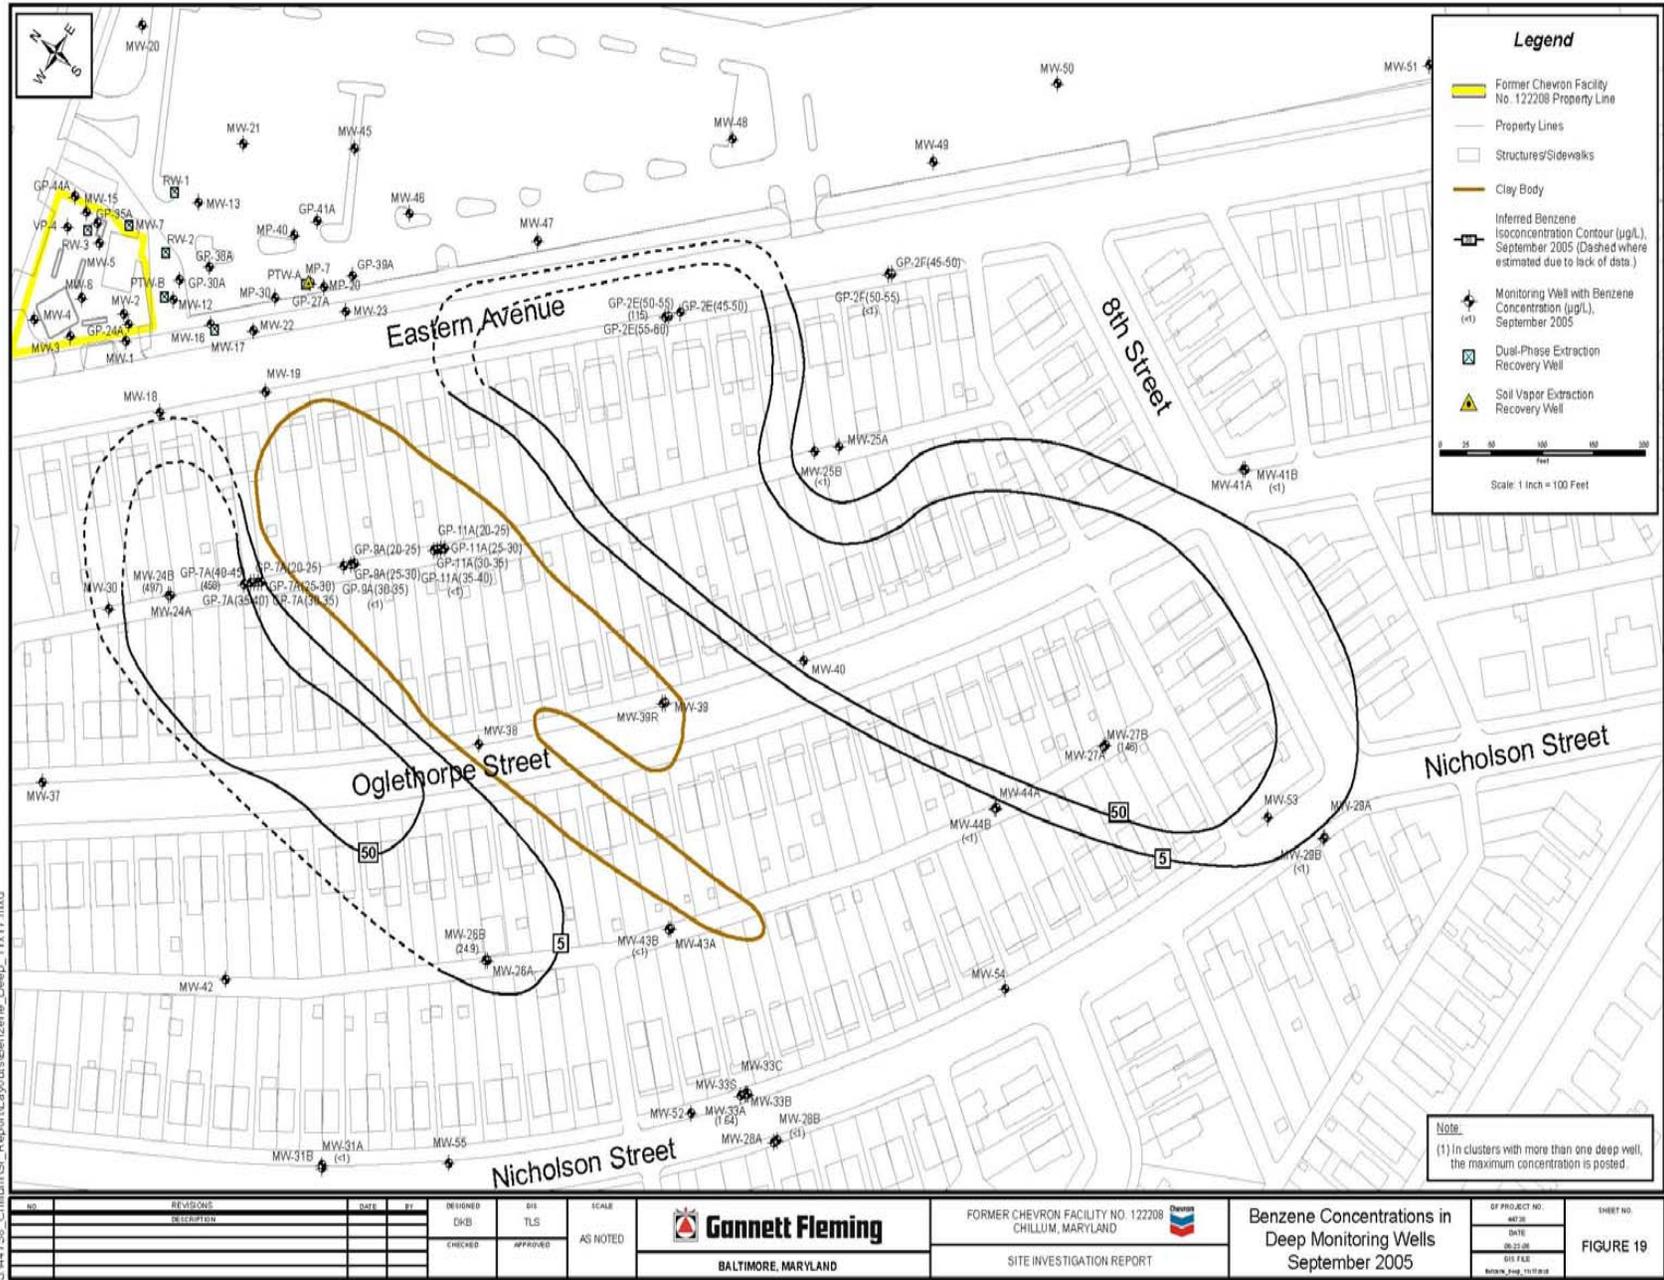

J:\44738 - Chillum\SI - Report\Layouts\Benzene_Deep_11x17.mxd

Figure 9 Benzene Concentrations in Deep Monitoring Wells September 2005 (from Gannett-Fleming, 2006)

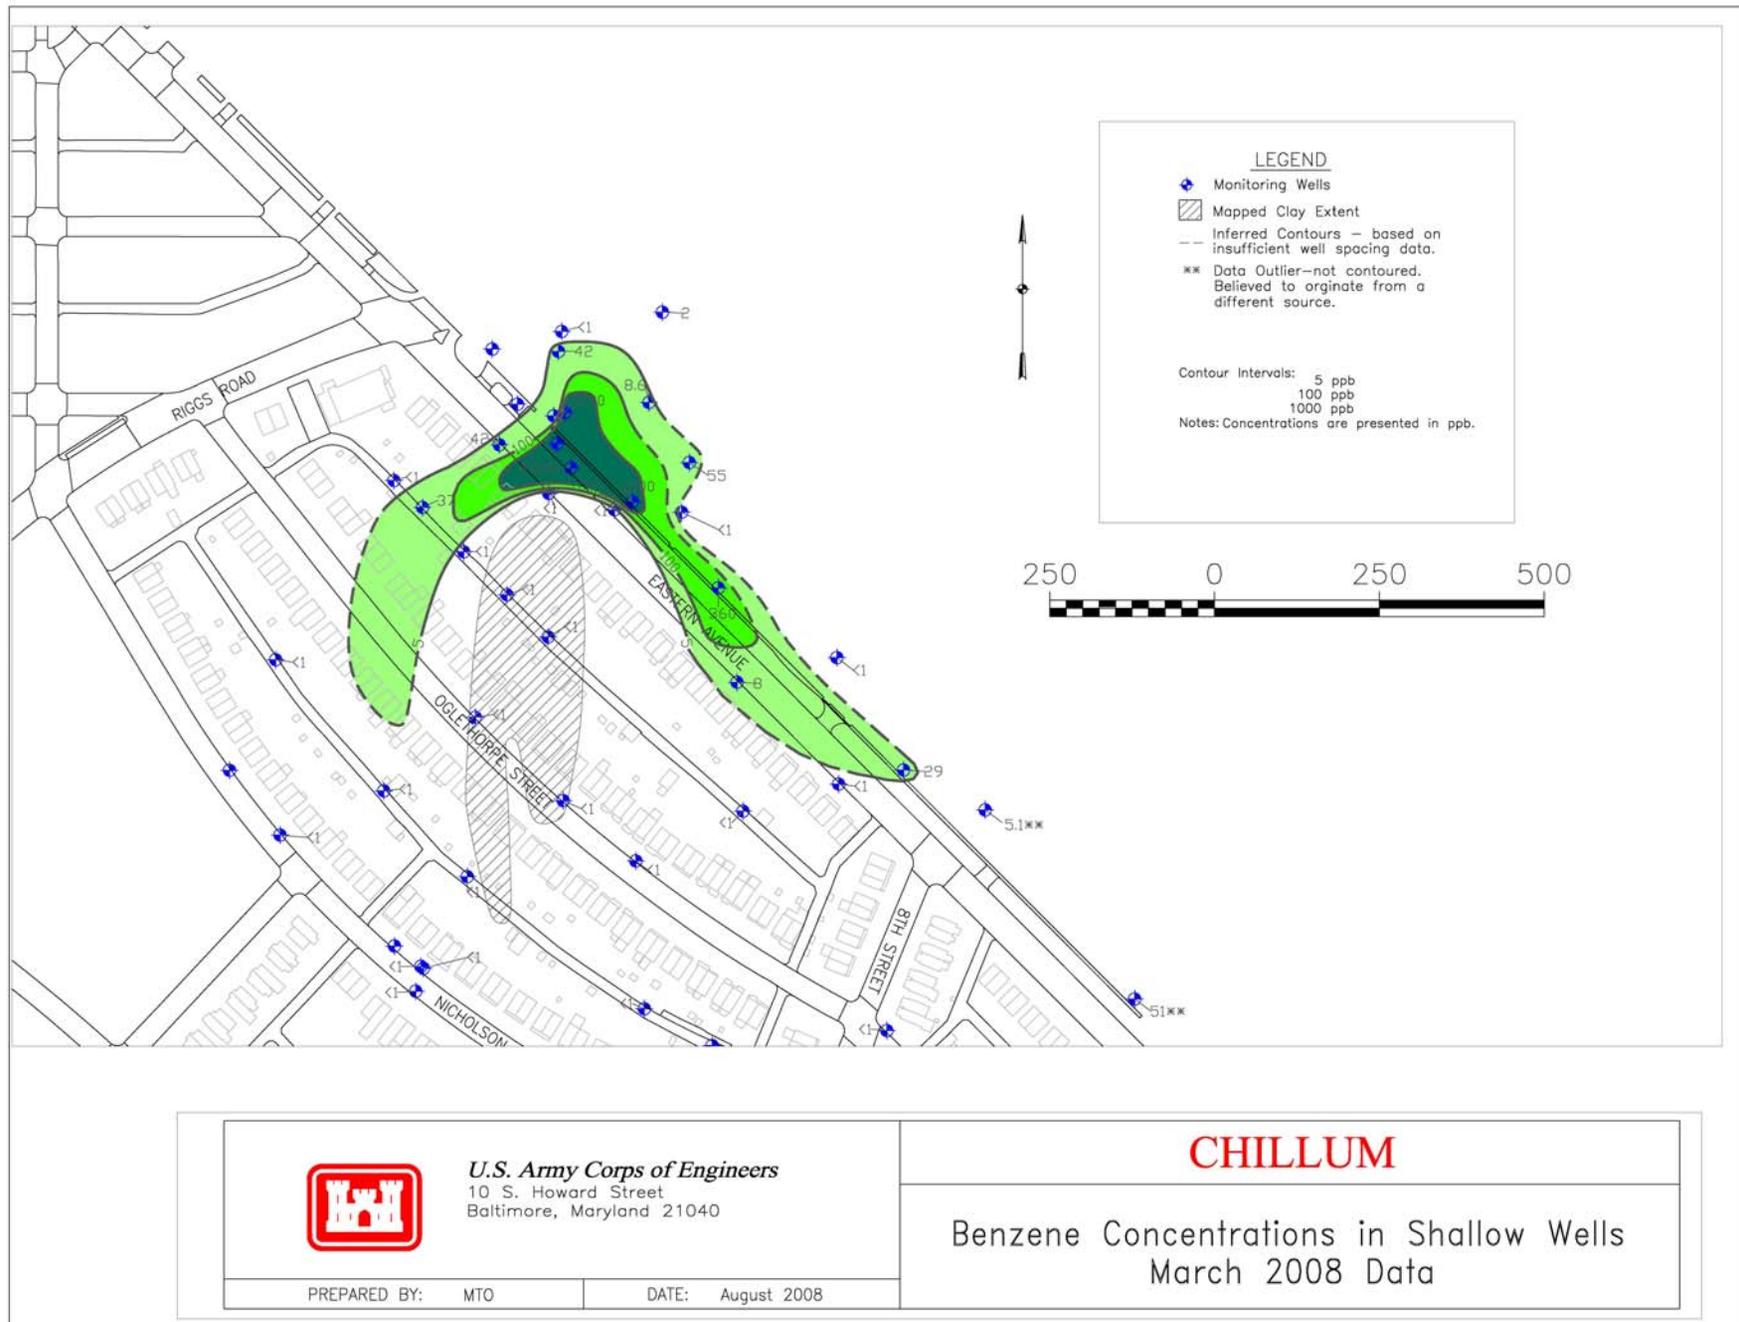


Figure 10 Benzene Concentrations in Shallow Monitoring Wells March 2008 (from USACE, 2008)

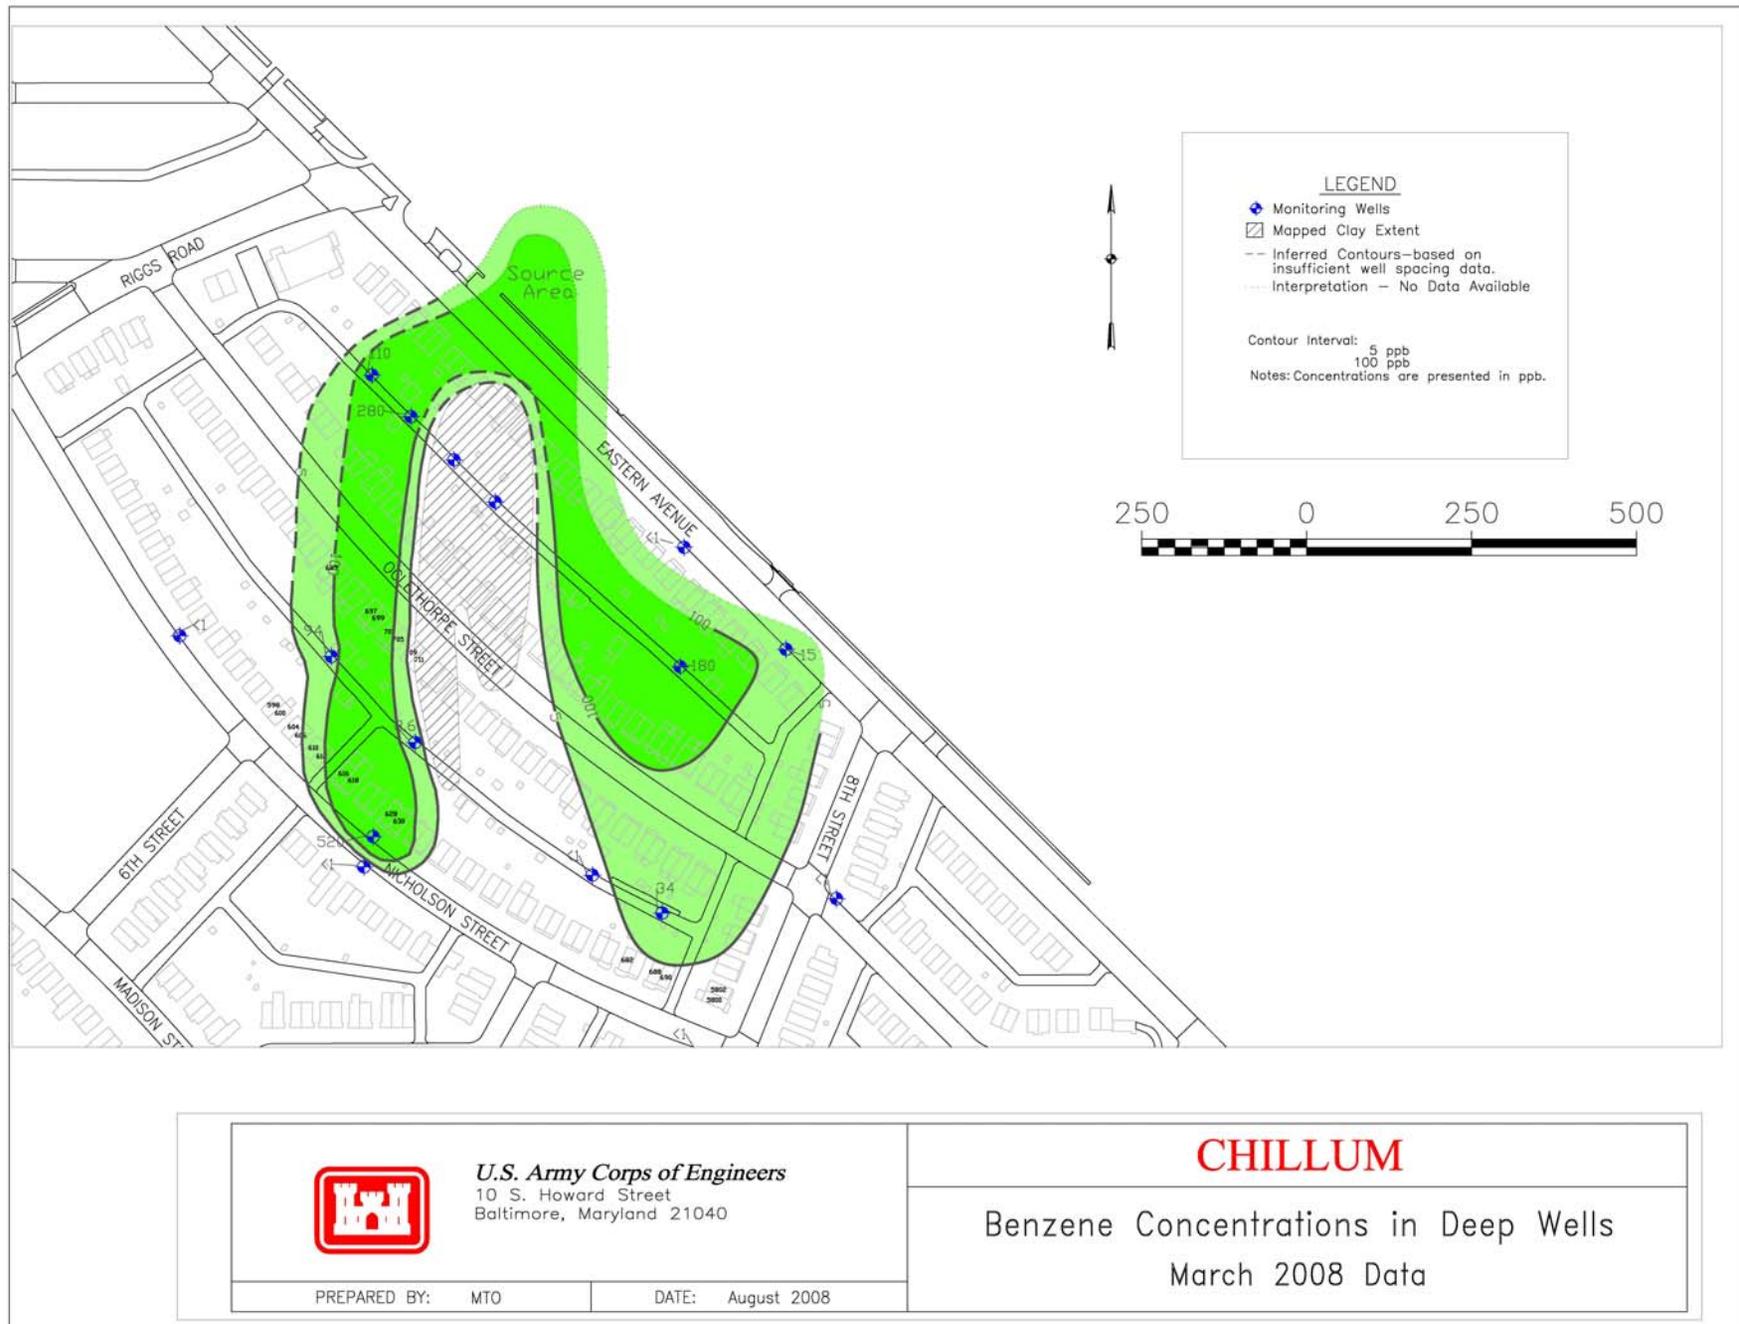


Figure 11 Benzene Concentrations in Deep Monitoring Wells March 2008 (from USACE, 2008)


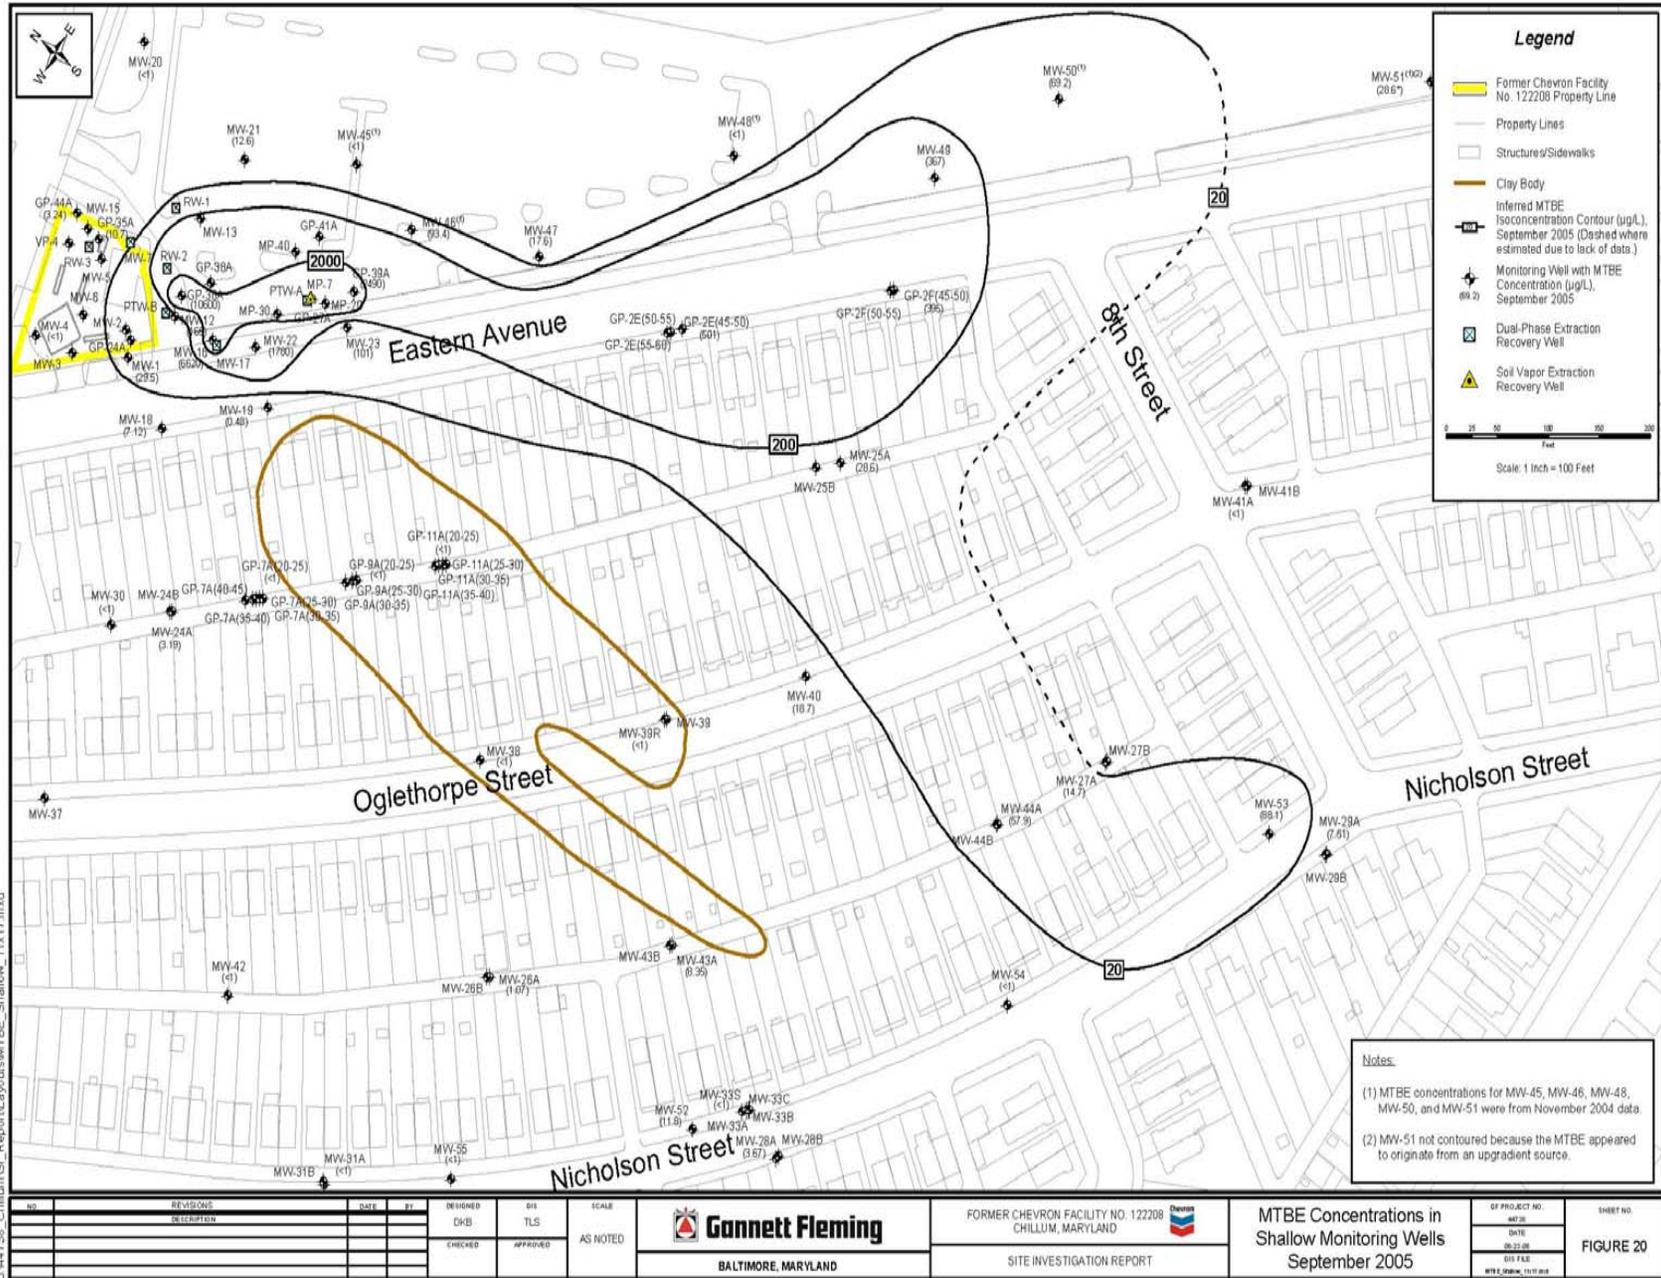


Figure 12 MTBE Concentrations in Shallow Monitoring Wells September 2005 (from Gannett-Fleming, 2006)

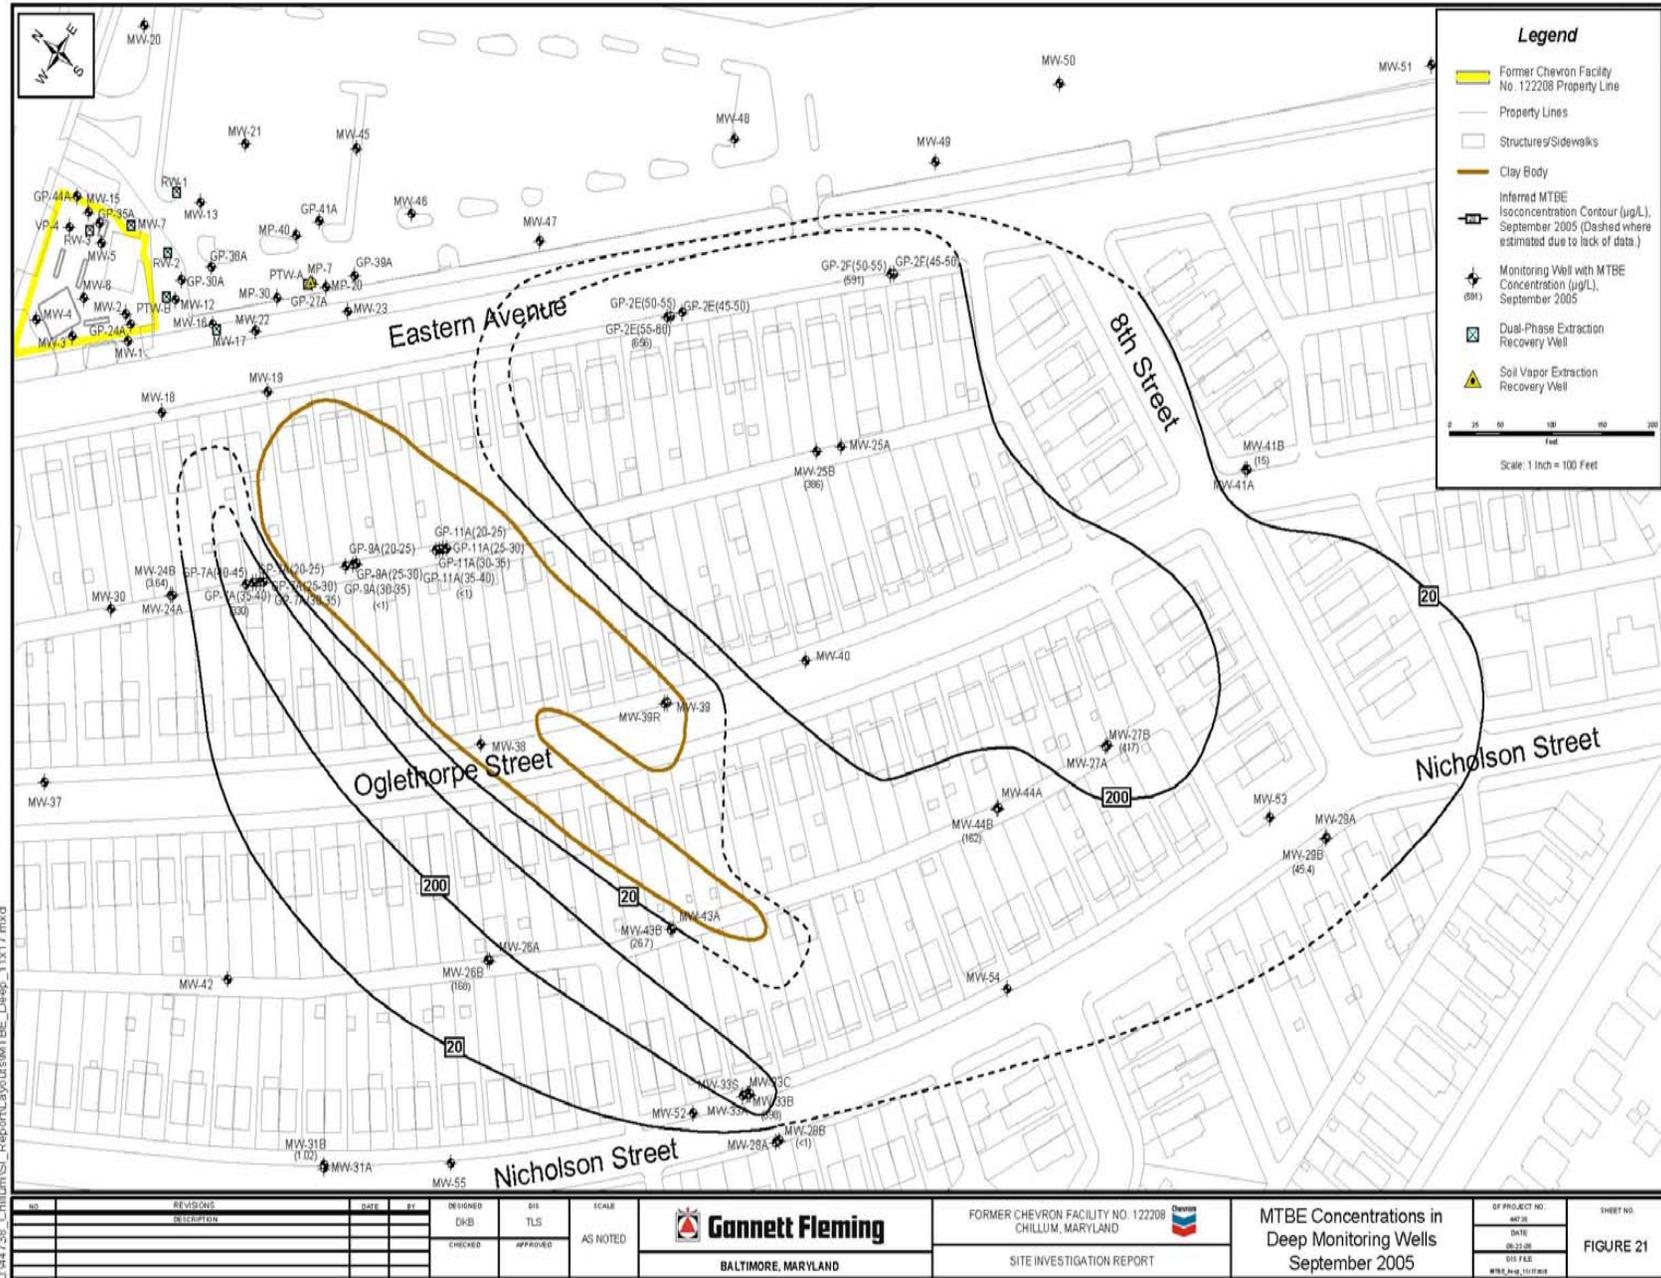

J:\44738_Chillum\SI_Report\Layouts\MTBE_Deep_11x17.mxd

Figure 13 MTBE Concentrations in Deep Monitoring Wells September 2005 (from Gannett-Fleming, 2006)



Figure 14 MTBE Concentrations in Shallow Monitoring Wells March 2008 (from USACE, 2008)



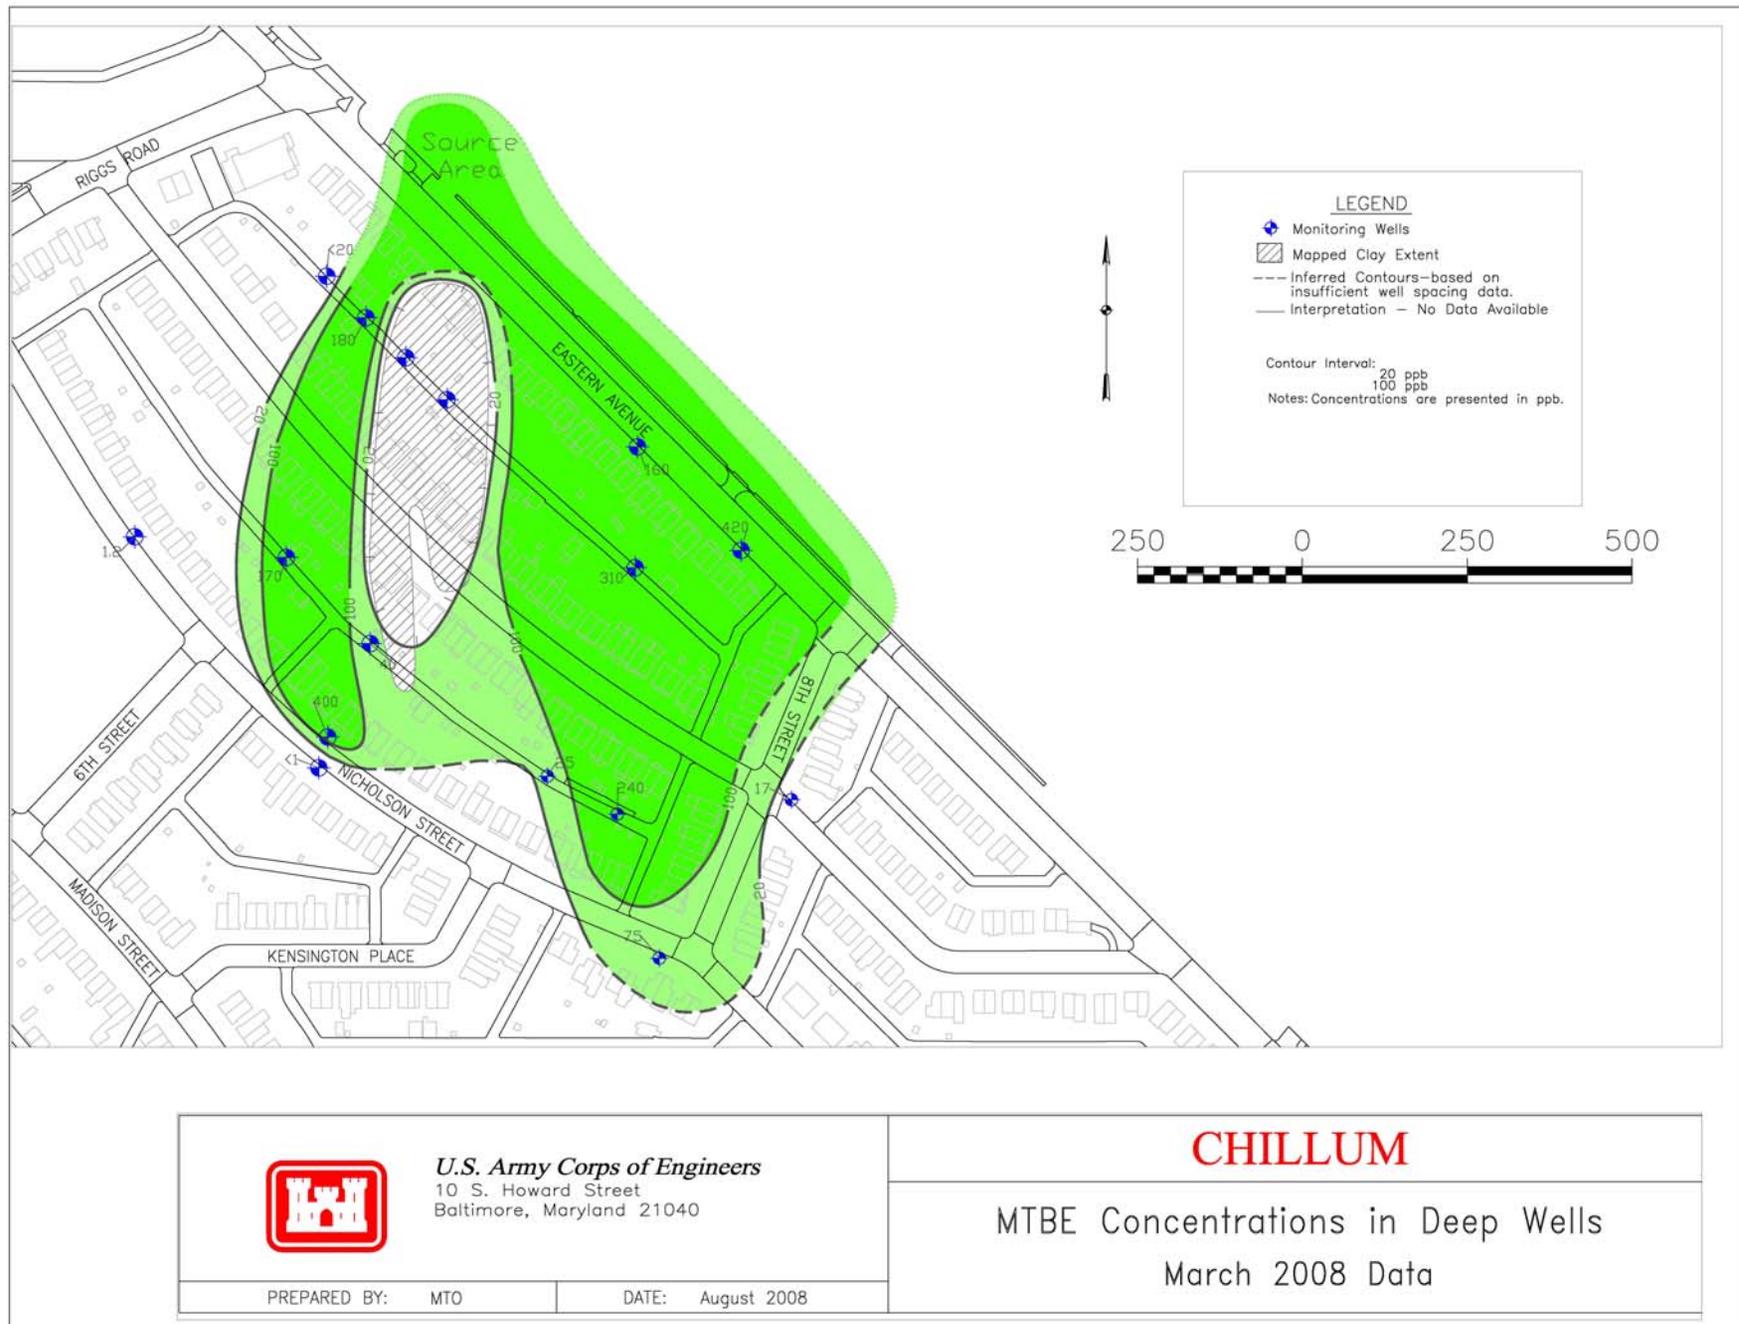


Figure 15 MTBE Concentrations in Deep Monitoring Wells March 2008 (from USACE, 2008)

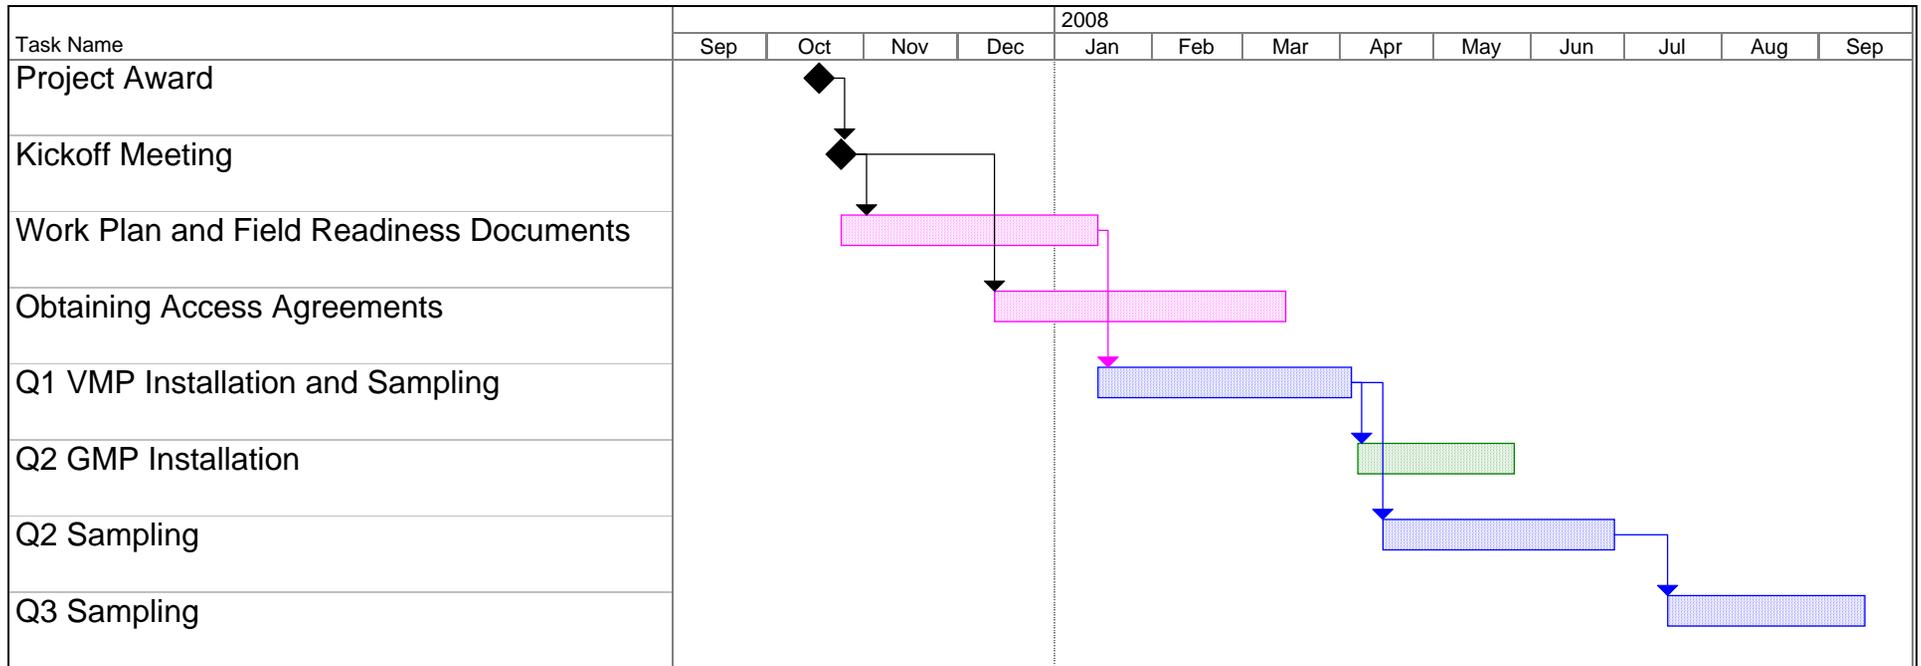

Project: Timeline_FigureXX Date: Mon 12/29/08	Task		Rolled Up Task		External Tasks	
	Progress		Rolled Up Milestone	◆	Project Summary	
	Milestone	◆	Rolled Up Progress		Group By Summary	
	Summary		Split			

Figure 18 Project Timeline

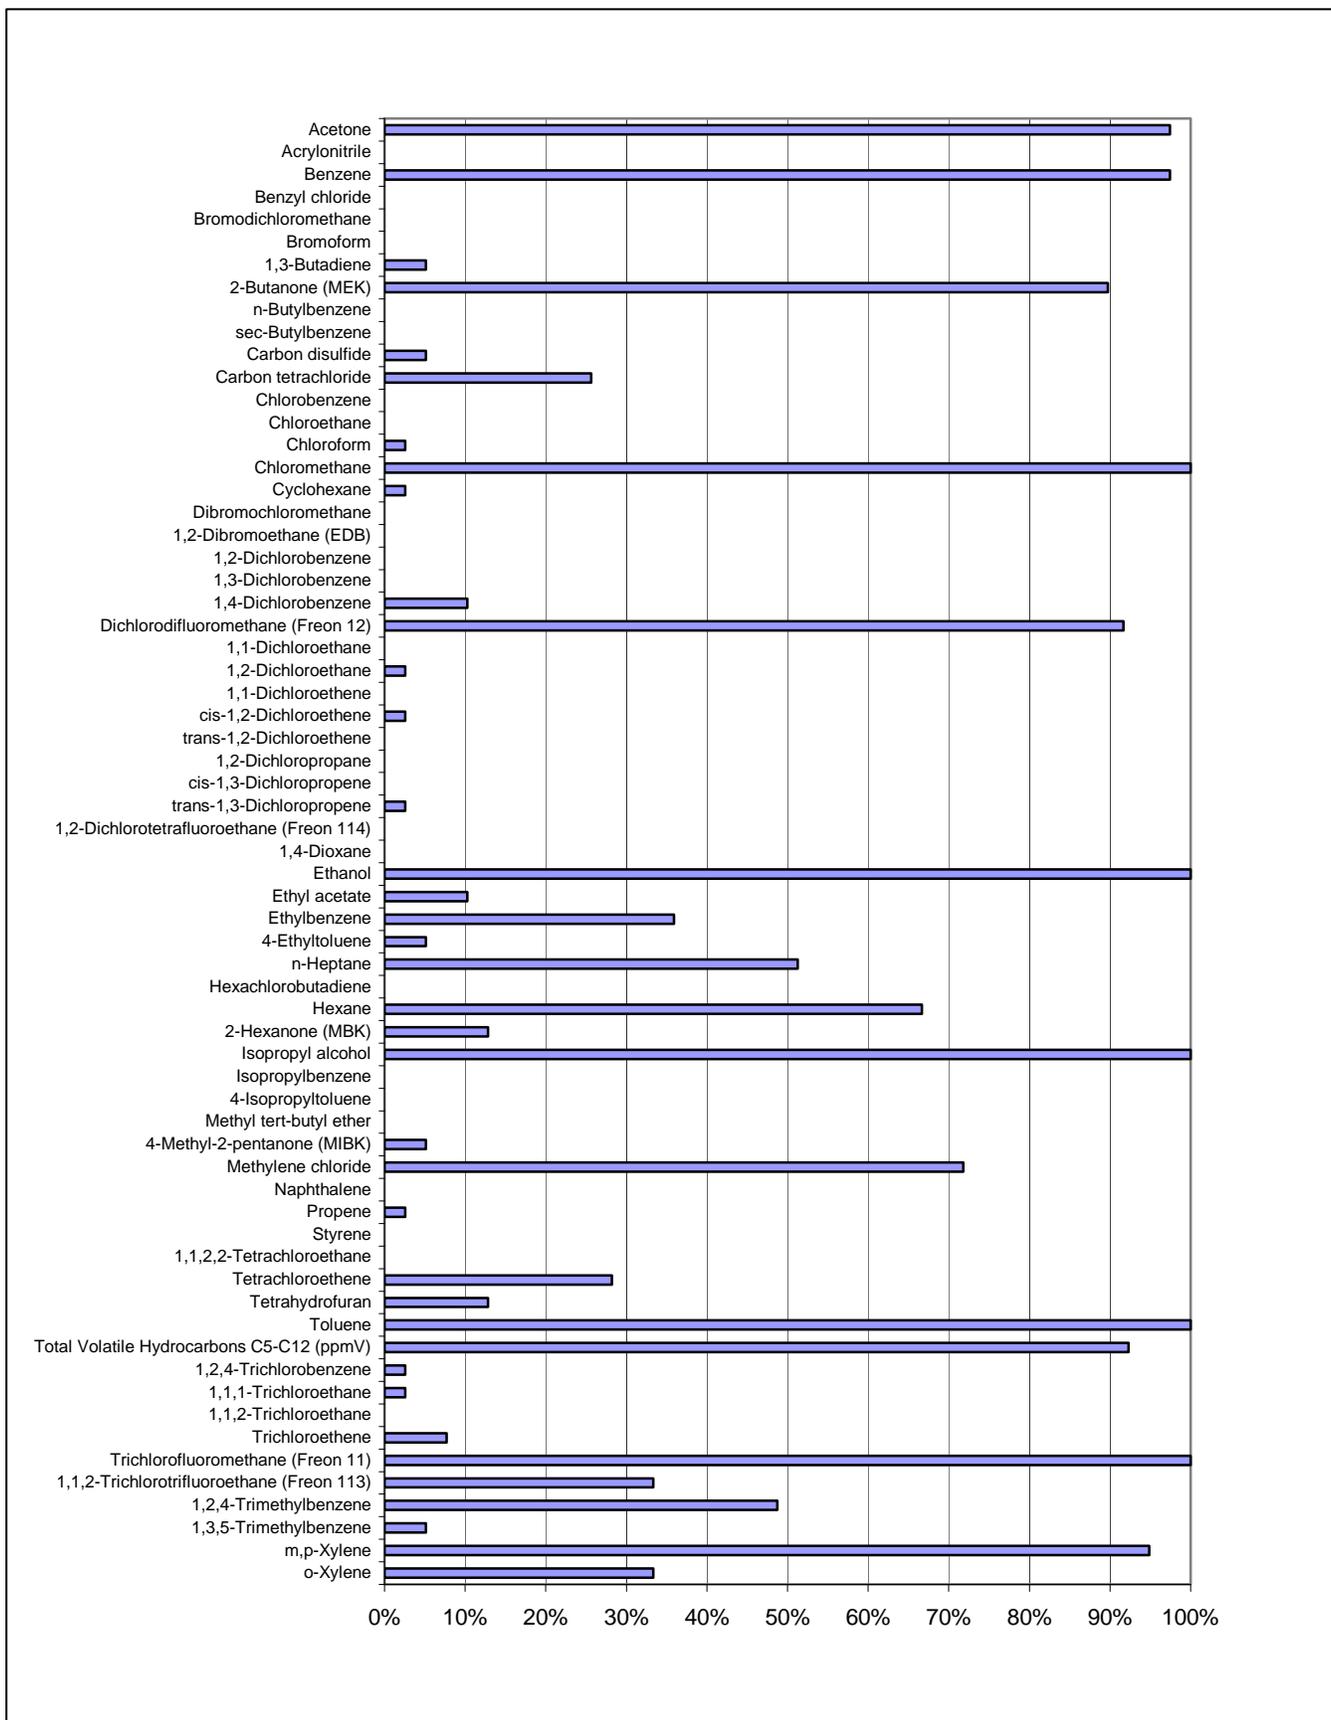


Figure 19 Frequency of Detections in Ambient Air Samples

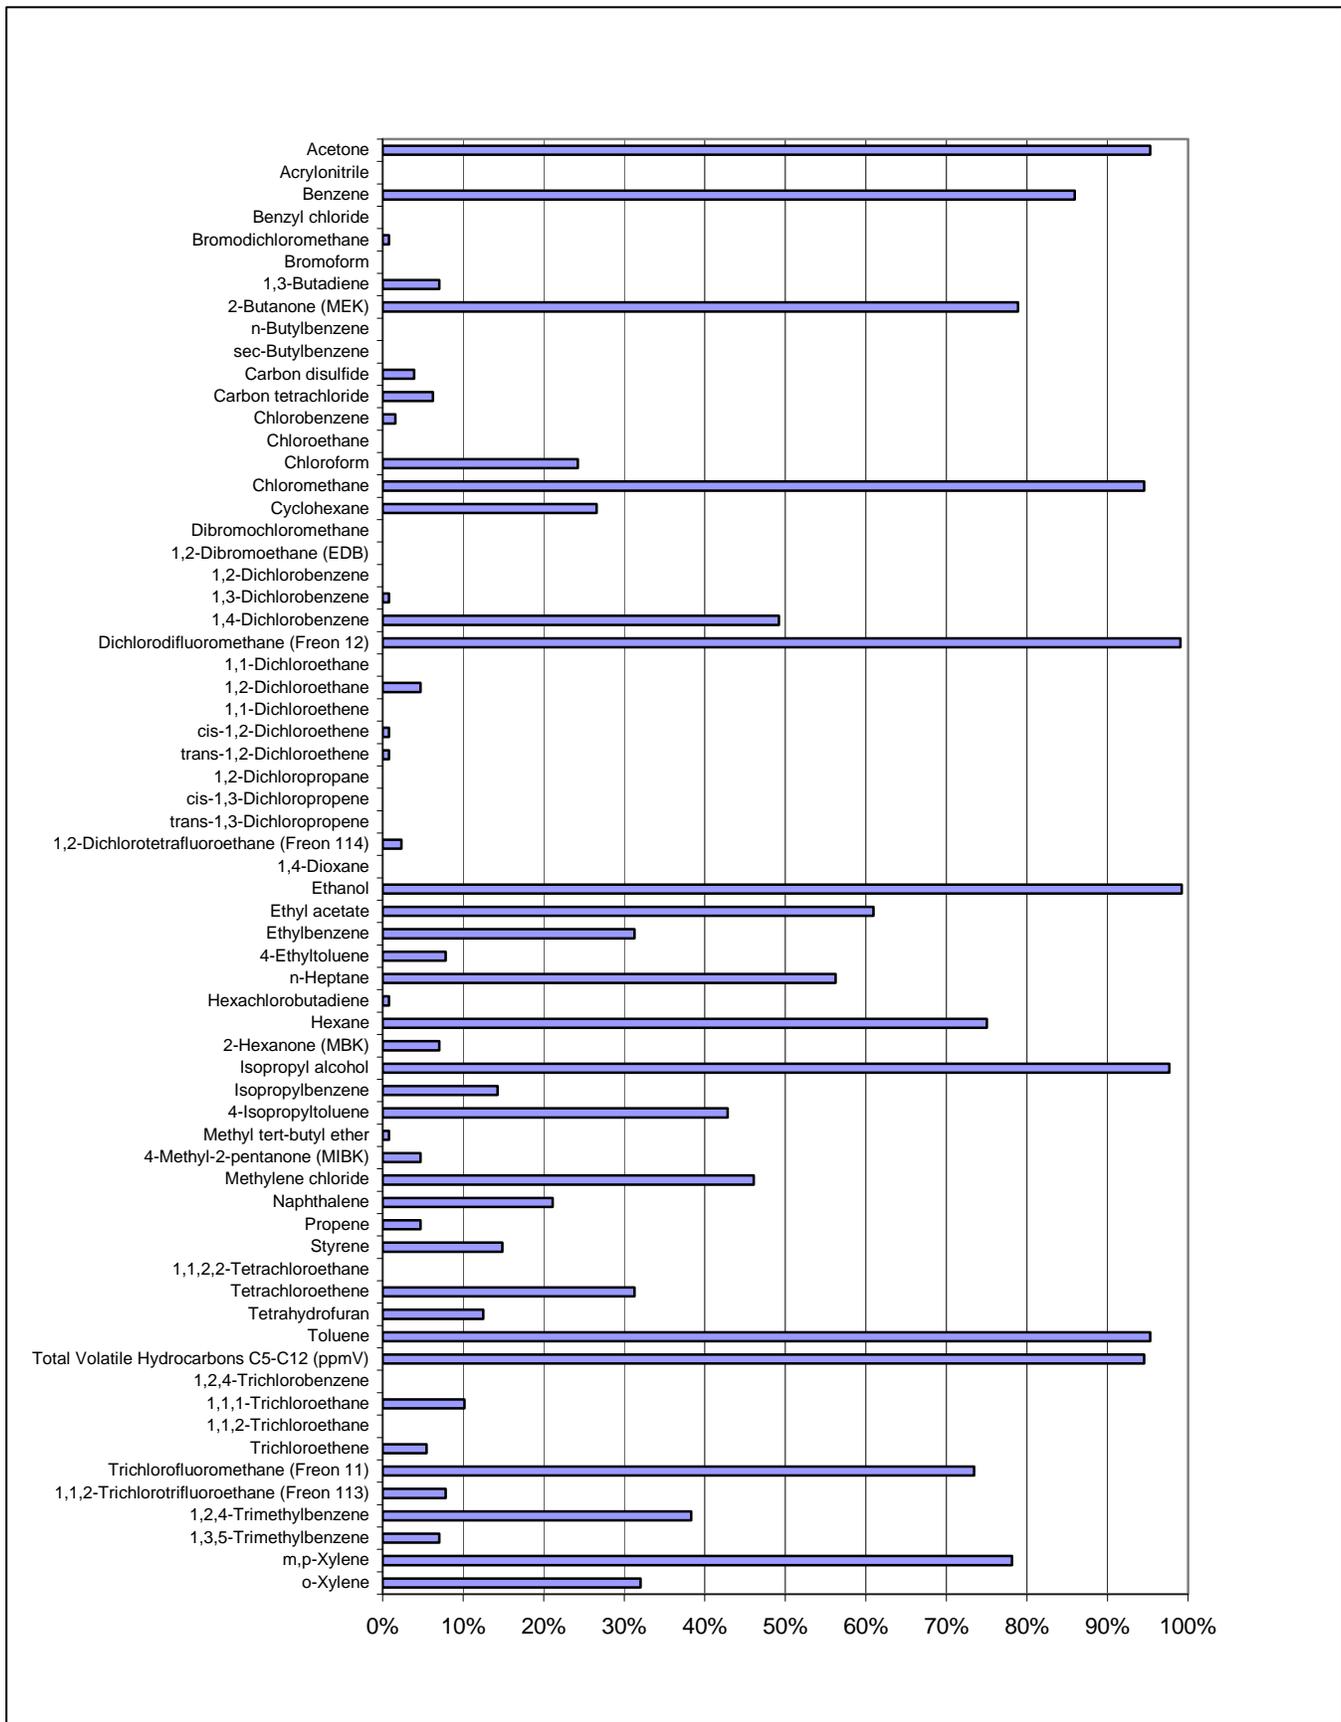


Figure 20 Frequency of Detections in Indoor Air Samples

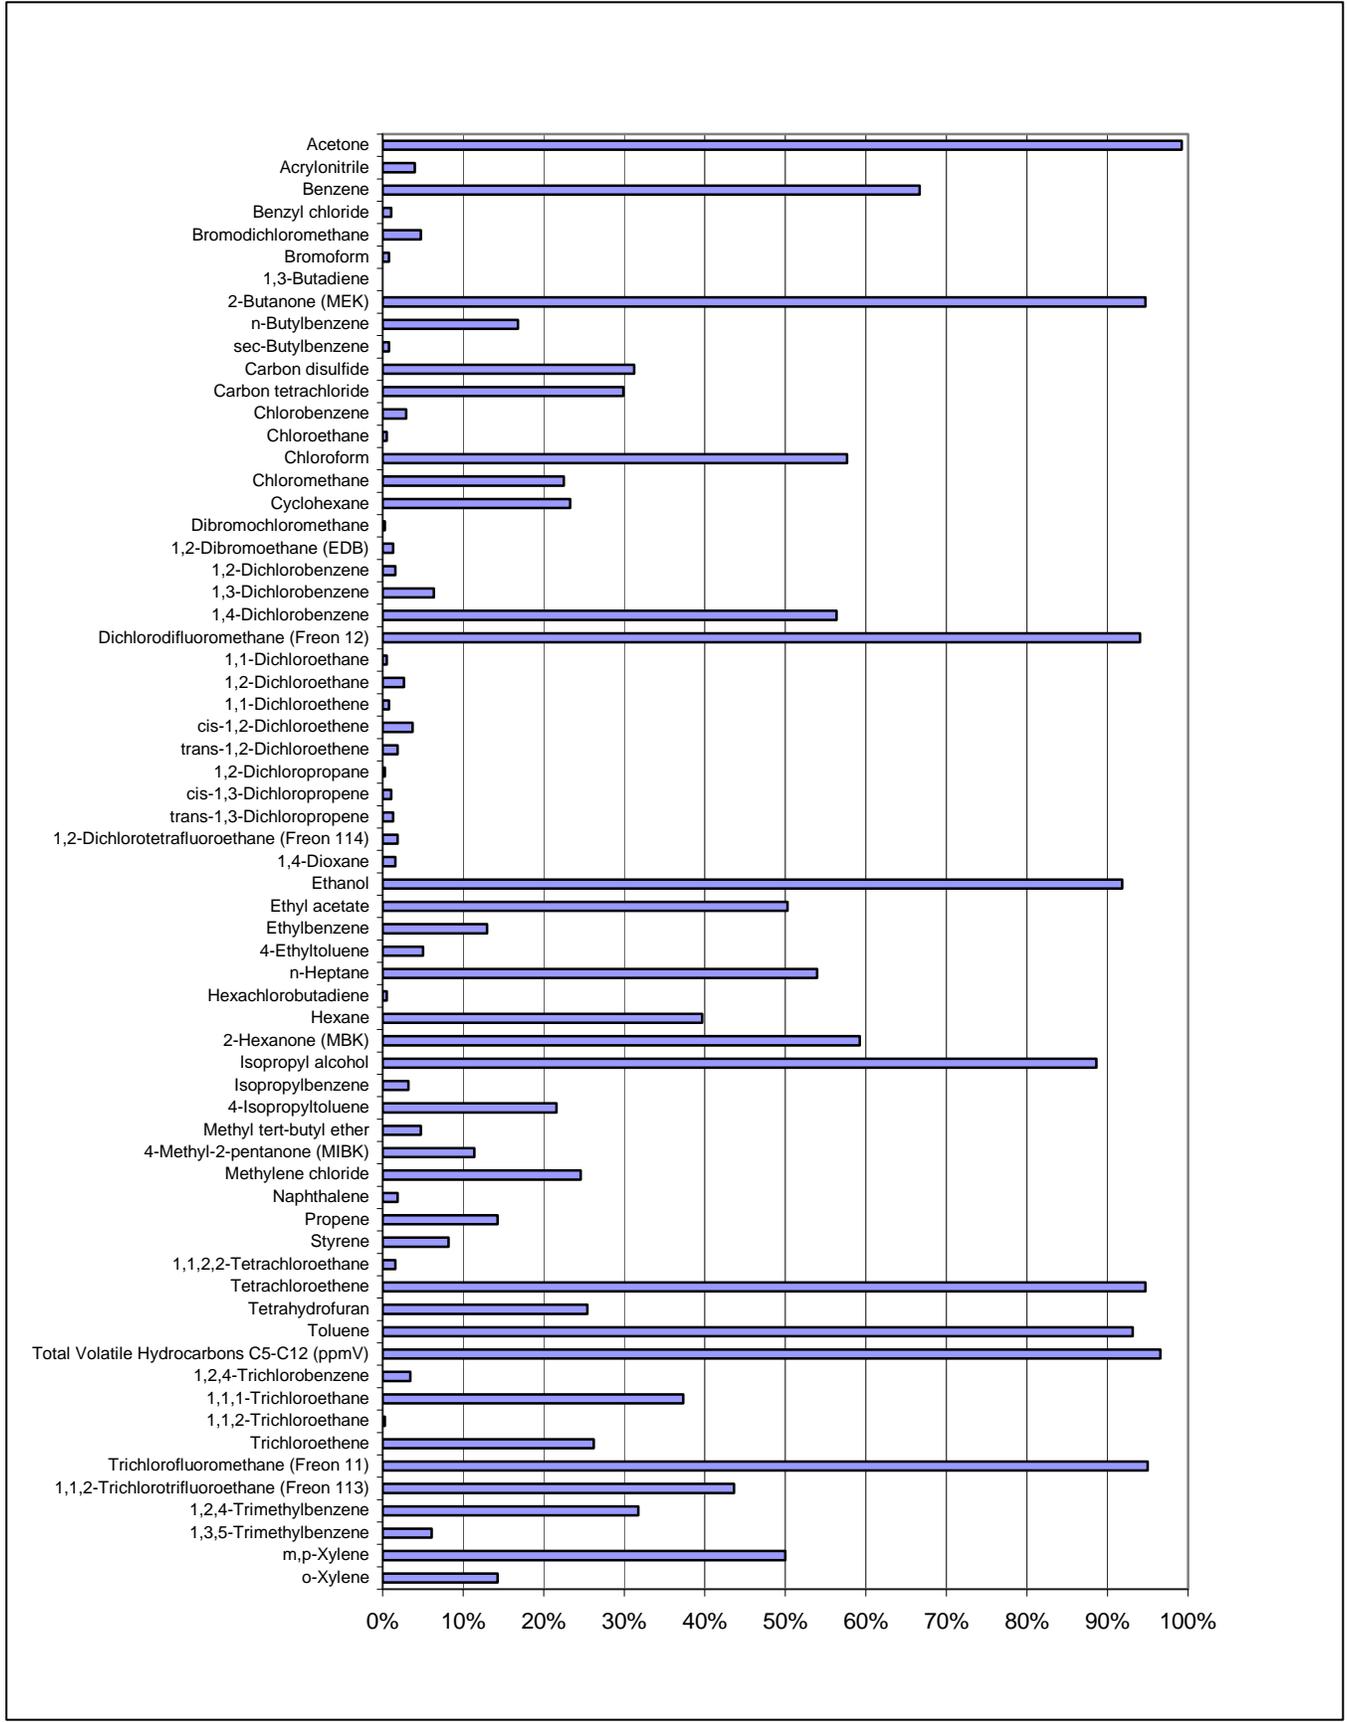


Figure 21 Frequency of Detections in Sub-Slab VMP Samples

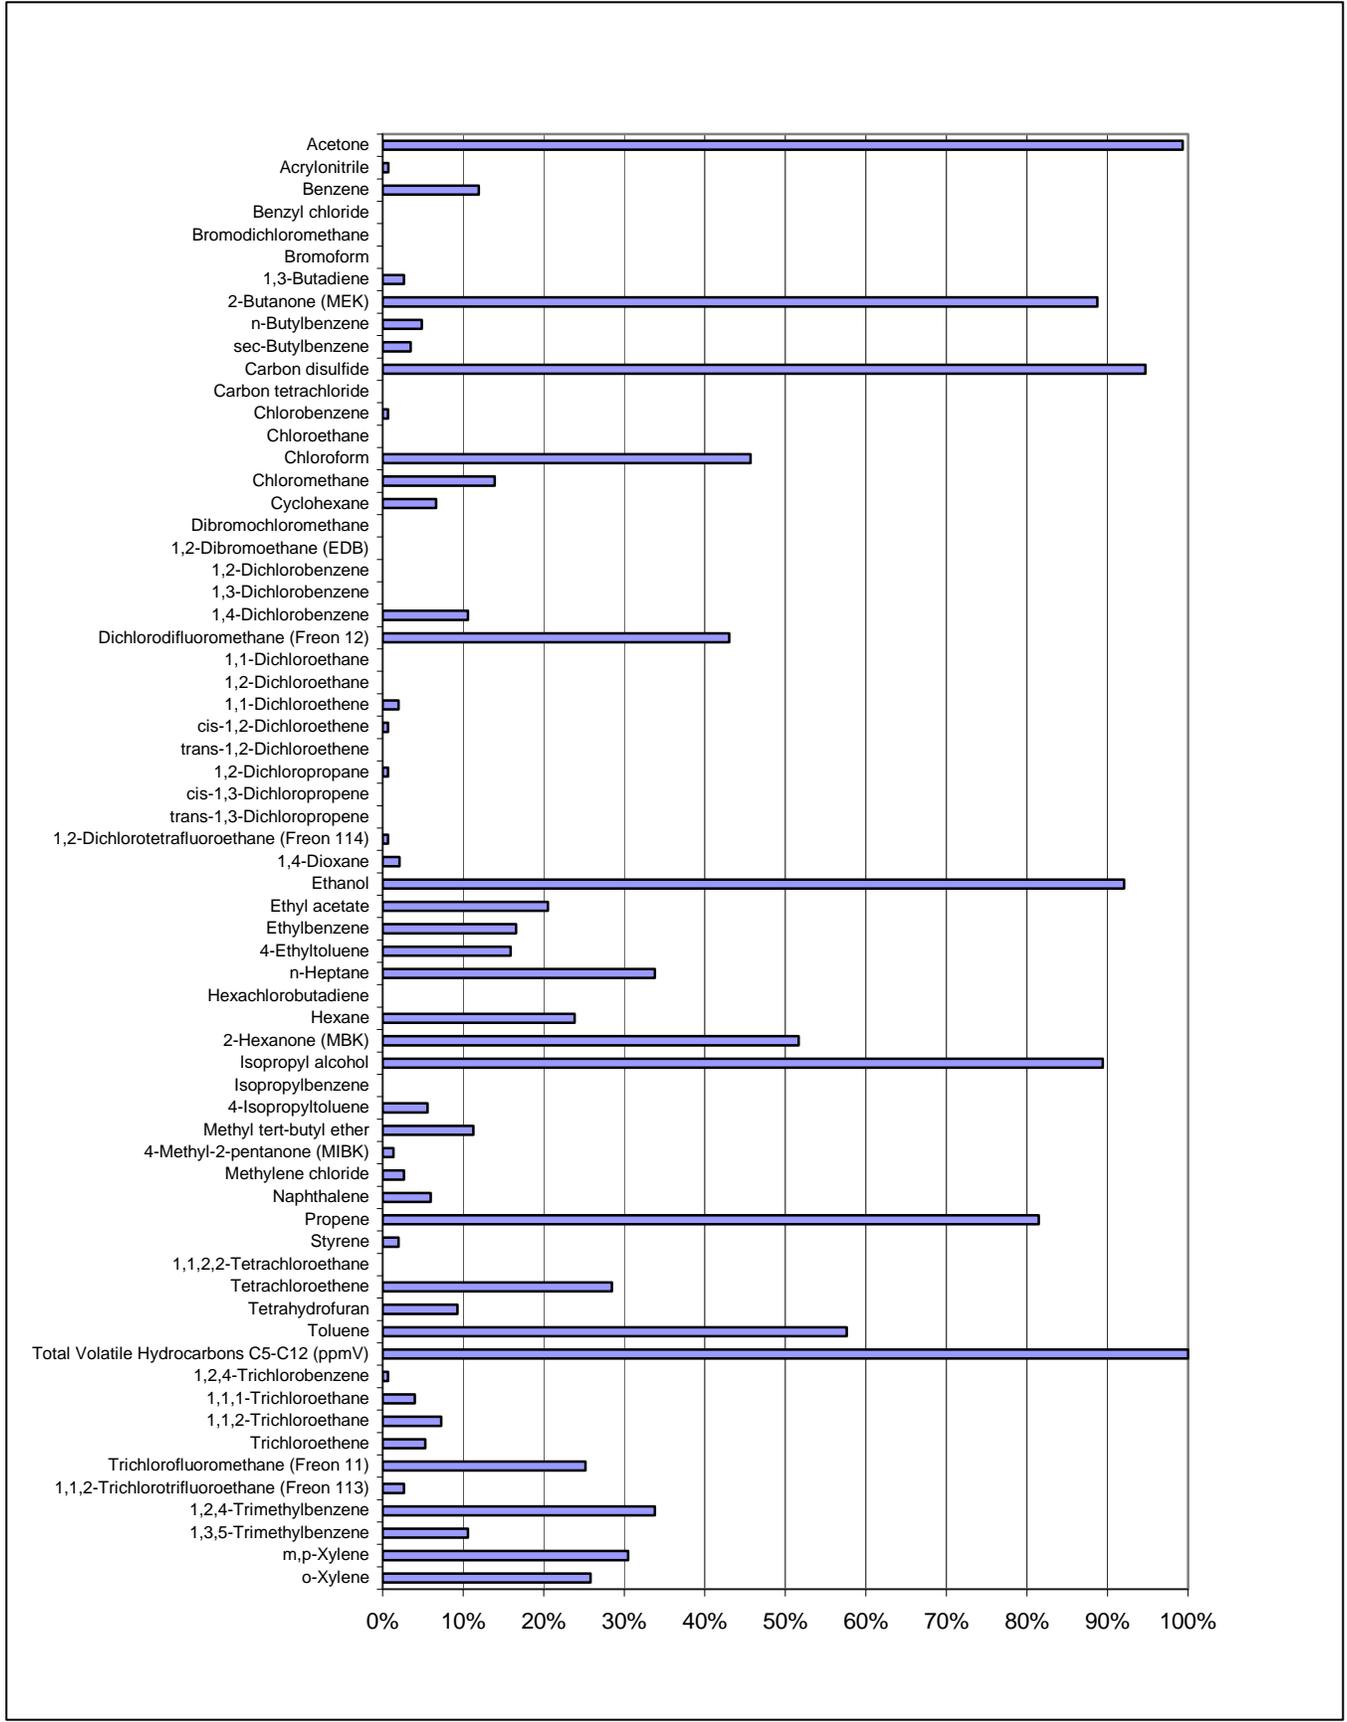


Figure 22 Frequency of Detections in Outdoor GMP Samples

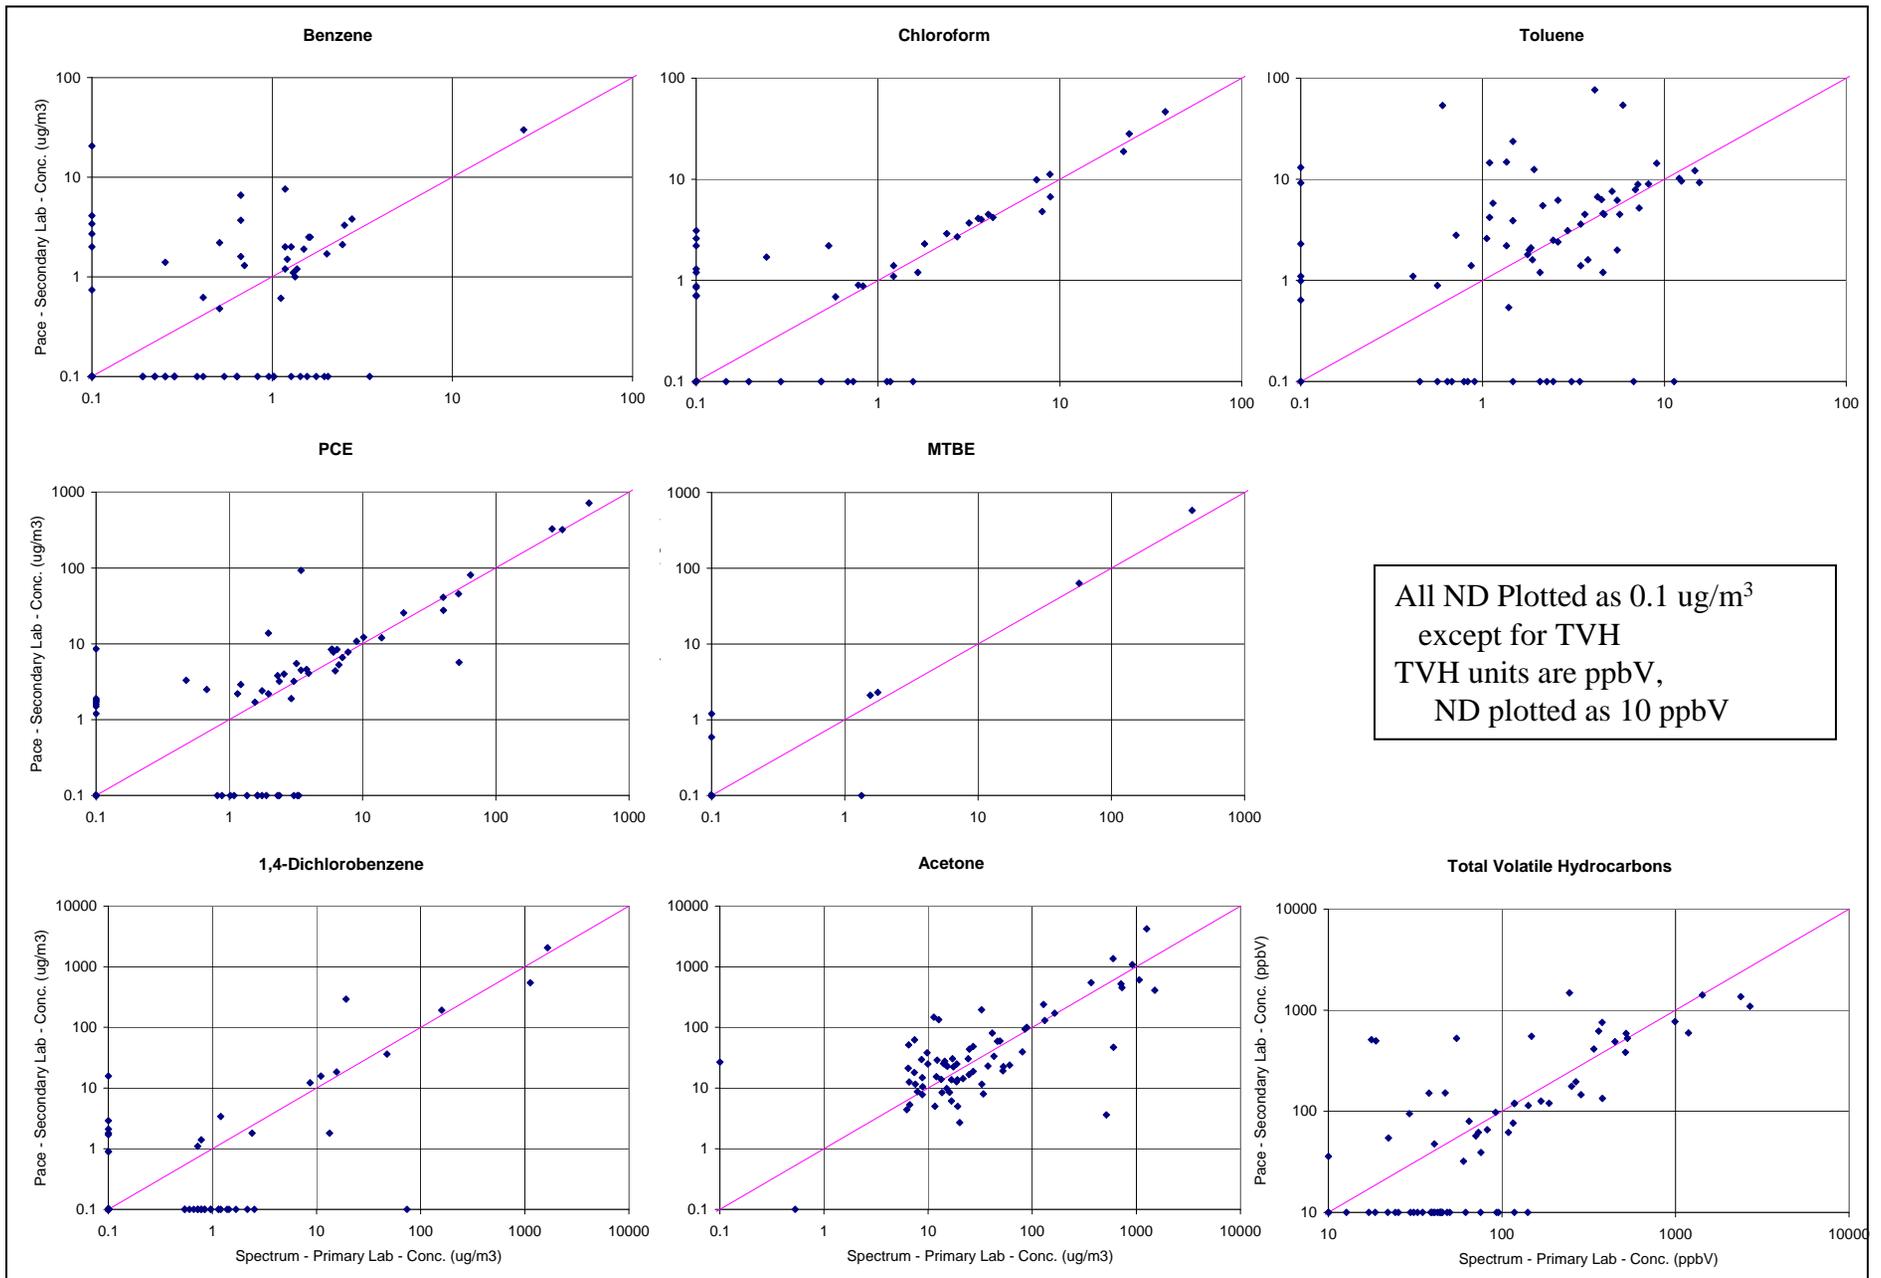


Figure 24 Scatter Plots of Concentrations in Duplicate Samples from Spectrum Analytical and Pace Laboratories (for Selected Analytes)

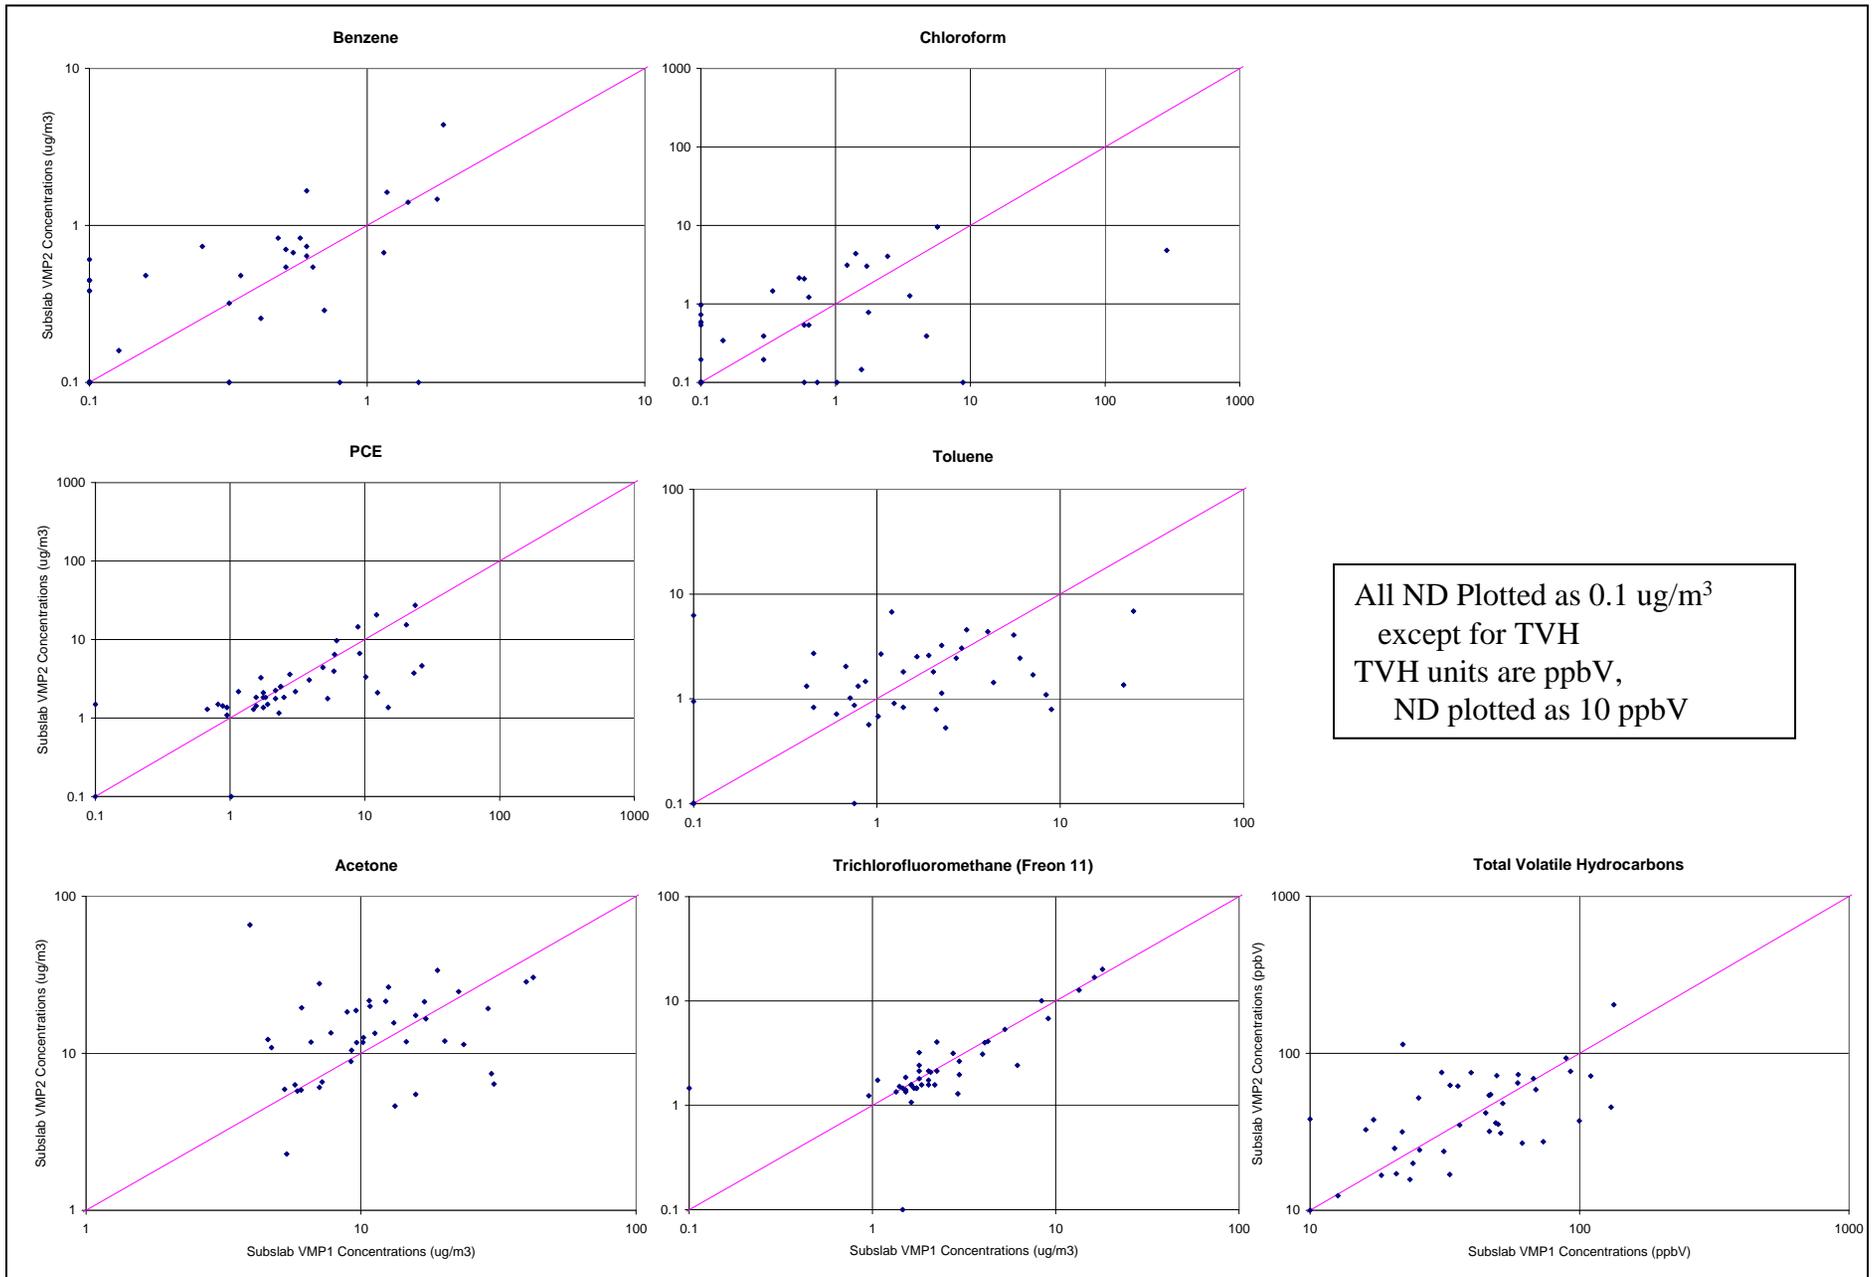


Figure 25 Scatter Plots of Concentrations in Samples from Homes with Pairs of Sub-Slab VMPs (for Selected Analytes)

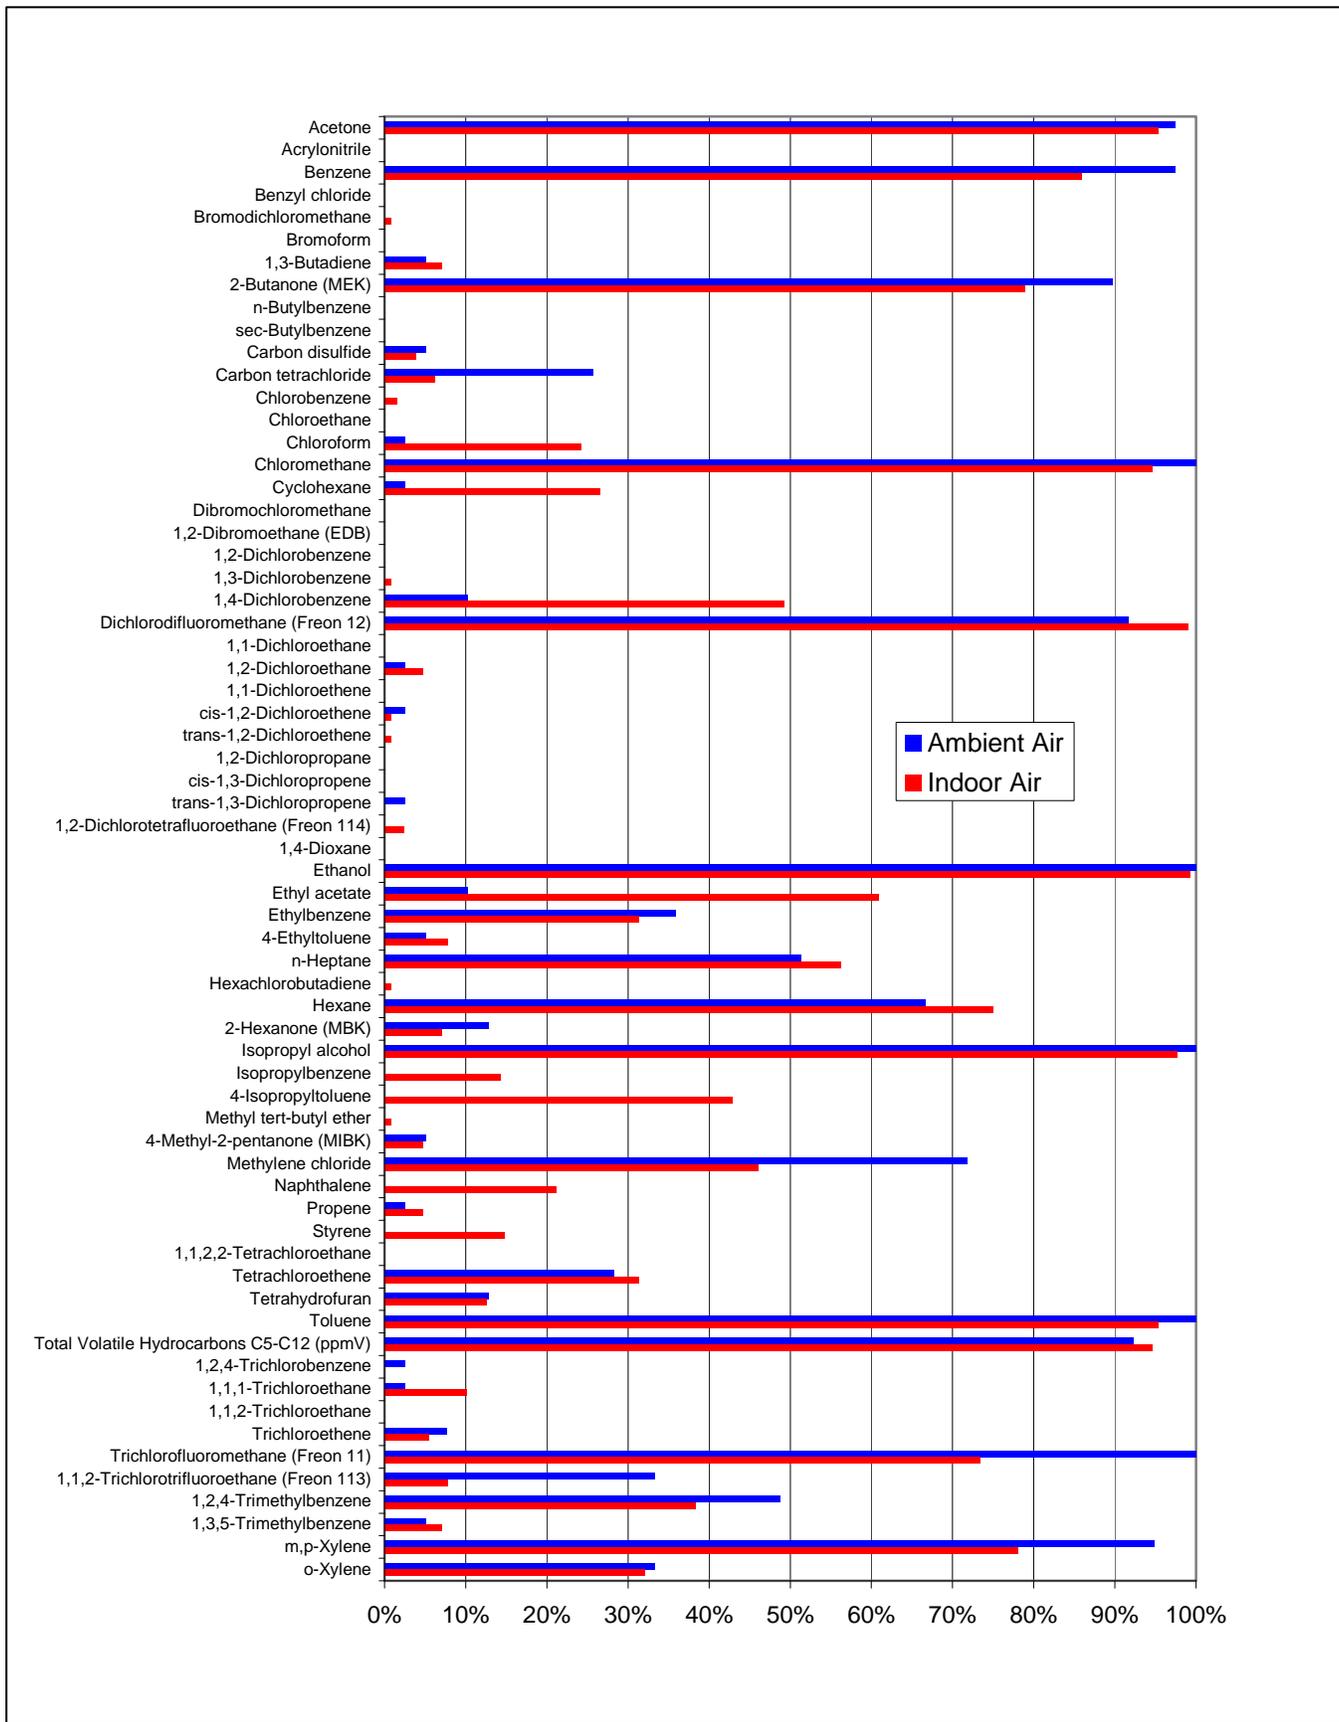


Figure 26 Comparison of Detections between Indoor Air and Ambient Air Samples



Figure 27 Comparison of Detections between Indoor Air and Sub-Slab VMP Samples

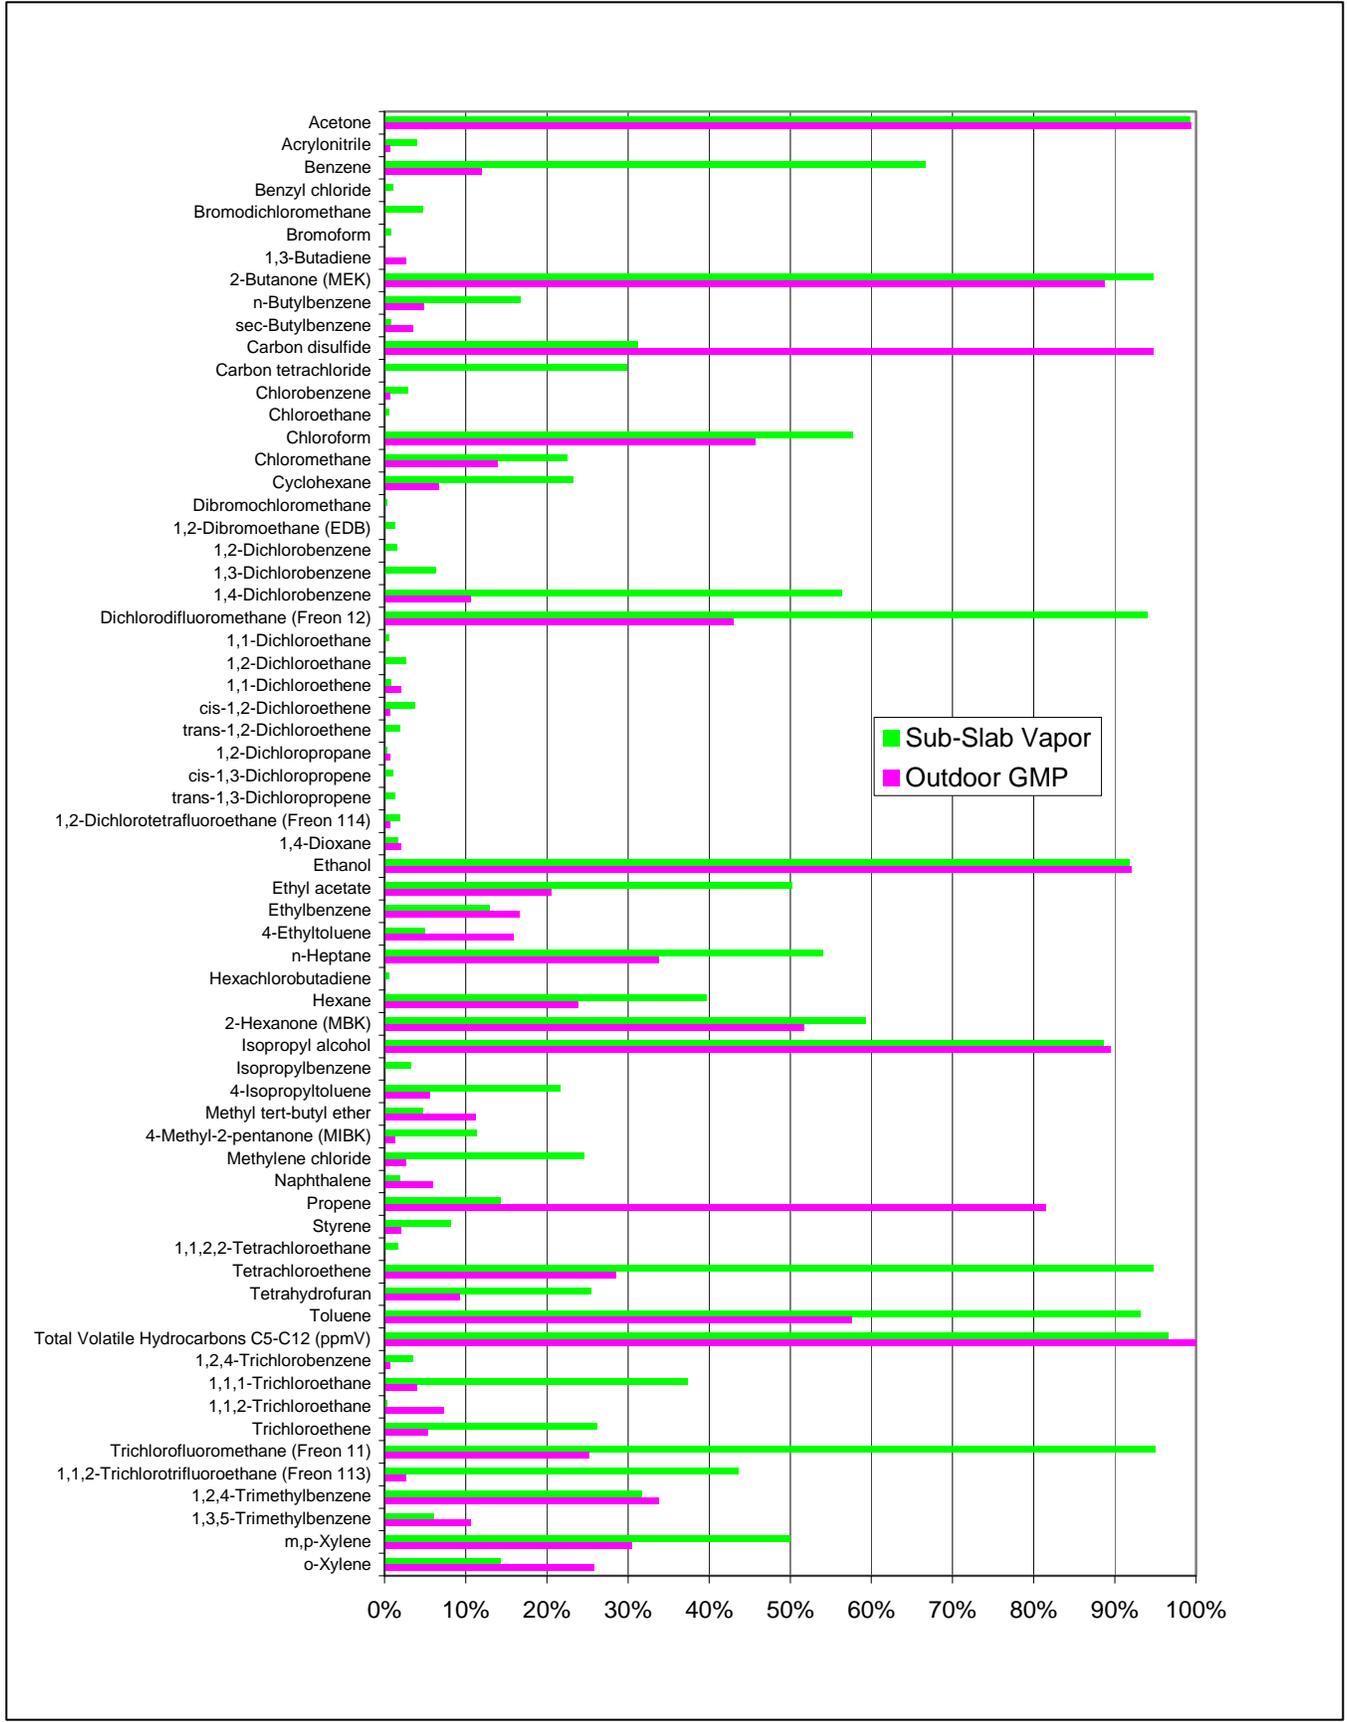


Figure 28 Comparison of Detections between Indoor VMP and Outdoor GMP Samples

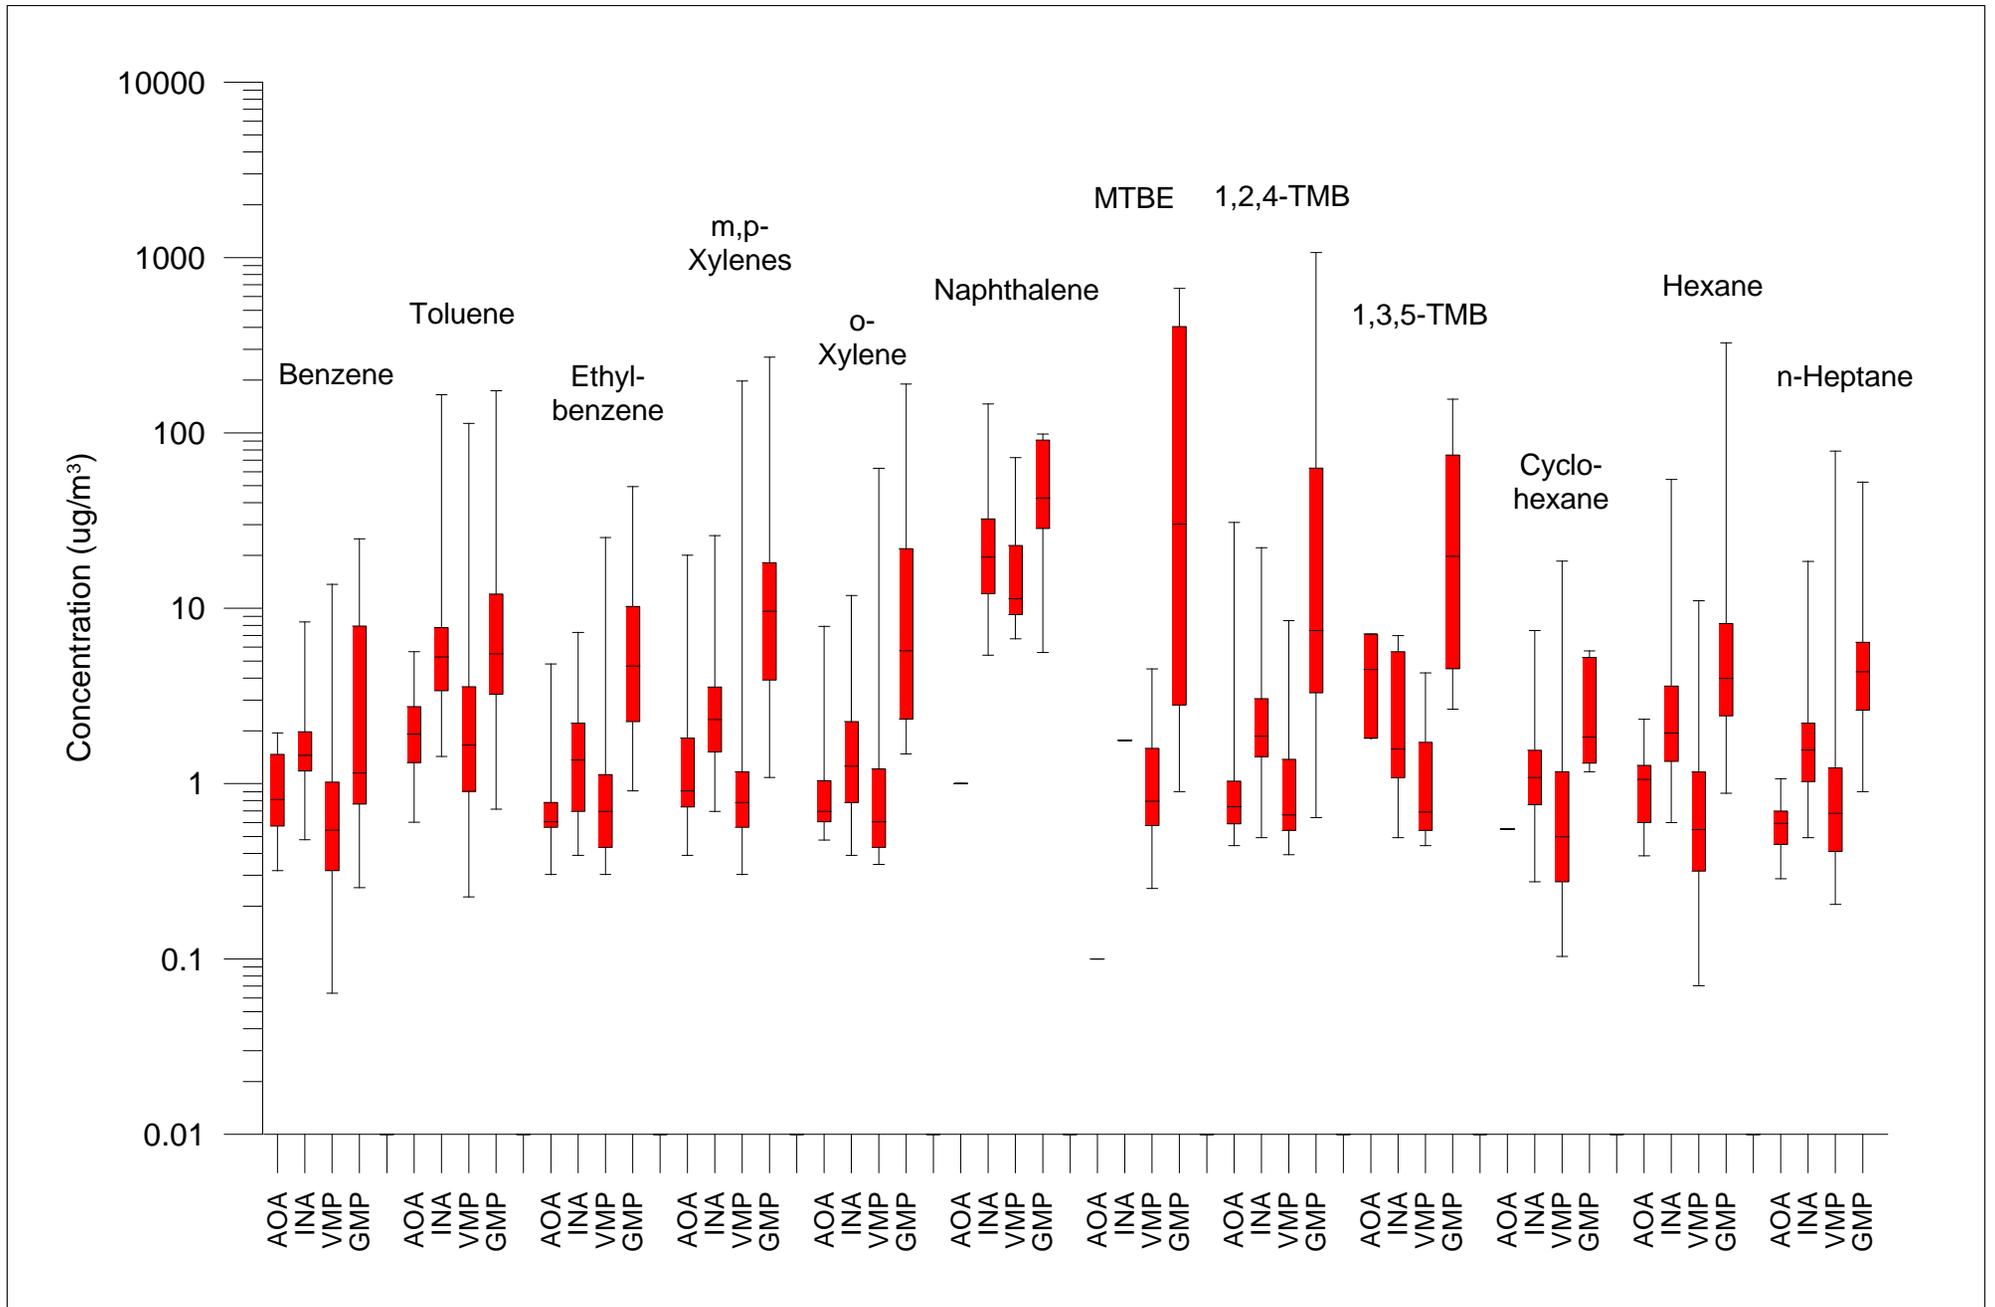


Figure 29 Box-Whisker Plot Summarizing Detections of Selected Petroleum-Related Compounds in Vapor Samples

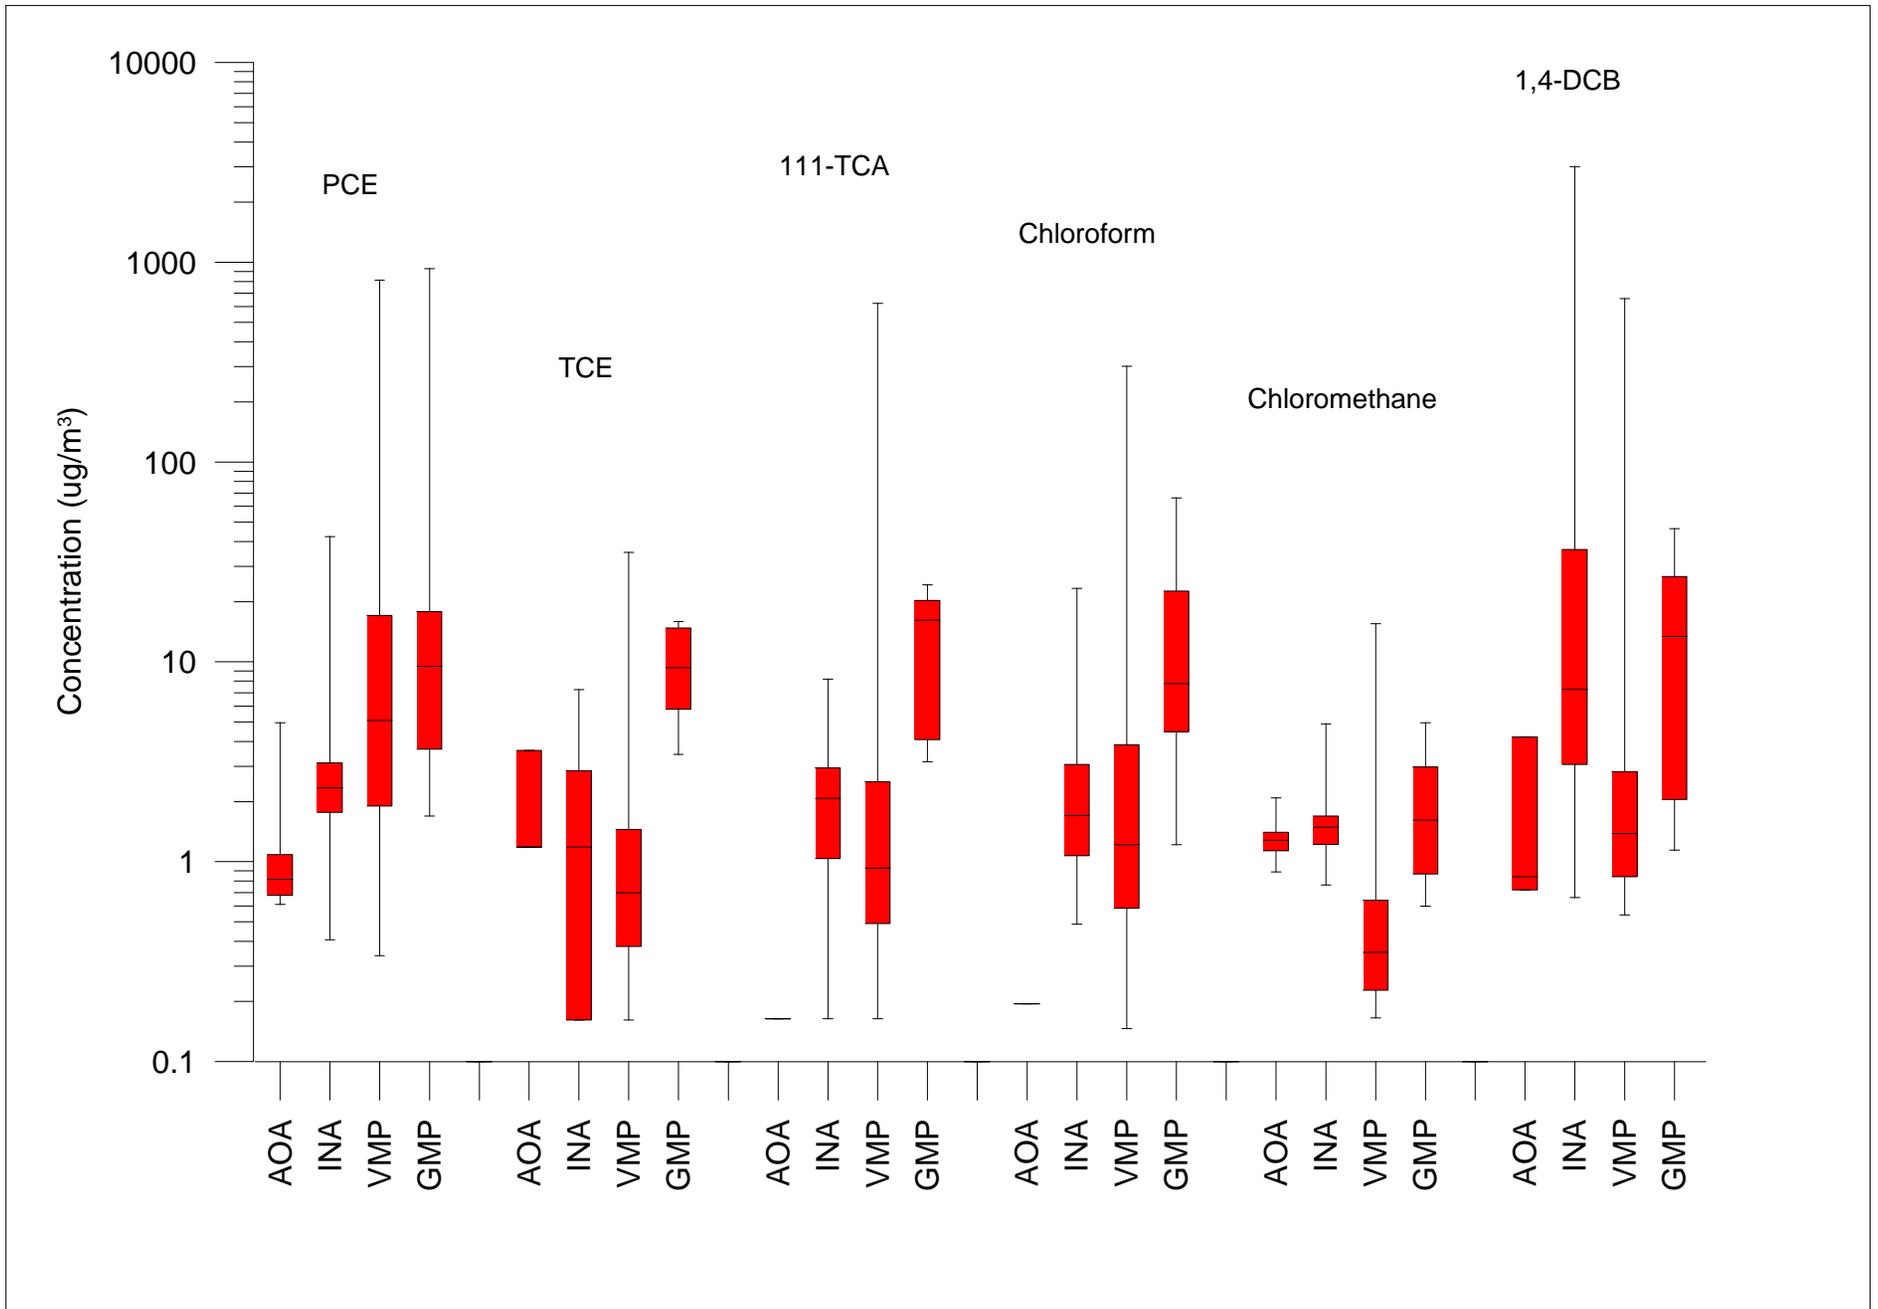


Figure 30 Box-Whisker Plot Summarizing Detections of Selected Chlorinated Compounds in Vapor Samples

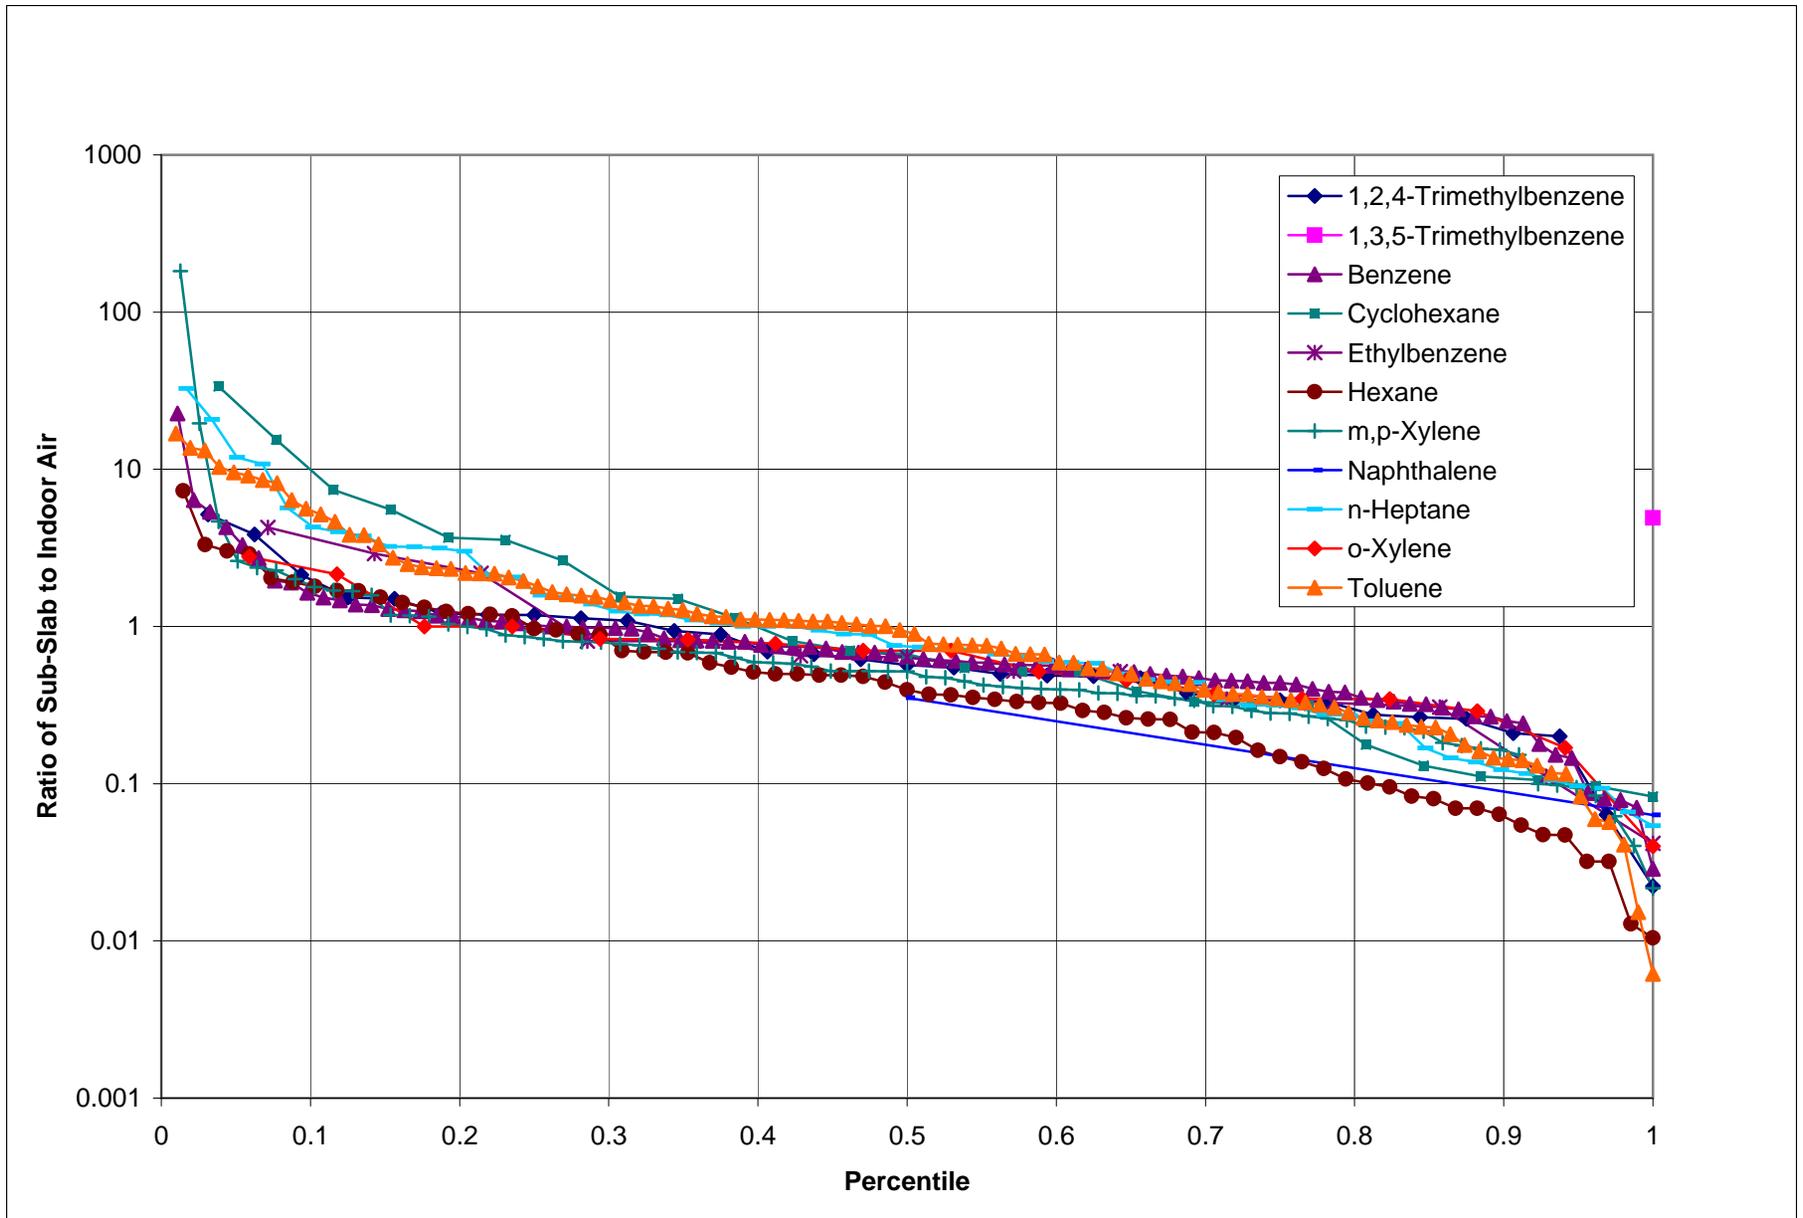


Figure 35 Ratio of Sub-Slab to Indoor Air Concentrations for Selected Petroleum-Related Compounds

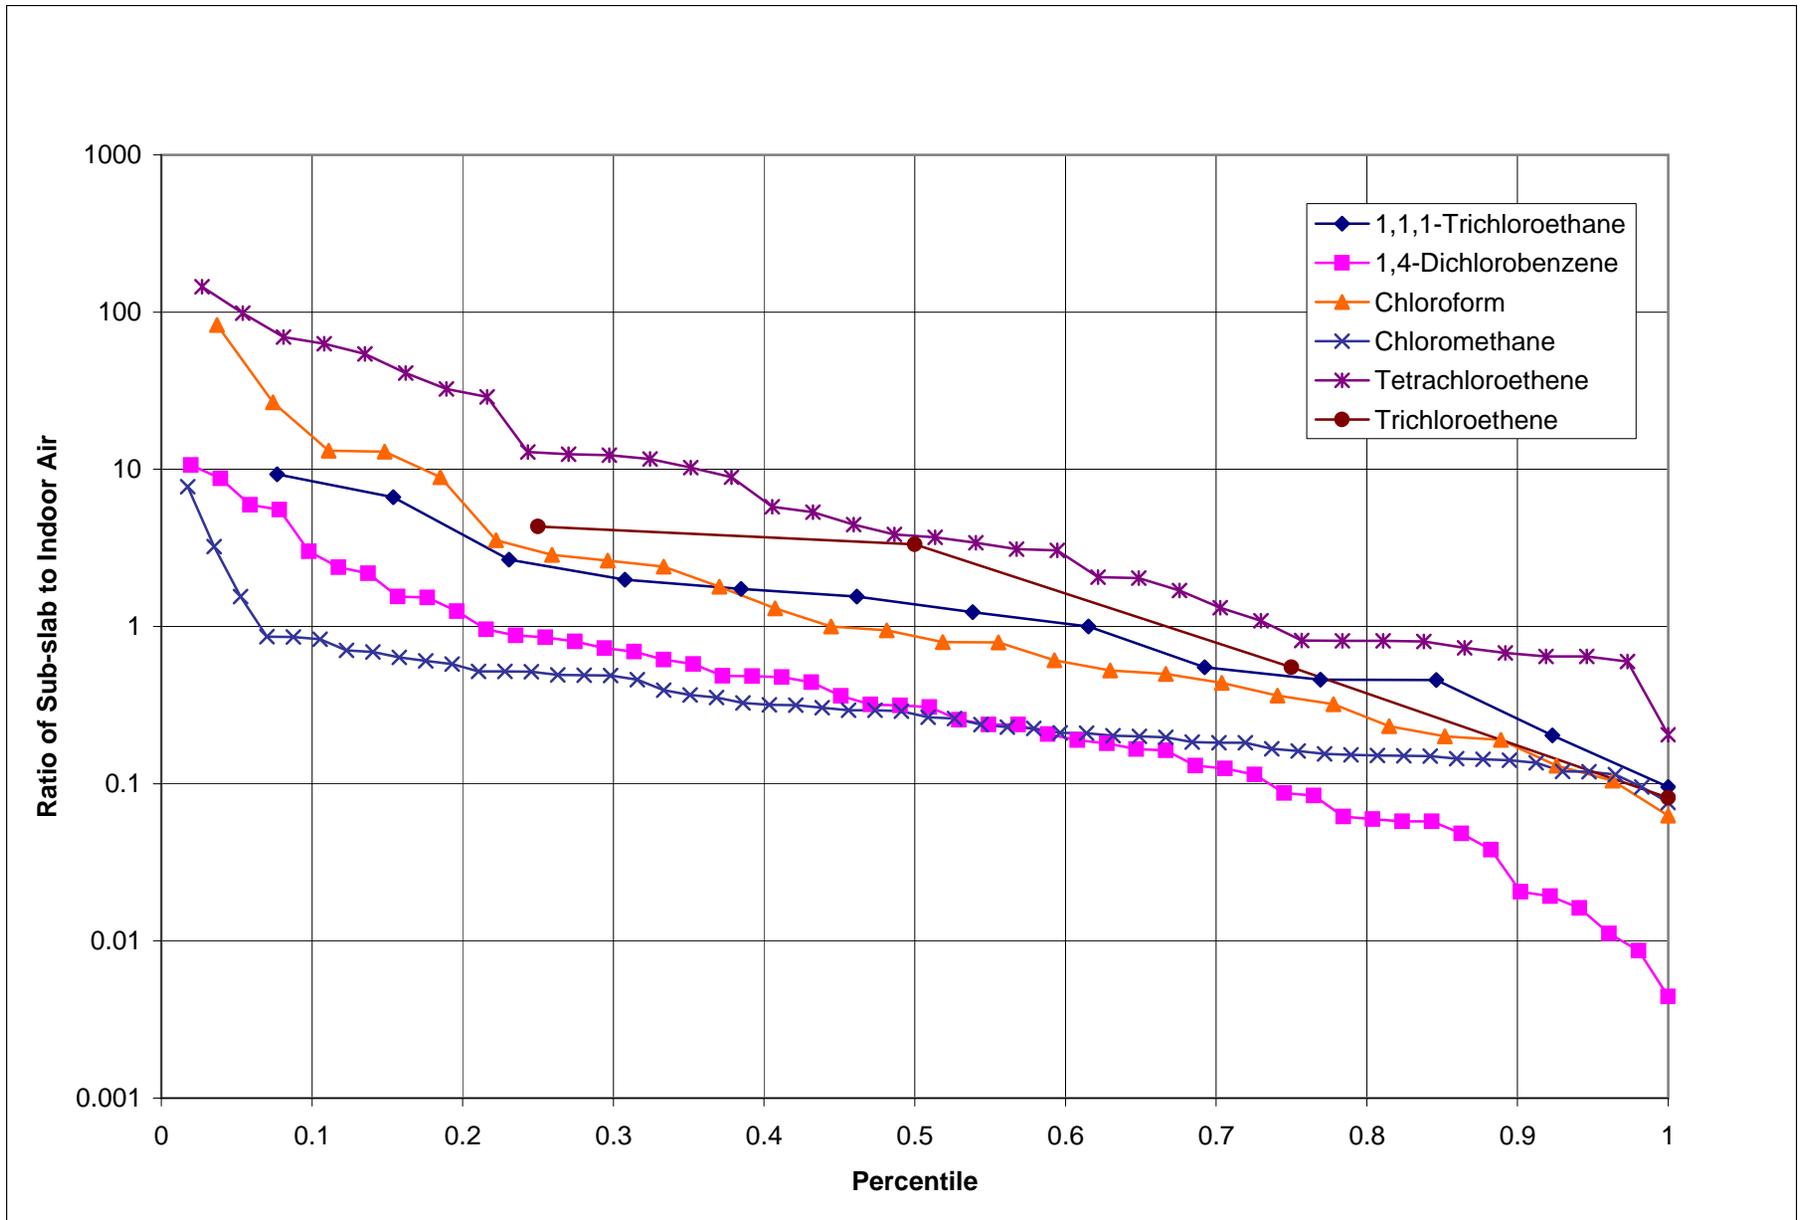


Figure 36 Ratio of Sub-Slab to Indoor Air Concentrations for Selected Chlorinated Compounds

TABLES

TABLE 1 Summary of Vapor Sampling Conducted by Chevron, USEPA , and the District of Columbia Department of Health (DOH)
Subsurface Vapor Samples

Analyte	Number of Samples	Earliest Sample Date	Latest Sample Date	Minimum Result (ug/m ³)	Maximum Result (ug/m ³)
Benzene	216	Jan-02	Jun-05	1.4	160
Toluene	214	Jan-02	Jun-05	1.7	1100
Ethylbenzene	216	Jan-02	Jun-05	< 1.8	91
Xylenes-m,p	59	Jul-03	Jun-04	< 1.9	71
Xylene-o	59	Jul-03	Jun-04	< 1.8	28
MTBE	216	Jan-02	Jun-05	< 3.6	2300
PCE	35	Jul-03	Apr-04	< 6.8	2101.8

Sources: Gannett Fleming Inc. (2003b, 2004, 2006), US Environmental Protection Agency (2003a)

Indoor Basement Air Samples, Excluding DOH Studies

Analyte	Number of Samples	Earliest Sample Date	Latest Sample Date	Minimum Result (ug/m ³)	Maximum Result (ug/m ³)
Benzene	94	Jul-03	Jun-05	< 0.4	13
Toluene	94	Jul-03	Jun-05	1.3	42
Ethylbenzene	94	Jul-03	Jun-05	< 0.61	26
Xylenes-m,p	94	Jul-03	Jun-05	0.76	84
Xylene-o	82	Jul-03	Jun-05	0.7	22
MTBE	94	Jul-03	Jun-05	< 0.39	25.0
PCE	48	Apr-04	Jun-05	< 0.97	23.1

Sources: District of Columbia, Department of Health, pers. comm. (2008), Gannett Fleming (2005, 2006)
US Environmental Protection Agency (2004a)

Indoor Basement Air Samples, BSEA (2006) Study for DOH

Analyte	Number of Samples	Earliest Sample Date	Latest Sample Date	Minimum Result (ug/m ³)	Maximum Result (ug/m ³)
Benzene	97	Jun-06	Aug-06	< 0.11	26.8 J
Toluene	97	Jun-06	Aug-06	< 0.17	155.0
Ethylbenzene	97	Jun-06	Aug-06	< 0.18	79.9
Xylenes-m,p	97	Jun-06	Aug-06	< 0.52	196.9
Xylene-o	97	Jun-06	Aug-06	< 0.25	75.3
MTBE	97	Jun-06	Aug-06	< 0.26	63.5
PCE	97	Jun-06	Aug-06	1.3 J	38.9

Sources: Building Sciences and Engineering Associates Ltd. (2006)

Indoor Air Samples, DOH Winter 2007

Analyte	Number of Samples	Earliest Sample Date	Latest Sample Date	Minimum Result (ug/m ³)	Maximum Result (ug/m ³)
Benzene	12	Mar-07	Mar-07	1.8	6.6
Toluene	12	Mar-07	Mar-07	2.7	31.4
Ethylbenzene	12	Mar-07	Mar-07	BRL	5.3
Xylenes-m,p	12	Mar-07	Mar-07	BRL	18.6
Xylene-o	12	Mar-07	Mar-07	---	---
MTBE	12	Mar-07	Mar-07	BRL	34.6
PCE	12	Mar-07	Mar-07	BRL	3.3

Sources: District of Columbia, Department of Health, pers. comm. (2008)

TABLE 2 Detections of Organic Compounds in Groundwater Reported to the District of Columbia Department of Environment (DDOE) by Chevron

	Analyte	Earliest Detection Reported	Most Recent Detection Reported	Number of Detections Reported	Maximum Detection (ug/l)
1	Acetone	Sep-08	Sep-08	16	5,500
2	Benzene	Nov-89	Oct-08	1272	51,000
3	sec-Butylbenzene	Sep-08	Oct-08	5	9.7
4	Carbon Disulfide	Sep-08	Sep-08	2	1.7
5	Chloroform	Sep-08	Oct-08	9	1.7
6	cis-1,2-Dichloroethene	Sep-01	Oct-08	117	60
7	trans-1,2-Dichloroethene	Sep-01	May-02	3	2
8	Ethylbenzene	Nov-89	Oct-08	861	31,000
9	Isopropylbenzene	Sep-08	Oct-08	13	110
10	Methane	May-04	Jun-05	19	5,120
11	Naphthalene	Sep-08	Oct-08	22	1,400
12	n-Propylbenzene	Sep-08	Oct-08	16	400
13	Methyl-t-butyl ether	Dec-92	Oct-08	1981	148,000
14	Tetrachloroethene	Sep-01	Oct-08	1053	14,800
15	Toluene	Nov-89	Oct-08	954	141,000
16	Trichloroethene (Trichloroethylene)	Nov-01	Oct-08	178	60.5
17	1,2,4-Trimethylbenzene	Sep-08	Oct-08	29	3,700
18	1,3,5-Trimethylbenzene	Mar-08	Oct-08	26	1,400
19	Vinyl chloride (Chloroethene)	May-02	Sep-08	2	3.4
20	m,p-Xylene	Sep-08	Oct-08	26	9,500
21	o-Xylene	Jan-02	Oct-08	105	4,700
22	Xylenes, Total	Nov-89	Apr-08	1032	114,000
23	TPH - Diesel Range Organics	Mar-07	Mar-07	1	8,700
24	TPH - Gasoline Range Organics	Sep-01	Oct-08	733	294,000
25	TPH - Oil Range Organics (>C20-C28)	Mar-07	Mar-07	1	160

**TABLE 3 List of Vapor Samples Collected During This Study
(in Chronological Order)**

	Quarter	Week	SampDate	Home ID	Sample Name	Sampling Observation
1	Q1	2	01/24/08	S79	Q1-S79-VMP2	
2	Q1	2	01/24/08	S79	Q1-S79-AOA	
3	Q1	2	01/24/08	S79	Q1-S79-INA	
4	Q1	2	01/24/08	S79	Q1-S79-VMP1	
5	Q1	2	01/24/08	S148	Q1-S148-VMP	
6	Q1	2	01/24/08	S148	Q1-S148-INA	
7	Q1	2	01/24/08	S313	Q1-S313-VMP	
8	Q1	2	01/24/08	S313	Q1-S313-INA	
9	Q1	2	01/24/08	S27	Q1-S27-VMP2	
10	Q1	2	01/24/08	S27	Q1-S27-INA	
11	Q1	2	01/24/08	S27	Q1-S27-VMP1	
12	Q1	2	01/24/08	S220	Q1-S220-AOA	
13	Q1	2	01/24/08	S220	Q1-S220-INA	
14	Q1	2	01/24/08	S220	Q1-S220-VMP	
15	Q1	2	01/24/08	S176	Q1-S176-INA	Can of gasoline removed from basement
16	Q1	2	01/24/08	S176	Q1-S176-VMP1	
17	Q1	2	01/24/08	S176	Q1-S176-VMP2	
18	Q1	3	01/30/08	S311	Q1-S311-AOA	
19	Q1	3	01/30/08	S311	Q1-S311-INA	
20	Q1	3	01/30/08	S311	Q1-S311-VMP	
21	Q1	3	01/30/08	S315	Q1-S315-INA	
22	Q1	3	01/30/08	S315	Q1-S315-VMP	Broken brace on cannister
23	Q1	3	01/30/08	S373	Q1-S373-INA	Missed some mothballs in closet during home survey
24	Q1	3	01/30/08	S373	Q1-S373-VMP	
25	Q1	3	01/30/08	S309	Q1-S309-INA	
26	Q1	3	01/30/08	S194	Q1-S194-INA	
27	Q1	3	01/30/08	S194	Q1-S194-VMP	
28	Q1	3	01/30/08	S4	Q1-S4-INA	
29	Q1	3	01/30/08	S4	Q1-S4-VMP	
30	Q1	3	01/30/08	S167	Q1-S167-INA	
31	Q1	3	01/30/08	S167	Q1-S167-AOA	
32	Q1	3	01/30/08	S73	Q1-S73-INA	Missed some mothballs in basement closet
33	Q1	3	01/30/08	S73	Q1-S73-VMP1	
34	Q1	3	01/30/08	S73	Q1-S73-VMP2	
35	Q1	3	02/01/08	S269	Q1-S269-INA	
36	Q1	3	02/01/08	S269	Q1-S269-VMP	
37	Q1	3	02/01/08	S23	Q1-S23-VMP1	
38	Q1	3	02/01/08	S23	Q1-S23-VMP2	
39	Q1	3	02/01/08	S367	Q1-S367-INA	
40	Q1	3	02/01/08	S367	Q1-S367-VMP	
41	Q1	3	02/01/08	S258	Q1-S258-VMP	
42	Q1	3	02/01/08	S258	Q1-S258-PVMP	
43	Q1	3	02/01/08	S258	Q1-S258-INA	
44	Q1	3	02/01/08	S326	Q1-S326-INA	
45	Q1	3	02/01/08	S326	Q1-S326-VMP	
46	Q1	3	02/01/08	S30	Q1-S30-INA	
47	Q1	3	02/01/08	S30	Q1-S30-PVMP	
48	Q1	3	02/01/08	S30	Q1-S30-VMP	
49	Q1	3	02/01/08	S312	Q1-S312-INA	
50	Q1	3	02/01/08	S312	Q1-S312-VMP	
51	Q1	4	02/06/08	S214	Q1-S214-VMP	Line not purged before sampling
52	Q1	4	02/06/08	S214	Q1-S214-INA	
53	Q1	4	02/06/08	S7	Q1-S7-INA	
54	Q1	4	02/06/08	S7	Q1-S7-VMP	
55	Q1	4	02/06/08	S7	Q1-S7-AOA	
56	Q1	4	02/06/08	S183	Q1-S183-VMP1	
57	Q1	4	02/06/08	S183	Q1-S183-VMP2	
58	Q1	4	02/06/08	S183	Q1-S183-INA	
59	Q1	4	02/06/08	S23	Q1-S23-INA	No indoor air sample collected during first visit- sample collected week of 2/4/08
60	Q1	4	02/06/08	S21	Q1-S21-INA	
61	Q1	4	02/06/08	S21	Q1-S21-VMP1	

	Quarter	Week	SampDate	Home ID	Sample Name	Sampling Observation
349	Q2	19	05/21/08	S234	Q2-S234-GMPR	
350	Q2	19	05/21/08	S56	Q2-S56-GMPR	
351	Q2	19	05/21/08	S56	Q2-S56-AOA	
352	Q2	19	05/21/08	S56	Q2-S56-INA	Home renovated in Spring (Feb-April)
353	Q2	19	05/22/08	S33	Q2-S33-GMPR	
354	Q2	19	05/23/08	S33	Q2-S33-VMP	
355	Q2	19	05/23/08	S33	Q2-S33-PVMP	
356	Q2	19	05/23/08	S107	Q2-S107-GMPR	
357	Q2	19	05/23/08	S287	Q2-S287-GMPR	
358	Q2	19	05/23/08	S144	Q2-S144-GMP	
359	Q2	19	05/23/08	S287	Q2-S287-VMP	
360	Q2	19	05/23/08	S344	Q2-S344-VMP	
361	Q2	19	05/23/08	S199	Q2-S199-GMPR	
362	Q2	19	05/23/08	S240	Q2-S240-GMPR	
363	Q2	19	05/23/08	S240	Q2-S240-VMP1	
364	Q2	19	05/23/08	S240	Q2-S240-VMP2	
365	Q2	20	05/28/08	S37	Q2-S37-VMP	
366	Q2	20	05/28/08	S37	Q2-S37-GMPR	
367	Q2	20	05/28/08	S362	Q2-S362-VMP	
368	Q2	20	05/28/08	S360	Q2-S360-VMP	
369	Q2	20	05/28/08	S354	Q2-S354-VMP	
370	Q2	20	05/28/08	S354	Q2-S354-GMPR	Purged 1 liter
371	Q2	20	05/28/08	S294	Q2-S294-VMP	
372	Q2	20	05/28/08	S54	Q2-S54-VMP	
373	Q2	20	05/28/08	S54	Q2-S54-GMPR1	
374	Q2	20	05/28/08	S54	Q2-S54-GMPR2	Purged 1 liter
375	Q2	20	05/28/08	S294	Q2-S294-GMPR1	
376	Q2	20	05/28/08	S294	Q2-S294-GMPR2	Purged 1 liter
377	Q2	20	05/28/08	S278	Q2-S278-GMPR1	
378	Q2	20	05/28/08	S278	Q2-S278-GMPR2	Purged 1 liter
379	Q2	20	05/28/08	S122	Q2-S122-VMP	
380	Q2	20	05/28/08	S278	Q2-S278-PVMP1	
381	Q2	20	05/28/08	S278	Q2-S278-PVMP2	
382	Q2	20	05/28/08	S278	Q2-S278-VMP	
383	Q2	20	05/29/08	S13	Q2-S13-GMPR	Purged 1 liter
384	Q2	20	05/29/08	S362	Q2-S362-GMPR	
385	Q2	20	05/30/08	S393	Q2-S393-GMPR	
386	Q2	20	05/30/08	S339	Q2-S339-GMPR	
387	Q2	20	05/30/08	S373	Q2-S373-GMPR	
388	Q2	20	05/30/08	S134	Q2-S134-GMPR1	
389	Q2	20	05/30/08	S134	Q2-S134-GMPR2	
390	Q2	20	05/30/08	S311	Q2-S311-GMPR	Purged 1 liter
391	Q2	20	05/30/08	S79	Q2-S79-GMPR	
392	Q2	20	05/30/08	S360	Q2-S360-GMPR	
393	Q2	20	05/30/08	S21	Q2-S21-GMPR1	
394	Q2	20	05/30/08	S21	Q2-S21-GMPR2	Purged 1 liter
395	Q2	20	05/30/08	S30	Q2-S30-GMPR1	
396	Q2	20	05/30/08	S214	Q2-S214-GMPR1	
397	Q2	20	05/30/08	S214	Q2-S214-GMPR2	
398	Q2	20	05/30/08	S220	Q2-S220-GMPR	
399	Q2	21	06/04/08	S289	Q2-S289-VMP	Basement has strong smell of mothballs
400	Q2	21	06/04/08	S194	Q2-S194-INA	
401	Q2	21	06/04/08	S322	Q2-S322-VMP1	
402	Q2	21	06/04/08	S322	Q2-S322-PVMP	
403	Q2	21	06/04/08	S322	Q2-S322-INA	
404	Q2	21	06/04/08	S237	Q2-S237-VMP2	
405	Q2	21	06/04/08	S237	Q2-S237-VMP1	
406	Q2	21	06/04/08	S269	Q2-S269-GMPR	
407	Q2	21	06/04/08	S194	Q2-S194-GMPR	
408	Q2	21	06/04/08	S322	Q2-S322-VMP2	
409	Q2	21	06/04/08	S289	Q2-S289-GMPR	Slow draw rate on canister

**TABLE 3 List of Vapor Samples Collected During This Study
(in Chronological Order)**

	Quarter	Week	SampDate	Home ID	Sample Name	Sampling Observation
62	Q1	4	02/06/08	S21	Q1-S21-VMP2	
63	Q1	4	02/06/08	S301	Q1-S301-INA	
64	Q1	4	02/06/08	S199	Q1-S199-INA	
65	Q1	4	02/06/08	S199	Q1-S199-VMP	
66	Q1	4	02/06/08	S393	Q1-S393-INA	
67	Q1	4	02/07/08	S199	Q1-S199-AOA	
68	Q1	4	02/08/08	S245	Q1-S245-VMP	
69	Q1	4	02/08/08	S245	Q1-S245-INA	
70	Q1	4	02/08/08	S245	Q1-S245-AOA	
71	Q1	4	02/08/08	S339	Q1-S339-VMP1	
72	Q1	4	02/08/08	S339	Q1-S339-VMP2	
73	Q1	4	02/08/08	S339	Q1-S339-INA	
74	Q1	4	02/08/08	S88	Q1-S88-INA	
75	Q1	4	02/08/08	S13	Q1-S13-VMP	
76	Q1	4	02/08/08	S13	Q1-S13-INA	Gas lawnmower in basement, moved outside and locked up for testing
77	Q1	4	02/08/08	S240	Q1-S240-AOA	
78	Q1	4	02/08/08	S240	Q1-S240-VMP1	
79	Q1	4	02/08/08	S240	Q1-S240-INA	
80	Q1	4	02/08/08	S392	Q1-S392-VMP	
81	Q1	4	02/08/08	S392	Q1-S392-INA	
82	Q1	4	02/08/08	S229	Q1-S229-INA	
83	Q1	4	02/08/08	S384	Q1-S384-INA	
84	Q1	4	02/09/08	S229	Q1-S229-VMP	Slow regulator - > 24 hours
85	Q1	4	02/09/08	S88	Q1-S88-VMP	Slow regulator - > 24 hours
86	Q1	5	02/13/08	S57	Q1-S57-VMP1	
87	Q1	5	02/13/08	S57	Q1-S57-VMP2	
88	Q1	5	02/13/08	S57	Q1-S57-INA	
89	Q1	5	02/13/08	S59	Q1-S59-VMP	
90	Q1	5	02/13/08	S59	Q1-S59-INA	
91	Q1	5	02/13/08	S48	Q1-S48-INA	
92	Q1	5	02/13/08	S48	Q1-S48-VMP	
93	Q1	5	02/13/08	S380	Q1-S380-VMP	
94	Q1	5	02/13/08	S380	Q1-S380-INA	
95	Q1	5	02/13/08	S240	Q1-S240-VMP2	VMP2 not sampled during first visit - sampled following week (2/12/08)
96	Q1	5	02/13/08	S305	Q1-S305-VMP	Some water vapor in VMP tubing
97	Q1	5	02/13/08	S305	Q1-S305-INA	Unidentified odor in basement
98	Q1	5	02/13/08	S294	Q1-S294-INA	
99	Q1	5	02/13/08	S294	Q1-S294-AOA	
100	Q1	5	02/13/08	S294	Q1-S294-VMP	
101	Q1	5	02/13/08	S354	Q1-S354-VMP	
102	Q1	5	02/13/08	S354	Q1-S354-INA	
103	Q1	5	02/13/08	S241	Q1-S241-INA	
104	Q1	5	02/13/08	S241	Q1-S241-VMP1	
105	Q1	5	02/13/08	S241	Q1-S241-VMP2	
106	Q1	5	02/13/08	S241	Q1-S241-AOA	
107	Q1	5	02/15/08	S234	Q1-S234-INA	
108	Q1	5	02/15/08	S234	Q1-S234-VMP	
109	Q1	5	02/15/08	S41	Q1-S41-INA	
110	Q1	5	02/15/08	S41	Q1-S41-VMP	
111	Q1	5	02/15/08	S41	Q1-S41-AOA	
112	Q1	5	02/15/08	S144	Q1-S144-VMP	Slow regulator - > 24 hours
113	Q1	5	02/15/08	S225	Q1-S225-INA	
114	Q1	5	02/15/08	S225	Q1-S225-VMP	
115	Q1	5	02/15/08	S200	Q1-S200-VMP1	
116	Q1	5	02/15/08	S200	Q1-S200-VMP2	
117	Q1	5	02/15/08	S347	Q1-S347-INA	Slow regulator - > 24 hours
118	Q1	5	02/15/08	S144	Q1-S144-INA	
119	Q1	5	02/15/08	S239	Q1-S239-INA	Mot home for appointment, week of 2/4/08; obtained week of 2/13
120	Q1	5	02/15/08	S239	Q1-S239-VMP	
410	Q2	21	06/04/08	S301	Q2-S301-GMPR	
411	Q2	21	06/04/08	S269	Q2-S269-VMP	
412	Q2	21	06/04/08	S269	Q2-S269-INA	
413	Q2	21	06/04/08	S70	Q2-S70-GMPR	
414	Q2	21	06/04/08	S73	Q2-S73-AOA	
415	Q2	21	06/04/08	S73	Q2-S73-INA	
416	Q2	21	06/05/08	S30	Q2-S30-GMPR2	Slow draw rate on canister; left for 24 hours
417	Q2	22	06/11/08	S267	Q2-S267-VMP	
418	Q2	22	06/11/08	S254	Q2-S254-VMP	
419	Q2	22	06/11/08	S48	Q2-S48-GMP	Slow regulator, left more than 24 hours
420	Q2	22	06/11/08	S23	Q2-S23-VMP1	
421	Q2	22	06/11/08	S23	Q2-S23-VMP2	
422	Q2	22	06/11/08	S52	Q2-S52-INA	Roof repaired in May
423	Q2	22	06/11/08	S52	Q2-S52-VMP	
424	Q2	22	06/11/08	S313	Q2-S313-VMP	
425	Q2	22	06/11/08	S313	Q2-S313-INA	
426	Q2	22	06/11/08	S313	Q2-S313-AOA	
427	Q2	22	06/11/08	S313	Q2-S313-GMPR	
428	Q2	22	06/11/08	S326	Q2-S326-GMPR	
429	Q2	22	06/11/08	S326	Q2-S326-VMP_R	
430	Q2	22	06/11/08	S326	Q2-S326-INA	
431	Q2	22	06/11/08	S176	Q2-S176-VMP2	
432	Q2	22	06/11/08	S176	Q2-S176-INA	
433	Q2	22	06/11/08	S176	Q2-S176-VMP1	
434	Q2	22	06/11/08	S176	Q2-S176-GMPR1	
435	Q2	22	06/11/08	S176	Q2-S176-GMPR2	
436	Q2	22	06/11/08	S176	Q2-S176-GMPR3	Purged 1 liter
437	Q2	22	06/12/08	S7	Q2-S7-GMPR	Purged 1 liter
438	Q2	22	06/12/08	S167	Q2-S167-GMPR	Purged 1 liter
439	Q2	22	06/12/08	S384	Q2-S384-GMPR	Purged 1 liter
440	Q2	22	06/12/08	S381	Q2-S381-GMPR	Purged 1 liter
441	Q2	22	06/12/08	S309	Q2-S309-GMPR	
442	Q2	22	06/13/08	S121	Q2-S121-VMP	
443	Q2	22	06/13/08	S239	Q2-S239-VMP	
444	Q2	22	06/13/08	S395	Q2-S395-GMP	
445	Q2	22	06/13/08	S395	Q2-S395-VMP	
446	Q2	22	06/13/08	S59	Q2-S59-VMP	
447	Q2	22	06/13/08	S120	Q2-S120-VMP	
448	Q2	22	06/13/08	S120	Q2-S120-GMPR1	
449	Q2	22	06/13/08	S120	Q2-S120-GMPR2	
450	Q2	22	06/13/08	S45	Q2-S45-VMP	
451	Q2	22	06/13/08	S239	Q2-S239-GMPR	Purged 1 liter; rainbow colors in tedlar bag from purging; sample was slow to fill canister
452	Q2	23	06/18/08	S72	Q2-S72-VMP	
453	Q2	23	06/18/08	S17	Q2-S17-VMP	Home renovations ongoing on 1st floor; hairdressing in basement
454	Q2	23	06/18/08	S140	Q2-S140-VMP	
455	Q2	23	06/18/08	S394	Q2-S394-VMP1	
456	Q2	23	06/18/08	S394	Q2-S394-VMP2	
457	Q2	23	06/18/08	S4	Q2-S4-VMP	
458	Q2	23	06/19/08	S293	Q2-S293-GMP	
459	Q2	23	06/19/08	S254	Q2-S254-GMPR	
460	Q2	23	06/20/08	S416	Q2-S416-VMP	
461	Q2	23	06/20/08	S347	Q2-S347-VMP1	
462	Q2	23	06/20/08	S347	Q2-S347-VMP2	
463	Q2	23	06/20/08	S347	Q2-S347-GMPR2	Purged 1 liter
464	Q2	23	06/20/08	S96	Q2-S96-VMP	
465	Q2	23	06/20/08	S96	Q2-S96-GMP	
466	Q2	23	06/20/08	S390	Q2-S390-GMPR	
467	Q2	23	06/20/08	S390	Q2-S390-VMP	
468	Q2	23	06/20/08	S250	Q2-S250-VMP1	

**TABLE 3 List of Vapor Samples Collected During This Study
(in Chronological Order)**

	Quarter	Week	SampDate	Home ID	Sample Name	Sampling Observation
121	Q1	5	02/15/08	S347	Q1-S347-VMP1	Slow regulator - > 24 hours
122	Q1	5	02/15/08	S347	Q1-S347-VMP2	Slow regulator - > 24 hours
123	Q1	5	02/15/08	S347	Q1-S347-AOA	
124	Q1	6	02/20/08	S200	Q1-S200-INA	
125	Q1	6	02/21/08	S36	Q1-S36-INA	
126	Q1	6	02/21/08	S36	Q1-S36-VMP	
127	Q1	6	02/21/08	S134	Q1-S134-VMP2	Difficulty purging VMP2, dust filled 2 hand pumps
128	Q1	6	02/21/08	S134	Q1-S134-VMP1	
129	Q1	6	02/21/08	S134	Q1-S134-INA	
130	Q1	6	02/21/08	S322	Q1-S322-INA	
131	Q1	6	02/21/08	S322	Q1-S322-PVMP	
132	Q1	6	02/21/08	S254	Q1-S254-INA	Faint smell of gas in home when placing cannister
133	Q1	6	02/21/08	S254	Q1-S254-VMP	
134	Q1	6	02/21/08	S278	Q1-S278-INA	Autmotive equipment in home
135	Q1	6	02/21/08	S278	Q1-S278-VMP	
136	Q1	6	02/21/08	S278	Q1-S278-PVMP2	
137	Q1	6	02/21/08	S278	Q1-S278-PVMP1	
138	Q1	6	02/21/08	S37	Q1-S37-INA	Slow regulator - > 24 hours
139	Q1	6	02/21/08	S426	Q1-S426-VMP	
140	Q1	6	02/21/08	S426	Q1-S426-AOA	
141	Q1	6	02/21/08	S426	Q1-S426-INA	
142	Q1	6	02/21/08	S360	Q1-S360-AOA	
143	Q1	6	02/21/08	S360	Q1-S360-VMP	
144	Q1	6	02/21/08	S360	Q1-S360-INA	
145	Q1	6	02/22/08	S322	Q1-S322-VMP2	VMP2-high vacuum left on cannister after 24 hours, left in place > 24 hours
146	Q1	7	02/25/08	S37	Q1-S37-VMP	VMP slow to fill; left in place >24 hours
147	Q1	7	02/27/08	S419	Q1-S419-INA	Some hobby paints remained in basement in sealed bags due to homeoner concerns
148	Q1	7	02/27/08	S419	Q1-S419-VMP	
149	Q1	7	02/27/08	S419	Q1-S419-AOA	
150	Q1	7	02/27/08	S130	Q1-S130-VMP1	
151	Q1	7	02/27/08	S130	Q1-S130-INA	
152	Q1	7	02/27/08	S130	Q1-S130-VMP2	
153	Q1	7	02/27/08	S293	Q1-S293-INA	
154	Q1	7	02/27/08	S293	Q1-S293-VMP1	
155	Q1	7	02/27/08	S69	Q1-S69-VMP	
156	Q1	7	02/27/08	S122	Q1-S122-VMP	
157	Q1	7	02/27/08	S107	Q1-S107-VMP	
158	Q1	7	02/27/08	S107	Q1-S107-INA	
159	Q1	7	02/27/08	S54	Q1-S54-INA	Additional box of mothballs found during sample setup, removed
160	Q1	7	02/27/08	S54	Q1-S54-VMP	
161	Q1	7	02/28/08	S130	Q1-S130-AOA	
162	Q1	7	02/28/08	S293	Q1-S293-VMP2	Difficulty purging VMP2 for 2 full liters
163	Q1	7	02/29/08	S362	Q1-S362-INA	
164	Q1	7	02/29/08	S362	Q1-S362-VMP	
165	Q1	7	02/29/08	S362	Q1-S362-AOA	
166	Q1	7	02/29/08	S8	Q1-S8-INA	
167	Q1	7	02/29/08	S8	Q1-S8-VMP	
168	Q1	7	02/29/08	S8	Q1-S8-AOA	
169	Q1	7	02/29/08	S69	Q1-S69-INA	
170	Q1	7	02/29/08	S237	Q1-S237-INA	
171	Q1	7	02/29/08	S237	Q1-S237-VMP1	
172	Q1	7	02/29/08	S237	Q1-S237-VMP2	
173	Q1	7	02/29/08	S138	Q1-S138-INA	
174	Q1	7	02/29/08	S138	Q1-S138-VMP	
175	Q1	7	02/29/08	S122	Q1-S122-INA	
176	Q1	7	02/29/08	S70	Q1-S70-INA	
177	Q1	7	02/29/08	S322	Q1-S322-VMP1	Slow regulator - > 24 hours
178	Q1	7	02/29/08	S95	Q1-S95-INA	
179	Q1	7	02/29/08	S95	Q1-S95-VMP	
180	Q1	8	03/05/08	S238	Q1-S238-AOA	

	Quarter	Week	SampDate	Home ID	Sample Name	Sampling Observation
469	Q2	23	06/20/08	S250	Q2-S250-VMP2	
470	Q2	23	06/20/08	S296	Q2-S296-GMP	
471	Q2	23	06/20/08	S296	Q2-S296-VMP	
472	Q2	24	06/25/08	S257	Q2-S257-VMP	
473	Q2	24	06/25/08	S416	Q2-S416-GMPR	
474	Q2	24	06/25/08	S257	Q2-S257-GMPR	Purged 1 liter
475	Q2	24	06/25/08	S130	Q2-S130-VMP1	
476	Q2	24	06/25/08	S130	Q2-S130-VMP2	
477	Q2	24	06/25/08	S130	Q2-S130-GMPR2	Purged 1 liter
478	Q2	24	06/25/08	S132	Q2-S132-VMP	
479	Q2	24	06/25/08	S335	Q2-S335-GMPR	
480	Q2	24	06/25/08	S280	Q2-S280-VMPR	
481	Q2	24	06/25/08	S347	Q2-S347-GMPR1	
482	Q2	24	06/25/08	S325	Q2-S325-AOA	
483	Q2	24	06/25/08	S325	Q2-S325-INA	
484	Q2	24	06/25/08	S325	Q2-S325-VMP	
485	Q2	24	06/27/08	S335	Q2-S335-VMP	Basement flooded on day before sampling
486	Q2	24	06/27/08	S77	Q2-S77-GMP	Grab Sample - regulator failed
487	Q2	24	06/27/08	S341	Q2-S341-VMP	
488	Q3	27	07/16/08	S36	Q3-S36-VMP	
489	Q3	27	07/16/08	S312	Q3-S312-VMP	
490	Q3	27	07/16/08	S312	Q3-S312-GMPR	Purged 1 liter
491	Q3	27	07/16/08	S315	Q3-S315-VMP	
492	Q3	27	07/16/08	S56	Q3-S56-GMPR	
493	Q3	27	07/16/08	S138	Q3-S138-VMP	Nail polish remover being used in basement prior to canister installatoin
494	Q3	27	07/16/08	S276	Q3-S276-VMP	
495	Q3	27	07/16/08	S402	Q3-S402-VMP	
496	Q3	27	07/16/08	S241	Q3-S241-VMP1	
497	Q3	27	07/16/08	S241	Q3-S241-VMP2	
498	Q3	27	07/18/08	S88	Q3-S88-VMP	
499	Q3	27	07/18/08	S380	Q3-S380-VMP	
500	Q3	27	07/18/08	S187	Q3-S187-VMP	
501	Q3	27	07/18/08	S187	Q3-S187-GMPR	Purged 1 liter
502	Q3	27	07/18/08	S41	Q3-S41-VMP	
503	Q3	27	07/18/08	S200	Q3-S200-VMP1	
504	Q3	27	07/18/08	S200	Q3-S200-VMP2	
505	Q3	27	07/18/08	S69	Q3-S69-VMP	
506	Q3	27	07/18/08	S305	Q3-S305-VMP	
507	Q3	27	07/18/08	S95	Q3-S95-VMP	
508	Q3	28	07/23/08	S57	Q3-S57-VMP1	
509	Q3	28	07/23/08	S57	Q3-S57-VMP2	
510	Q3	28	07/23/08	S234	Q3-S234-VMP	
511	Q3	28	07/23/08	S213	Q3-S213-VMP	Noted a few drops of wet mud in tubing during purging
512	Q3	28	07/23/08	S426	Q3-S426-VMP	
513	Q3	28	07/23/08	S234	Q3-S234-GMPR	
514	Q3	28	07/23/08	S344	Q3-S344-VMP	
515	Q3	28	07/23/08	S107	Q3-S107-VMP	
516	Q3	28	07/23/08	S107	Q3-S107-GMPR	
517	Q3	28	07/23/08	S199	Q3-S199-GMPR	
518	Q3	28	07/23/08	S144	Q3-S144-GMPR	
519	Q3	28	07/23/08	S199	Q3-S199-VMP	
520	Q3	28	07/25/08	S33	Q3-S33-VMP	
521	Q3	28	07/25/08	S33	Q3-S33-PVMP	
522	Q3	28	07/25/08	S33	Q3-S33-GMPR	
523	Q3	28	07/25/08	S393	Q3-S393-GMPR	
524	Q3	28	07/25/08	S75	Q3-S75-VMP	
525	Q3	28	07/25/08	S311	Q3-S311-VMP	Stairway in basement freshly painted
526	Q3	28	07/25/08	S311	Q3-S311-GMPR	
527	Q3	28	07/25/08	S183	Q3-S183-VMP1	
528	Q3	28	07/25/08	S183	Q3-S183-VMP2	

**TABLE 3 List of Vapor Samples Collected During This Study
(in Chronological Order)**

	Quarter	Week	SampDate	Home ID	Sample Name	Sampling Observation
181	Q1	8	03/05/08	S238	Q1-S238-INA	
182	Q1	8	03/05/08	S238	Q1-S238-VMP	Collected after heavy rain
183	Q1	8	03/05/08	S289	Q1-S289-AOA	
184	Q1	8	03/05/08	S289	Q1-S289-INA	Smell of mothballs in home
185	Q1	8	03/05/08	S280	Q1-S280-INA	Additional can of paint found during sample setup, removed
186	Q1	8	03/05/08	S280	Q1-S280-VMP	
187	Q1	8	03/05/08	S401	Q1-S401-VMP	
188	Q1	8	03/05/08	S401	Q1-S401-INA	
189	Q1	8	03/05/08	S270	Q1-S270-INA	Basement currently being re-modeled
190	Q1	8	03/05/08	S270	Q1-S270-VMP	
191	Q1	8	03/06/08	S289	Q1-S289-VMP	
192	Q1	8	03/07/08	S140	Q1-S140-INA	Indoor Air duplicate - difficulty with regulators; sample collected eventually
193	Q1	8	03/07/08	S203	Q1-S203-VMP2	
194	Q1	8	03/07/08	S203	Q1-S203-INA	
195	Q1	8	03/07/08	S203	Q1-S203-VMP1	
196	Q1	8	03/07/08	S211	Q1-S211-AOA	
197	Q1	8	03/07/08	S203	Q1-S203-AOA	
198	Q1	8	03/08/08	S140	Q1-S140-VMP	Needed to re-do sample because of bad regulator
199	Q1	9	03/11/08	S211	Q1-S211-INA	
200	Q1	9	03/11/08	S211	Q1-S211-VMP	
201	Q1	9	03/12/08	S120	Q1-S120-INA	
202	Q1	9	03/12/08	S120	Q1-S120-VMP	
203	Q1	9	03/12/08	S33	Q1-S33-INA	
204	Q1	9	03/12/08	S33	Q1-S33-VMP	
205	Q1	9	03/12/08	S33	Q1-S33-PVMP	PVMP tubing badly kinked, PVMP sample could reflect if tubing compromised
206	Q1	9	03/12/08	S33	Q1-S33-AOA	
207	Q1	9	03/12/08	S187	Q1-S187-INA	
208	Q1	9	03/12/08	S187	Q1-S187-VMP	
209	Q1	9	03/12/08	S287	Q1-S287-VMP	Active renovation in progress; tubing to VMP kinked after placement
210	Q1	9	03/12/08	S287	Q1-S287-INA	
211	Q1	9	03/12/08	S390	Q1-S390-AOA	
212	Q1	9	03/12/08	S390	Q1-S390-INA	
213	Q1	9	03/12/08	S390	Q1-S390-VMP	
214	Q1	9	03/13/08	S416	Q1-S416-INA	
215	Q1	9	03/13/08	S416	Q1-S416-VMP	
216	Q1	9	03/14/08	S213	Q1-S213-VMP1	
217	Q1	9	03/14/08	S213	Q1-S213-INA	
218	Q1	9	03/14/08	S358	Q1-S358-INA	
219	Q1	9	03/14/08	S344	Q1-S344-INA	
220	Q1	9	03/14/08	S344	Q1-S344-VMP	
221	Q1	9	03/14/08	S344	Q1-S344-AOA	
222	Q1	9	03/14/08	S276	Q1-S276-AOA	
223	Q1	9	03/14/08	S276	Q1-S276-VMP	
224	Q1	9	03/14/08	S276	Q1-S276-INA	
225	Q1	9	03/14/08	S335	Q1-S335-INA	
226	Q1	9	03/14/08	S335	Q1-S335-VMP	
227	Q1	9	03/14/08	S17	Q1-S17-INA	Remodeling in past 3 months
228	Q1	9	03/14/08	S17	Q1-S17-VMP	
229	Q1	9	03/14/08	S296	Q1-S296-VMP	
230	Q1	9	03/14/08	S296	Q1-S296-INA	
231	Q1	10	03/19/08	S96	Q1-S96-INA	
232	Q1	10	03/19/08	S96	Q1-S96-VMP	
233	Q1	10	03/19/08	S96	Q1-S96-AOA	
234	Q1	10	03/19/08	S257	Q1-S257-VMP	
235	Q1	10	03/19/08	S257	Q1-S257-INA	
236	Q1	10	03/19/08	S267	Q1-S267-INA	
237	Q1	10	03/19/08	S267	Q1-S267-VMP	
238	Q1	10	03/19/08	S267	Q1-S267-AOA	
239	Q1	10	03/19/08	S402	Q1-S402-VMP	
240	Q1	10	03/19/08	S402	Q1-S402-INA	
529	Q3	28	07/25/08	S27	Q3-S27-GMPR	
530	Q3	28	07/25/08	S362	Q3-S362-GMPR	Purged 1 liter
531	Q3	28	07/25/08	S27	Q3-S27-VMP2	
532	Q3	28	07/25/08	S27	Q3-S27-VMP1	
533	Q3	28	07/25/08	S362	Q3-S362-VMP	
534	Q3	28	07/25/08	S143	Q3-S143-VMP2	
535	Q3	28	07/25/08	S143	Q3-S143-VMP1	
536	Q3	29	07/30/08	S79	Q3-S79-VMP1	
537	Q3	29	07/30/08	S79	Q3-S79-VMP2	
538	Q3	29	07/30/08	S79	Q3-S79-GMPR	
539	Q3	29	07/30/08	S283	Q3-S283-PVMP2	
540	Q3	29	07/30/08	S283	Q3-S283-PVMP1	
541	Q3	29	07/30/08	S238	Q3-S238-VMP	
542	Q3	29	07/30/08	S229	Q3-S229-VMP	
543	Q3	29	07/30/08	S373	Q3-S373-GMPR	
544	Q3	29	07/30/08	S7	Q3-S7-GMPR	
545	Q3	29	07/30/08	S373	Q3-S373-VMP	
546	Q3	29	07/30/08	S7	Q3-S7-VMP	
547	Q3	29	07/30/08	S134	Q3-S134-GMPR1	
548	Q3	29	07/30/08	S134	Q3-S134-GMPR2	
549	Q3	29	07/30/08	S13	Q3-S13-GMP	
550	Q3	29	07/30/08	S13	Q3-S13-VMP	
551	Q3	29	07/30/08	S134	Q3-S134-VMP1	Possible gasoline leak observed in basement near VMP1
552	Q3	29	07/30/08	S134	Q3-S134-VMP2	Limited purging due to dust from VMP
553	Q3	29	08/01/08	S214	Q3-S214-VMP	
554	Q3	29	08/01/08	S214	Q3-S214-GMPR1	
555	Q3	29	08/01/08	S214	Q3-S214-GMPR2	
556	Q3	29	08/01/08	S278	Q3-S278-PVMP1	
557	Q3	29	08/01/08	S278	Q3-S278-VMP	
558	Q3	29	08/01/08	S278	Q3-S278-PVMP2	Mis-labeled as PVMP4 on COC and Field Sheets
559	Q3	29	08/01/08	S278	Q3-S278-GMPR1	
560	Q3	29	08/01/08	S278	Q3-S278-GMPR2	Purged 1 liter
561	Q3	29	08/01/08	S237	Q3-S237-VMP2	
562	Q3	29	08/01/08	S237	Q3-S237-VMP1	
563	Q3	29	08/01/08	S70	Q3-S70-GMPR	Purged 1 liter
564	Q3	29	08/01/08	S313	Q3-S313-GMPR	
565	Q3	29	08/01/08	S313	Q3-S313-VMP	
566	Q3	29	08/01/08	S73	Q3-S73-VMP2	
567	Q3	29	08/01/08	S73	Q3-S73-VMP1	Purged 1/2 liter
568	Q3	29	08/01/08	S384	Q3-S384-GMPR	
569	Q3	30	08/06/08	S326	Q3-S326-VMP	
570	Q3	30	08/06/08	S326	Q3-S326-GMPR	
571	Q3	30	08/06/08	S289	Q3-S289-VMP	
572	Q3	30	08/06/08	S289	Q3-S289-GMPR	
573	Q3	30	08/06/08	S176	Q3-S176-VMP2	
574	Q3	30	08/06/08	S176	Q3-S176-VMP1	
575	Q3	30	08/06/08	S176	Q3-S176-GMPR1	
576	Q3	30	08/06/08	S176	Q3-S176-GMPR2	
577	Q3	30	08/06/08	S23	Q3-S23-VMP2	
578	Q3	30	08/06/08	S23	Q3-S23-VMP1	
579	Q3	30	08/06/08	S59	Q3-S59-VMP	
580	Q3	30	08/06/08	S8	Q3-S8-VMP	
581	Q3	30	08/06/08	S167	Q3-S167-GMPR	Sampled after re-installed due to pulled tubing
582	Q3	30	08/06/08	S240	Q3-S240-GMPR	
583	Q3	30	08/06/08	S211	Q3-S211-VMP	
584	Q3	30	08/06/08	S240	Q3-S240-VMP2	
585	Q3	30	08/06/08	S240	Q3-S240-VMP1	
586	Q3	30	08/07/08	S176	Q3-S176-GMPR3	Purged 1 liter
587	Q3	30	08/08/08	S322	Q3-S322-VMP2	
588	Q3	30	08/08/08	S322	Q3-S322-VMP1	

**TABLE 3 List of Vapor Samples Collected During This Study
(in Chronological Order)**

	Quarter	Week	SampDate	Home ID	Sample Name	Sampling Observation
241	Q1	10	03/19/08	S395	Q1-S395-VMP	
242	Q1	10	03/19/08	S395	Q1-S395-INA	
243	Q1	10	03/19/08	S75	Q1-S75-VMP	
244	Q1	10	03/19/08	S75	Q1-S75-INA	
245	Q1	10	03/19/08	S389	Q1-S389-INA	
246	Q1	11	03/28/08	S143	Q1-S143-INA	
247	Q1	11	03/28/08	S143	Q1-S143-VMP1	
248	Q1	11	03/28/08	S143	Q1-S143-VMP2	
249	Q1	11	03/28/08	S143	Q1-S143-AOA	
250	Q1	11	03/28/08	S394	Q1-S394-INA	Some paints left indoors, owner refused to allow removal
251	Q1	11	03/28/08	S394	Q1-S394-VMP1	
252	Q1	11	03/28/08	S394	Q1-S394-VMP2	
253	Q1	11	03/28/08	S341	Q1-S341-INA	
254	Q1	11	03/28/08	S341	Q1-S341-VMP	
255	Q1	11	03/28/08	S121	Q1-S121-INA	
256	Q1	11	03/28/08	S121	Q1-S121-VMP	
257	Q1	11	03/28/08	S342	Q1-S342-VMP	
258	Q1	11	03/28/08	S342	Q1-S342-INA	
259	Q1	11	03/29/08	S121	Q1-S121-AOA	
260	Q1	12	04/04/08	S132	Q1-S132-VMP	
261	Q1	12	04/04/08	S132	Q1-S132-INA	
262	Q1	12	04/04/08	S132	Q1-S132-AOA	
263	Q1	12	04/04/08	S45	Q1-S45-AOA	
264	Q1	12	04/04/08	S45	Q1-S45-INA	
265	Q1	12	04/04/08	S45	Q1-S45-VMP	
266	Q1	12	04/04/08	S77	Q1-S77-INA	20-hour regulator
267	Q1	12	04/04/08	S72	Q1-S72-INA1	
268	Q1	12	04/05/08	S72	Q1-S72-VMP	
269	Q1	12	04/05/08	S72	Q1-S72-INA2	Re-sample of indoor air coincident with sub-slab
270	Q2	14	04/16/08	S79	Q2-S79-VMP2	
271	Q2	14	04/16/08	S339	Q2-S339-VMP1	
272	Q2	14	04/16/08	S339	Q2-S339-VMP2	
273	Q2	14	04/16/08	S373	Q2-S373-VMP	
274	Q2	14	04/16/08	S326	Q2-S326-VMP	
275	Q2	14	04/16/08	S315	Q2-S315-VMP	
276	Q2	14	04/16/08	S13	Q2-S13-VMP	
277	Q2	14	04/16/08	S311	Q2-S311-VMP	
278	Q2	14	04/16/08	S73	Q2-S73-VMP2	
279	Q2	14	04/16/08	S73	Q2-S73-VMP1	
280	Q2	14	04/17/08	S79	Q2-S79-VMP1	Slow regulator, left more than 24 hours
281	Q2	14	04/18/08	S199	Q2-S199-VMP	
282	Q2	14	04/18/08	S214	Q2-S214-VMP	
283	Q2	14	04/18/08	S183	Q2-S183-VMP2	
284	Q2	14	04/18/08	S183	Q2-S183-VMP1	
285	Q2	14	04/18/08	S426	Q2-S426-VMP	
286	Q2	14	04/18/08	S134	Q2-S134-VMP2	
287	Q2	14	04/18/08	S134	Q2-S134-VMP1	Purged 0.25 liters
288	Q2	14	04/18/08	S138	Q2-S138-VMP	
289	Q2	14	04/18/08	S229	Q2-S229-VMP	
290	Q2	15	04/23/08	S7	Q2-S7-VMP	
291	Q2	15	04/23/08	S283	Q2-S283-AOA	Strong smell of fertilizer
292	Q2	15	04/23/08	S194	Q2-S194-VMP	
293	Q2	15	04/23/08	S283	Q2-S283-PVMP2	
294	Q2	15	04/23/08	S188	Q2-S188-INA	
295	Q2	15	04/23/08	S188	Q2-S188-VMP	
296	Q2	15	04/23/08	S283	Q2-S283-INA	
297	Q2	15	04/23/08	S283	Q2-S283-PVMP1	
298	Q2	15	04/23/08	S220	Q2-S220-VMP	
299	Q2	15	04/23/08	S21	Q2-S21-VMP2	
300	Q2	15	04/23/08	S21	Q2-S21-VMP1	
301	Q2	15	04/23/08	S88	Q2-S88-VMP	
302	Q2	15	04/23/08	S30	Q2-S30-INA	Water heater exploded and basement flooded 2 weeks earlier

	Quarter	Week	SampDate	Home ID	Sample Name	Sampling Observation
589	Q3	30	08/08/08	S322	Q3-S322-PVMP	
590	Q3	30	08/08/08	S322	Q3-S322-GMPR1	Purged 1 liter
591	Q3	30	08/08/08	S45	Q3-S45-VMP	
592	Q3	30	08/08/08	S267	Q3-S267-VMP	
593	Q3	30	08/08/08	S269	Q3-S269-VMP	
594	Q3	30	08/08/08	S269	Q3-S269-GMPR	
595	Q3	30	08/08/08	S309	Q3-S309-GMPR	Purged 1 liter
596	Q3	30	08/08/08	S322	Q3-S322-GMPR2	Slow regulator
597	Q3	30	08/08/08	S239	Q3-S239-VMP	
598	Q3	30	08/08/08	S239	Q3-S239-GMPR	
599	Q3	30	08/08/08	S120	Q3-S120-VMP	
600	Q3	30	08/08/08	S120	Q3-S120-GMPR1	
601	Q3	30	08/08/08	S120	Q3-S120-GMPR2	Purged 1 liter
602	Q3	30	08/08/08	S301	Q3-S301-GMPR	
603	Q3	30	08/08/08	S381	Q3-S381-GMPR	Purged 1 liter
604	Q3	31	08/13/08	S52	Q3-S52-VMP	
605	Q3	31	08/13/08	S54	Q3-S54-VMP	
606	Q3	31	08/13/08	S54	Q3-S54-GMPR1	
607	Q3	31	08/13/08	S54	Q3-S54-GMPR2	Purged 1 liter
608	Q3	31	08/13/08	S293	Q3-S293-VMP2	
609	Q3	31	08/13/08	S293	Q3-S293-VMP1	
610	Q3	31	08/13/08	S293	Q3-S293-GMP	
611	Q3	31	08/13/08	S37	Q3-S37-VMP	
612	Q3	31	08/13/08	S37	Q3-S37-GMPR	
613	Q3	31	08/13/08	S72	Q3-S72-VMP	
614	Q3	31	08/13/08	S250	Q3-S250-VMP1	
615	Q3	31	08/13/08	S250	Q3-S250-VMP2	
616	Q3	32	08/20/08	S245	Q3-S245-VMP	
617	Q3	32	08/20/08	S121	Q3-S121-VMP	
618	Q3	32	08/20/08	S335	Q3-S335-GMPR	
619	Q3	32	08/20/08	S150	Q3-S150-VMP	
620	Q3	32	08/20/08	S335	Q3-S335-VMP	
621	Q3	32	08/20/08	S200	Q3-S200-GMPRR	
622	Q3	32	08/20/08	S36	Q3-S36-GMPRR	
623	Q3	32	08/20/08	S194	Q3-S194-VMP	
624	Q3	32	08/20/08	S367	Q3-S367-GMPRR	
625	Q3	32	08/22/08	S96	Q3-S96-VMP	
626	Q3	32	08/22/08	S96	Q3-S96-GMP	
627	Q3	32	08/22/08	S30	Q3-S30-PVMP	
628	Q3	32	08/22/08	S30	Q3-S30-VMP	
629	Q3	32	08/22/08	S30	Q3-S30-GMPR1	
630	Q3	32	08/22/08	S30	Q3-S30-GMPR2	
631	Q3	32	08/22/08	S254	Q3-S254-VMP	
632	Q3	32	08/22/08	S254	Q3-S254-GMP	
633	Q3	32	08/22/08	S194	Q3-S194-GMPR	Slow to Fill - Tight soil
634	Q3	32	08/22/08	S21	Q3-S21-GMPR2	Purged 1 liter
635	Q3	32	08/22/08	S21	Q3-S21-GMPR1	
636	Q3	32	08/22/08	S21	Q3-S21-VMP1	
637	Q3	32	08/22/08	S21	Q3-S21-VMP2	
638	Q3	32	08/22/08	S132	Q3-S132-VMP	
639	Q3	32	08/22/08	S48	Q3-S48-VMP	
640	Q3	32	08/22/08	S48	Q3-S48-GMP	
641	Q3	32	08/22/08	S389	Q3-S389-GMPRR	Purged 1 liter
642	Q3	32	08/22/08	S401	Q3-S401-VMP	
643	Q3	33	08/27/08	S416	Q3-S416-VMP	
644	Q3	33	08/27/08	S416	Q3-S416-GMPR	
645	Q3	33	08/27/08	S339	Q3-S339-GMPR	
646	Q3	33	08/27/08	S339	Q3-S339-VMP1	
647	Q3	33	08/27/08	S339	Q3-S339-VMP2	
648	Q3	33	08/27/08	S280	Q3-S280-VMP	
649	Q3	33	08/27/08	S77	Q3-S77-GMPR	
650	Q3	33	08/27/08	S358	Q3-S358-GMPRR	

**TABLE 3 List of Vapor Samples Collected During This Study
(in Chronological Order)**

	Quarter	Week	SampDate	Home ID	Sample Name	Sampling Observation
303	Q2	15	04/23/08	S30	Q2-S30-VMP	
304	Q2	15	04/23/08	S30	Q2-S30-PVMP	
305	Q2	15	04/25/08	S107	Q2-S107-VMP	
306	Q2	15	04/25/08	S48	Q2-S48-VMP	
307	Q2	15	04/25/08	S225	Q2-S225-VMP	
308	Q2	15	04/25/08	S8	Q2-S8-VMP	
309	Q2	15	04/25/08	S241	Q2-S241-VMP1	
310	Q2	15	04/25/08	S241	Q2-S241-VMP2	
311	Q2	16	04/30/08	S57	Q2-S57-VMP1	
312	Q2	16	04/30/08	S57	Q2-S57-VMP2	
313	Q2	16	04/30/08	S95	Q2-S95-VMP	
314	Q2	16	05/02/08	S380	Q2-S380-VMP	
315	Q2	16	05/02/08	S69	Q2-S69-VMP	
316	Q2	16	05/02/08	S41	Q2-S41-VMP	
317	Q2	16	05/02/08	S305	Q2-S305-VMP	
318	Q2	16	05/02/08	S238	Q2-S238-VMP	
319	Q2	16	05/02/08	S276	Q2-S276-VMP	
320	Q2	16	05/02/08	S401	Q2-S401-VMP	
321	Q2	17	05/07/08	S213	Q2-S213-VMP1	Some moisture in tubing during purging
322	Q2	17	05/07/08	S402	Q2-S402-VMP	
323	Q2	17	05/09/08	S245	Q2-S245-VMP	
324	Q2	17	05/09/08	S75	Q2-S75-VMP	
325	Q2	17	05/09/08	S293	Q2-S293-VMP1	
326	Q2	17	05/09/08	S293	Q2-S293-VMP2	
327	Q2	17	05/09/08	S211	Q2-S211-VMP	
328	Q2	17	05/09/08	S270	Q2-S270-VMP	
329	Q2	18	05/14/08	S150	Q2-S150-AOA	Basement smells freshly painted; resident did not want all chemicals removed; some perfumes, mouthwash, isopropyl alcohol left in place
330	Q2	18	05/14/08	S150	Q2-S150-INA	
331	Q2	18	05/14/08	S150	Q2-S150-VMP	
332	Q2	19	05/21/08	S36	Q2-S36-VMP	
333	Q2	19	05/21/08	S234	Q2-S234-VMP	
334	Q2	19	05/21/08	S200	Q2-S200-VMP1	
335	Q2	19	05/21/08	S200	Q2-S200-VMP2	
336	Q2	19	05/21/08	S187	Q2-S187-VMP	
337	Q2	19	05/21/08	S187	Q2-S187-GMPR	
338	Q2	19	05/21/08	S258	Q2-S258-INA	
339	Q2	19	05/21/08	S258	Q2-S258-PVMP	
340	Q2	19	05/21/08	S258	Q2-S258-VMP	
341	Q2	19	05/21/08	S258	Q2-S258-GMPR	
342	Q2	19	05/21/08	S27	Q2-S27-VMP1	
343	Q2	19	05/21/08	S27	Q2-S27-VMP2	
344	Q2	19	05/21/08	S27	Q2-S27-INA	
345	Q2	19	05/21/08	S27	Q2-S27-GMPR	
346	Q2	19	05/21/08	S312	Q2-S312-VMP	
347	Q2	19	05/21/08	S312	Q2-S312-INA	
348	Q2	19	05/21/08	S312	Q2-S312-GMPR	

	Quarter	Week	SampDate	Home ID	Sample Name	Sampling Observation
651	Q3	33	08/27/08	S76	Q3-S76-GMPRR	Purged 1 liter
652	Q3	33	08/27/08	S237	Q3-S237-GMPRR	Purged 1 liter
653	Q3	33	08/27/08	S394	Q3-S394-VMP2	
654	Q3	33	08/27/08	S394	Q3-S394-VMP1	
655	Q3	33	08/27/08	S294	Q3-S294-VMP	
656	Q3	33	08/27/08	S122	Q3-S122-VMP	
657	Q3	33	08/27/08	S294	Q3-S294-GMPR2	Purged 1 liter
658	Q3	33	08/27/08	S294	Q3-S294-GMPR1	
659	Q3	33	08/27/08	S258	Q3-S258-GMPR	
660	Q3	33	08/27/08	S258	Q3-S258-VMP	
661	Q3	33	08/27/08	S258	Q3-S258-PVMP	
662	Q3	35	09/10/08	S52	Q3-S52-VMP-A	
663	Q3	35	09/10/08	S395	Q3-S395-GMP	
664	Q3	35	09/10/08	S389	Q3-S389-GMPRR-A	Purged 1 liter
665	Q3	35	09/10/08	S367	Q3-S367-GMPRR-A	Purged 1 liter
666	Q3	35	09/10/08	S395	Q3-S395-VMP	
667	Q3	35	09/10/08	S188	Q3-S188-VMP	Basement recently remodeled
668	Q3	35	09/10/08	S354	Q3-S354-GMPR	Purged 1 liter
669	Q3	35	09/10/08	S354	Q3-S354-VMP	
670	Q3	35	09/10/08	S341	Q3-S341-VMP	
671	Q3	35	09/10/08	S130	Q3-S130-GMPR2	
672	Q3	35	09/10/08	S130	Q3-S130-VMP1	
673	Q3	35	09/10/08	S130	Q3-S130-VMP2	
674	Q3	35	09/10/08	S390	Q3-S390-GMPR	
675	Q3	35	09/10/08	S76	Q3-S76-GMPRR-A	
676	Q3	35	09/10/08	S237	Q3-S237-GMPRR-A	
677	Q3	35	09/10/08	S390	Q3-S390-VMP	
678	Q3	35	09/12/08	S257	Q3-S257-VMP	
679	Q3	35	09/12/08	S143	Q3-S143-VMP2-A	
680	Q3	35	09/12/08	S143	Q3-S143-VMP1-A	
681	Q3	35	09/12/08	S220	Q3-S220-VMP	
682	Q3	35	09/12/08	S257	Q3-S257-GMPR	
683	Q3	35	09/12/08	S220	Q3-S220-GMP	
684	Q3	35	09/12/08	S373	Q3-S373-INA	
685	Q3	35	09/12/08	S373	Q3-S373-VMP-A	
686	Q3	35	09/12/08	S373	Q3-S373-GMPR-A	
687	Q3	35	09/12/08	S373	Q3-S373-AOA	
688	Q3	35	09/12/08	S4	Q3-S4-VMP	
689	Q3	35	09/12/08	S225	Q3-S225-VMP	
690	Q3	35	09/12/08	S200	Q3-S200-GMPRR-A	Purged 1 liter
691	Q3	35	09/12/08	S36	Q3-S36-GMPRR-A	Purged 1 liter
692	Q3	35	09/12/08	S358	Q3-S358-GMPRR-A	Partial grab sample, after water in tubing, and slow vacuum
693	Q3	35	09/12/08	S296	Q3-S296-VMP	
694	Q3	35	09/12/08	S270	Q3-S270-VMP	
695	Q3	35	09/12/08	S296	Q3-S296-GMP	Purged 1 liter
696	Q3	35	09/12/08	S140	Q3-S140-VMP	

TABLE 4 List of Vapor Samples By Home, Sample Type, and Quarter

Home ID	Q1		Q2			Q3		
	No. of Indoor Air	No. of Sub-Slab VMP	No. of Indoor Air	No. of Sub-Slab VMP	NO. of Outdoor GMP	No. of Indoor Air	No. of Sub-Slab VMP	NO. of Outdoor GMP
S4	1	1		1			1	
S7	1	1		1	1		1	1
S8	1	1		1			1	
S13	1	1		1	1		1	1
S17	1	1		1				
S21	1	2		2	2		2	2
S23	1	2		2			2	
S27*	1	2	1	2	1		2	1
S30*	1	2	1	2	2		2	2
S33	1	2		2	1		2	1
S36	1	1		1			1	2
S37	1	1		1	1		1	1
S41	1	1		1			1	
S45	1	1		1			1	
S48	1	1		1	1		1	1
S52			1	1			2	
S54	1	1		1	2		1	2
S56			1		1			1
S57	1	2		2			2	
S59	1	1		1			1	
S69	1	1		1			1	
S70	1				1			1
S72*	2	1		1			1	
S73*	1	2	1	2			2	
S75	1	1		1			1	
S76								2
S77	1				1			1
S79	1	2		2	1		2	1
S88	1	1		1			1	
S95	1	1		1			1	
S96	1	1		1	1		1	1
S107	1	1		1	1		1	1
S120	1	1		1	2		1	2
S121	1	1		1			1	
S122	1	1		1			1	
S130	1	2		2	1		2	1
S132	1	1		1			1	
S134	1	2		2	2		2	2
S138	1	1		1			1	
S140	1	1		1			1	
S143	1	2					4	
S144	1	1			1			1
S148	1	1						
S150			1	1			1	
S167	1				1			1
S176*	1	2	1	2	3		2	3
S183	1	2		2			2	
S187	1	1		1	1		1	1
S188			1	1			1	
S194*	1	1	1	1	1		1	1
S199	1	1		1	1		1	1
S200	1	2		2			2	2
S203	1	2						

TABLE 4 List of Vapor Samples By Home, Sample Type, and Quarter

Home ID	Q1		Q2			Q3		
	No. of Indoor Air	No. of Sub-Slab VMP	No. of Indoor Air	No. of Sub-Slab VMP	NO. of Outdoor GMP	No. of Indoor Air	No. of Sub-Slab VMP	NO. of Outdoor GMP
S211	1	1		1			1	
S213	1	1		1			1	
S214	1	1		1	2		1	2
S220	1	1		1	1		1	1
S225	1	1		1			1	
S229	1	1		1			1	
S234	1	1		1	1		1	1
S237	1	2		2			2	2
S238	1	1		1			1	
S239	1	1		1	1		1	1
S240	1	2		2	1		2	1
S241	1	2		2			2	
S245	1	1		1			1	
S250				2			2	
S254	1	1		1	1		1	1
S257	1	1		1	1		1	1
S258*	1	2	1	2	1		2	1
S267	1	1		1			1	
S269*	1	1	1	1	1		1	1
S270	1	1		1			1	
S276	1	1		1			1	
S278	1	3		3	2		3	2
S280	1	1		1			1	
S283			1	2			2	
S287	1	1		1	1			
S289	1	1		1	1		1	1
S293	1	2		2	1		2	1
S294	1	1		1	2		1	2
S296	1	1		1	1		1	1
S301	1				1			1
S305	1	1		1			1	
S309	1				1			1
S311	1	1		1	1		1	1
S312*	1	1	1	1	1		1	1
S313*	1	1	1	1	1		1	1
S315	1	1		1			1	
S322*	1	3	1	3			3	2
S325			1	1				
S326*	1	1	1	2	1		1	1
S335	1	1		1	1		1	1
S339	1	2		2	1		2	1
S341	1	1		1			1	
S342	1	1						
S344	1	1		1			1	
S347	1	2		2	2			
S354	1	1		1	1		1	1
S358	1							2
S360	1	1		1	1			
S362	1	1		1	1		1	1
S367	1	1						2
S373*	1	1		1	1	1	2	2
S380	1	1		1			1	
S381					1			1

TABLE 4 List of Vapor Samples By Home, Sample Type, and Quarter

Home ID	Q1		Q2			Q3		
	No. of Indoor Air	No. of Sub-Slab VMP	No. of Indoor Air	No. of Sub-Slab VMP	NO. of Outdoor GMP	No. of Indoor Air	No. of Sub-Slab VMP	NO. of Outdoor GMP
S384	1				1			1
S389	1							2
S390	1	1		1	1		1	1
S392	1	1						
S393	1				1			1
S394	1	2		2			2	
S395	1	1		1	1		1	1
S401	1	1		1			1	
S402	1	1		1			1	
S416	1	1		1	1		1	1
S419	1	1						
S426	1	1		1			1	

* Indoor air sampling repeated to achieve lower detection limits on target compounds

Q1-Q3 Number of Homes	Indoor Air:	115	SubSlab:	106	Outdoor GMP:	66	
Q1-Q3 Number of Samples		128		378		151	

TABLE 5 Analytes Detected in Vapor Samples

Analyte	Ambient Air			Indoor Air			Sub-Slab VMPs			Outdoor GMPs		
	Number of Detections (n=39)	Frequency of Detection	Max Detection * (ug/m ³)	Number of Detections (n=128)	Frequency of Detection	Max Detection * (ug/m ³)	Number of Detections (n=378)	Frequency of Detection	Max Detection * (ug/m ³)	Number of Detections (n=151)	Frequency of Detection	Max Detection * (ug/m ³)
Acetone	38	97.4%	60.69	122	95.3%	251.89	375	99.2%	125.71	150	99.3%	4,633.74
Acrylonitrile [#]							5	4.0%	0.69	1	0.7%	1.34
Benzene	38	97.4%	1.95	110	85.9%	8.36	252	66.7%	13.72	18	11.9%	24.88
Benzyl chloride							4	1.1%	5.51			
Bromodichloromethane				1	0.8%	0.20	18	4.8%	4.22			
Bromoform							3	0.8%	1.24			
1,3-Butadiene	2	5.1%	0.29	9	7.0%	5.81				4	2.6%	6.80
2-Butanone (MEK)	35	89.7%	3.92	101	78.9%	12.92	358	94.7%	25.48	134	88.7%	787.35
n-Butylbenzene [#]							21	16.8%	4.88	7	4.9%	156.43
sec-Butylbenzene [#]							1	0.8%	0.55	5	3.5%	28.98
Carbon disulfide	2	5.1%	0.68	5	3.9%	2.21	118	31.2%	18.15	143	94.7%	140.68
Carbon tetrachloride	10	25.6%	0.63	8	6.3%	0.94	113	29.9%	42.15			
Chlorobenzene				2	1.6%	25.56	11	2.9%	8.70	1	0.7%	8.66
Chloroethane							2	0.5%	3.40			
Chloroform	1	2.6%	0.19	31	24.2%	23.31	218	57.7%	301.76	69	45.7%	66.19
Chloromethane	39	100.0%	2.09	121	94.5%	4.90	85	22.5%	15.51	21	13.9%	4.96
Cyclohexane	1	2.6%	0.55	34	26.6%	7.47	88	23.3%	18.59	10	6.6%	5.71
Dibromochloromethane							1	0.3%	0.60			
1,2-Dibromoethane (EDB)							5	1.3%	4.46			
1,2-Dichlorobenzene							6	1.6%	3.49			
1,3-Dichlorobenzene				1	0.8%	4.93	24	6.3%	5.59			
1,4-Dichlorobenzene	4	10.3%	4.21	63	49.2%	3,012.15	213	56.3%	657.74	16	10.6%	46.41
Dichlorodifluoromethane (Freon 12) [#]	33	91.7%	3.41	103	99.0%	62.80	346	94.0%	39.11	65	43.0%	45.49
1,1-Dichloroethane							2	0.5%	0.57			
1,2-Dichloroethane	1	2.6%	0.12	6	4.7%	4.29	10	2.6%	2.79			
1,1-Dichloroethene							3	0.8%	0.79	3	2.0%	8.57
cis-1,2-Dichloroethene	1	2.6%	0.75	1	0.8%	0.63	14	3.7%	17.61	1	0.7%	32.51
trans-1,2-Dichloroethene				1	0.8%	0.08	7	1.9%	0.59			
1,2-Dichloropropane							1	0.3%	0.18	1	0.7%	2.87
cis-1,3-Dichloropropene							4	1.1%	1.50			
trans-1,3-Dichloropropene	1	2.6%	0.41				5	1.3%	3.50			
1,2-Dichlorotetrafluoroethane (Freon 114)				3	2.3%	33.55	7	1.9%	21.04	1	0.7%	29.08
1,4-Dioxane [#]							2	1.6%	13.68	3	2.1%	97.18
Ethanol	39	100.0%	23.76	127	99.2%	3,073.33	347	91.8%	1,046.44	139	92.1%	499.65
Ethyl acetate	4	10.3%	0.50	78	60.9%	51.53	190	50.3%	54.41	31	20.5%	64.86
Ethylbenzene	14	35.9%	4.81	40	31.3%	7.28	49	13.0%	25.36	25	16.6%	49.42
4-Ethyltoluene	2	5.1%	9.09	10	7.8%	9.73	19	5.0%	6.59	24	15.9%	318.57
n-Heptane	20	51.3%	1.07	72	56.3%	18.48	204	54.0%	78.68	51	33.8%	52.46
Hexachlorobutadiene				1	0.8%	5.22	2	0.5%	1.17			
Hexane	26	66.7%	2.33	96	75.0%	54.36	150	39.7%	11.04	36	23.8%	326.82
2-Hexanone (MBK)	5	12.8%	4.67	9	7.0%	2.21	224	59.3%	74.05	78	51.7%	190.97
Isopropyl alcohol	39	100.0%	53.50	125	97.7%	1,055.21	335	88.6%	104.88	135	89.4%	76.07
Isopropylbenzene [#]				1	14.3%	1.52	4	3.2%	1.43			
4-Isopropyltoluene [#]				3	42.9%	4.08	27	21.6%	5.85	8	5.6%	39.71
Methyl tert-butyl ether				1	0.8%	1.77	18	4.8%	4.51	17	11.3%	667.36
4-Methyl-2-pentanone (MIBK)	2	5.1%	2.17	6	4.7%	2.17	43	11.4%	6.23	2	1.3%	65.98
Methylene chloride	28	71.8%	4.03	59	46.1%	79.38	93	24.6%	1,229.23	4	2.6%	5.21
Naphthalene				27	21.1%	146.06	7	1.9%	72.25	9	6.0%	98.42
Propene	1	2.6%	2.62	6	4.7%	15.70	54	14.3%	33.47	123	81.5%	252.20
Styrene				19	14.8%	4.76	31	8.2%	5.83	3	2.0%	4.42
1,1,2,2-Tetrachloroethane [#]							2	1.6%	0.55			
Tetrachloroethene	11	28.2%	4.95	40	31.3%	42.31	358	94.7%	813.74	43	28.5%	929.02
Tetrahydrofuran	5	12.8%	1.09	16	12.5%	12.18	96	25.4%	28.07	14	9.3%	315.53
Toluene	39	100.0%	5.64	122	95.3%	164.73	352	93.1%	113.26	87	57.6%	173.69
Total Volatile Hydrocarbons C5-C12 (ppmV)	36	92.3%	0.11	121	94.5%	1.10	365	96.6%	0.52	151	100.0%	23.70
1,2,4-Trichlorobenzene	1	2.6%	0.82				13	3.4%	6.53	1	0.7%	11.28
1,1,1-Trichloroethane	1	2.6%	0.16	13	10.2%	8.18	141	37.3%	621.99	6	4.0%	24.33

TABLE 5 Analytes Detected in Vapor Samples

Analyte	Ambient Air			Indoor Air			Sub-Slab VMPs			Outdoor GMPs		
	Number of Detections (n=39)	Frequency of Detection	Max Detection * (ug/m ³)	Number of Detections (n=128)	Frequency of Detection	Max Detection * (ug/m ³)	Number of Detections (n=378)	Frequency of Detection	Max Detection * (ug/m ³)	Number of Detections (n=151)	Frequency of Detection	Max Detection * (ug/m ³)
1,1,2-Trichloroethane							1	0.3%	0.55	11	7.3%	22.26
Trichloroethene	3	7.7%	3.60	7	5.5%	7.26	99	26.2%	35.36	8	5.3%	15.91
Trichlorofluoromethane (Freon 11)	39	100.0%	2.64	94	73.4%	35.40	359	95.0%	24.11	38	25.2%	22.93
1,1,2-Trichlorotrifluoroethane (Freon 113)	13	33.3%	0.84	10	7.8%	0.92	165	43.7%	9.43	4	2.6%	23.45
1,2,4-Trimethylbenzene	19	48.7%	30.87	49	38.3%	22.12	120	31.7%	8.50	51	33.8%	1,066.81
1,3,5-Trimethylbenzene	2	5.1%	7.13	9	7.0%	6.98	23	6.1%	4.28	16	10.6%	155.84
m,p-Xylene	37	94.9%	20.03	100	78.1%	26.01	189	50.0%	197.69	46	30.5%	270.18
o-Xylene	13	33.3%	7.89	41	32.0%	11.79	54	14.3%	62.86	39	25.8%	189.89
Number of Compounds Detected	38			47			64			48		

* For results with an "E" flag from TO-15-SIMS Analysis, but not flagged in TO-15 (standard), the unflagged result is cited

The following compounds were added to the TO-15 analyte list during the course of the project and thus the total number of analyses are fewer than cited in the header
 1,1,1,2-Tetrachloroethane, 1,4-Dioxane, 4-Isopropyltoluene, Acrylonitrile, Dichlorodifluoromethane (Freon12), Isopropylbenzene, n-Butylbenzene, and sec-Butylbenzene

TABLE 6 Summary Statistics for Selected Petroleum-Related Analytes**Ambient Air Samples (AOA)**

	B	T	E	Xmp	Xo	Naphth	MTBE	124-TMB	135-TMB	CycloHex	Hexane	Propene	n-Heptane
Number of Valid Data	39	39	39	39	39	39	39	39	39	39	39	39	39
Number of Detected Data	38	39	14	37	13	0	0	14	2	1	26	1	20
Number of Non-Detect Data	1	0	25	2	26	39	39	25	37	38	13	38	19
Percent Detected	97.4%	100.0%	35.9%	94.9%	33.3%	0.0%	0.0%	35.9%	5.1%	2.6%	66.7%	2.6%	51.3%
Minimum Detected	0.32	0.60	0.30	0.39	0.48	NA	NA	0.44	1.82	NA	0.39	NA	0.29
Maximum Detected	1.95	5.64	4.81	20.03	7.89	NA	NA	30.87	7.13	NA	2.33	NA	1.07
Mean of Detected	1.00	2.15	0.93	1.79	1.34	NA	NA	2.61	4.47	NA	0.98	NA	0.59
SD of Detected	0.46	1.17	1.14	3.21	2.01	NA	NA	6.95	3.75	NA	0.44	NA	0.18
Minimum Non-Detect	0.40	NA	0.29	0.29	0.32	NA	NA	0.38	0.01	NA	0.06	NA	0.17
Maximum Non-Detect	0.40	NA	0.29	0.29	0.32	NA	NA	0.38	0.43	NA	0.33	NA	0.46
UCL	1.12	2.49	0.77	3.91	1.14	NA	NA	3.05	7.13	NA	0.91	NA	0.52

Indoor Air Samples (INA)

	B	T	E	Xmp	Xo	Naphth	MTBE	124-TMB	135-TMB	CycloHex	Hexane	Propene	n-Heptane
Number of Valid Data	115	115	115	115	115	115	115	115	115	115	115	115	115
Number of Detected Data	107	114	39	97	41	27	1	48	9	34	92	2	71
Number of Non-Detect Data	8	1	76	18	74	88	114	67	106	81	23	113	44
Percent Detected	93.0%	99.1%	33.9%	84.3%	35.7%	23.5%	0.9%	41.7%	7.8%	29.6%	80.0%	1.7%	61.7%
Minimum Detected	0.48	1.43	0.39	0.69	0.39	5.39	NA	0.49	0.49	0.28	0.60	2.12	0.49
Maximum Detected	8.36	164.70	7.28	26.01	11.79	146.10	NA	22.12	6.98	7.47	54.36	5.15	18.48
Mean of Detected	1.80	9.34	1.80	3.46	1.85	25.69	NA	3.14	2.56	1.62	3.69	3.63	2.35
SD of Detected	1.33	18.44	1.61	4.18	2.14	26.31	NA	4.23	2.25	1.56	6.42	2.14	2.86
Minimum Non-Detect	0.40	3.67	0.29	1.07	0.32	5.24	NA	0.38	0.01	0.03	0.06	0.10	0.17
Maximum Non-Detect	3.17	3.67	4.90	8.54	4.02	41.88	NA	5.65	6.93	3.11	2.60	4.17	3.64
UCL	1.95	12.69	1.10	3.70	1.17	12.58	NA	2.15	0.79	0.87	4.07	2.21	2.03

Sub-Slab Vapor Samples (VMP)

	B	T	E	Xmp	Xo	Naphth	MTBE	124-TMB	135-TMB	CycloHex	Hexane	Propene	n-Heptane
Number of Valid Data	378	378	378	378	378	378	378	378	378	378	378	378	378
Number of Detected Data	252	352	49	189	54	7	18	120	23	88	150	54	204
Number of Non-Detect Data	126	26	329	189	324	371	360	258	355	290	228	324	174
Percent Detected	66.7%	93.1%	13.0%	50.0%	14.3%	1.9%	4.8%	31.7%	6.1%	23.3%	39.7%	14.3%	54.0%
Minimum Detected	0.06	0.23	0.30	0.30	0.35	6.70	0.25	0.39	0.44	0.10	0.07	0.10	0.21
Maximum Detected	13.72	113.30	25.36	197.70	62.86	72.25	4.51	8.51	4.28	18.59	11.04	33.47	78.68
Mean of Detected	0.85	3.77	1.68	2.61	2.51	20.86	1.40	1.22	1.18	1.36	1.08	1.84	1.69
SD of Detected	1.20	8.80	3.84	14.99	8.80	23.23	1.27	1.41	1.05	2.56	1.45	5.32	6.03
Minimum Non-Detect	0.00	0.01	0.01	0.02	0.01	5.24	0.01	0.01	0.01	0.03	0.01	0.00	0.02
Maximum Non-Detect	1.98	2.30	3.06	5.33	2.52	26.18	1.95	3.54	4.33	1.95	1.63	1.04	2.27
UCL	0.70	5.45	0.61	2.48	1.01	11.28	0.34	0.74	0.54	0.53	0.58	0.61	1.44

Outdoor Subsurface Vapor Samples (GMP)

	B	T	E	Xmp	Xo	Naphth	MTBE	124-TMB	135-TMB	CycloHex	Hexane	Propene	n-Heptane
Number of Valid Data	151	151	151	151	151	151	151	151	151	151	151	151	151
Number of Detected Data	18	87	25	46	39	9	17	51	16	10	36	123	51
Number of Non-Detect Data	133	64	126	105	112	142	134	100	135	141	115	28	100
Percent Detected	11.9%	57.6%	16.6%	30.5%	25.8%	6.0%	11.3%	33.8%	10.6%	6.6%	23.8%	81.5%	33.8%
Minimum Detected	0.26	0.72	0.91	1.08	1.47	5.60	0.90	0.64	2.66	1.17	0.88	0.81	0.90
Maximum Detected	24.88	173.70	49.42	270.20	189.90	98.42	667.40	1067.00	155.80	5.71	326.80	252.20	52.46
Mean of Detected	4.78	16.10	10.87	28.51	19.35	46.48	131.10	111.60	40.28	2.84	18.38	19.10	6.62
SD of Detected	7.25	29.59	14.34	55.39	35.88	30.32	217.60	242.50	48.10	1.91	56.94	31.59	9.14
Minimum Non-Detect	0.40	0.46	0.29	0.29	0.32	5.24	0.15	0.71	0.43	0.08	0.06	0.10	0.17
Maximum Non-Detect	3.96	3.67	6.11	10.67	5.03	52.35	3.90	7.08	8.65	3.89	3.25	4.16	4.55
UCL	1.58	18.04	4.30	15.63	9.55	30.84	26.94	114.70	9.30	1.50	10.48	26.17	3.81

TABLE 7 Summary Statistics for Selected Chlorinated Analytes
Ambient Air Samples (AOA)

	PCE	TCE	111-TCA	CF	CM	14-DCB
Number of Valid Data	39	39	39	39	39	39
Number of Detected Data	11	3	1	1	39	4
Number of Non-Detect Data	28	36	38	38	0	35
Percent Detected	28.2%	7.7%	2.6%	2.6%	100.0%	10.3%
Minimum Detected	0.61	1.18	NA	NA	0.89	0.72
Maximum Detected	4.95	3.60	NA	NA	2.09	4.21
Mean of Detected	1.35	1.99	NA	NA	1.32	1.65
SD of Detected	1.35	1.40	NA	NA	0.27	1.70
Minimum Non-Detect	0.29	0.02	NA	NA	NA	0.49
Maximum Non-Detect	0.97	0.82	NA	NA	NA	0.86
UCL	1.08	1.37	NA	NA	1.39	1.19

Indoor Air Samples (INA)

	PCE	TCE	111-TCA	CF	CM	14-DCB
Number of Valid Data	115	115	115	115	115	115
Number of Detected Data	40	7	13	31	112	61
Number of Non-Detect Data	75	108	102	84	3	54
Percent Detected	34.8%	6.1%	11.3%	27.0%	97.4%	53.0%
Minimum Detected	0.41	0.16	0.16	0.49	0.76	0.66
Maximum Detected	42.31	7.26	8.18	23.31	4.90	3012.00
Mean of Detected	4.53	2.08	2.30	3.33	1.60	148.00
SD of Detected	7.21	2.47	2.13	4.37	0.69	476.40
Minimum Non-Detect	0.29	0.02	0.01	0.01	0.26	0.49
Maximum Non-Detect	7.73	6.56	5.67	8.62	2.05	6.85
UCL	2.70	0.40	0.56	1.79	1.70	285.40

Sub-Slab Vapor Samples (VMP)

	PCE	TCE	111-TCA	CF	CM	14-DCB
Number of Valid Data	378	378	378	378	378	378
Number of Detected Data	358	99	141	218	85	213
Number of Non-Detect Data	20	279	237	160	293	165
Percent Detected	94.7%	26.2%	37.3%	57.7%	22.5%	56.3%
Minimum Detected	0.34	0.16	0.16	0.15	0.17	0.54
Maximum Detected	813.70	35.36	622.00	301.80	15.51	657.70
Mean of Detected	34.69	1.92	13.96	9.11	0.68	9.37
SD of Detected	108.90	4.98	74.35	34.76	1.70	51.32
Minimum Non-Detect	0.29	0.02	0.01	0.01	0.01	0.01
Maximum Non-Detect	4.85	4.11	3.55	5.35	1.28	4.30
UCL	67.02	0.86	15.61	11.34	0.37	14.22

Outdoor Subsurface Vapor Samples (GMP)

	PCE	TCE	111-TCA	CF	CM	14-DCB
Number of Valid Data	151	151	151	151	151	151
Number of Detected Data	43	8	6	69	21	16
Number of Non-Detect Data	108	143	145	82	130	135
Percent Detected	28.5%	5.3%	4.0%	45.7%	13.9%	10.6%
Minimum Detected	1.70	3.44	3.17	1.22	0.60	1.14
Maximum Detected	929.00	15.91	24.33	66.19	4.96	46.41
Mean of Detected	59.95	9.87	14.04	14.50	1.98	15.30
SD of Detected	190.00	4.57	8.63	15.17	1.38	13.64
Minimum Non-Detect	0.97	0.16	0.14	1.08	0.15	0.86
Maximum Non-Detect	9.70	8.22	7.09	10.76	2.56	8.60
UCL	34.26	6.90	16.85	9.21	0.90	3.90

TABLE 8 Soil and Groundwater Samples Collected During Second Quarter (Q2) Outdoor VMP Installation

Home ID	Sample Name	Depth (ft)	Sample Type	Date Sampled
S5	S5 SB (8')	8	SOIL	3/31/2008
S7	S7 SB (6')	6	SOIL	4/1/2008
S13	S13 - SB (18')	18	SOIL	4/15/2008
S21	S21 SB (12.2')	12.2	SOIL	4/2/2008
S27	S27 SB (19')	19	SOIL	4/1/2008
S30	S30 - SB (11')	11	SOIL	4/15/2008
S36	S36 SB (16')	16	SOIL	4/1/2008
S37	S37 SB (10')	10	SOIL	3/31/2008
S48	S48-SB(12')	12	SOIL	5/16/2008
S54	S54 - SB (16')	16	SOIL	4/11/2008
S56	S56 SB (2')	2	SOIL	3/31/2008
S70	S70 - SB (5')	5	SOIL	4/10/2008
S76	S76-SB (24')	24	SOIL	4/3/2008
S77	S77-SB(2')	2	SOIL	5/14/2008
S79	S79 SB (16')	16	SOIL	4/2/2008
S96	S96-SB(8')	8	SOIL	5/13/2008
S107	S107 - SB (13')	13	SOIL	4/11/2008
S120	S120 - SB (16')	16	SOIL	4/17/2008
S130	S130 - SB (16')	16	SOIL	4/9/2008
S134	S134 - SB (18')	18	SOIL	4/9/2008
S144	S144-SB(1')	1	SOIL	5/13/2008
S167	S167 SB (5')	5	SOIL	3/31/2008
S176	S176 - SB (35')	35	SOIL	4/16/2008
S187	S187 - SB (2')	2	SOIL	4/10/2008
S194	S194 SB (20')	20	SOIL	4/2/2008
S199	S199 SB (12')	12	SOIL	4/1/2008
S200	S200 - SB (16')	16	SOIL	4/15/2008
S214	S214 SB (8')	8	SOIL	3/31/2008
S220	S220 - SB (17')	17	SOIL	4/17/2008
S233	S233 - SB (16')	16	SOIL	4/15/2008
S234	S234 SB (5')	5	SOIL	4/1/2008
S237	S237-SB (20')	20	SOIL	4/3/2008
S239	S239 - SB (17')	17	SOIL	4/7/2008
S240	S240 - SB (8')	8	SOIL	4/15/2008
S254	S254 SB (18.5')	18.5	SOIL	4/2/2008
S257	S257-SB(12')	12	SOIL	5/15/2008
S258	S258 SB (15.8')	15.8	SOIL	4/2/2008
S269	S269 SB (19')	19	SOIL	4/2/2008
S278	S278-SB (22')	22	SOIL	4/3/2008
S287	S287-SB(1')	1	SOIL	5/14/2008
S289	S289 - SB (19')	19	SOIL	4/16/2008
S294	S294-SB (28')	28	SOIL	4/3/2008

Home ID	Sample Name	Depth (ft)	Sample Type	Date Sampled
S296	S296-SB(5')	5	SOIL	5/16/2008
S301	S301 SB (4')	4	SOIL	3/31/2008
S309	S309 SB (10')	10	SOIL	3/31/2008
S311	S311 SB (5')	5	SOIL	4/1/2008
S312	S312 - SB (15')	15	SOIL	4/11/2008
S313	S313 - SB (15')	15	SOIL	4/9/2008
S322	S322 SB (16')	16	SOIL	4/2/2008
S326	S326 SB (16')	16	SOIL	4/1/2008
S335	S335 - SB (20')	20	SOIL	4/16/2008
S339	S339 - SB (17')	17	SOIL	4/7/2008
S347	S347 - SB (18')	18	SOIL	4/9/2008
S354	S354 - SB (17')	17	SOIL	4/15/2008
S358	S358-SB(2')	2	SOIL	5/13/2008
S360	S360-SB (19')	19	SOIL	4/3/2008
S362	S362 - SB (16')	16	SOIL	4/17/2008
S367	S367 - SB (5')	5	SOIL	4/10/2008
S373	S373 - SB (17.5')	17.5	SOIL	4/7/2008
S381	S381 - SB (10')	10	SOIL	4/17/2008
S384	S384 SB (5')	5	SOIL	3/31/2008
S389	S389 - SB (10')	10	SOIL	4/17/2008
S390	S390 - SB (5.5')	5.5	SOIL	4/16/2008
S392	S392 SB (6.5')	6.5	SOIL	4/1/2008
S393	S393 - SB (5')	5	SOIL	4/10/2008
S395	S395-SB(1')	1	SOIL	5/13/2008
S403	S403 - SB (20')	20	SOIL	4/16/2008
S416	S416 - SB (21')	21	SOIL	4/16/2008
S419	S419 SB (15.5')	15.5	SOIL	4/2/2008
S7	S7 GW	7.7	WATER	4/1/2008
S56	S56 GW	4	WATER	3/31/2008
S107	S107 - GW	13.5	WATER	4/11/2008
S167	S167 GW	5.95	WATER	3/31/2008
S199	S199 GW	12.4	WATER	4/1/2008
S214	S214 GW	7.7	WATER	3/31/2008
S234	S234 GW	6.1	WATER	4/1/2008
S301	S301 GW	4.6	WATER	3/31/2008
S309	S309 GW	10.9	WATER	3/30/2008
S311	S311 GW	6.1	WATER	4/1/2008
S381	S381 - GW	8	WATER	4/17/2008
S384	S384 GW	6.95	WATER	3/31/2008
S389	S389 - GW	11	WATER	4/17/2008
S392	S392 GW	7.2	WATER	4/1/2008

TABLE 9 Compounds Detected in Soil and Groundwater Samples
Soil Samples

Analyte	Number of Samples	Number of Detections	Maximum Detection (ug/kg)
Acetone	69	3	17
m,p-Xylenes	69	1	4000
Methyl-t-butyl ether	69	1	3
Naphthalene	69	1	3000
o-Xylene	69	1	2100

Groundwater Samples

Analyte	Number of Samples	Number of Detections	Maximum Detection (ug/l)
Acetone	14	2	14
Chloroform	14	1	2
Methyl-t-butyl ether	14	8	83
Tetrachloroethene	14	1	7

TABLE 10 Duplicate Vapor Samples Collected

	Quarter	Week	Home ID	Sample Name	Sample Date
1	Q1	2	S220	S220-VMP-D	1/24/2008
2	Q1	3	S309	S309-INA-D	1/30/2008
3	Q1	3	S373	S373-VMP-D	1/30/2008
4	Q1	3	S326	S326-INA-D	2/1/2008
5	Q1	3	S367	S367-VMP-D	2/1/2008
6	Q1	4	S7	S7-AOA-D	2/6/2008
7	Q1	4	S199	S199-VMP-D	2/6/2008
8	Q1	4	S301	S301-INA-D	2/6/2008
9	Q1	5	S48	S48-VMP-D	2/13/2008
10	Q1	5	S294	S294-AOA-D	2/13/2008
11	Q1	5	S144	S144-VMP-D	2/15/2008
12	Q1	5	S234	S234-INA-D	2/15/2008
13	Q1	6	S278	S278-INA-D	2/21/2008
14	Q1	6	S426	S426-VMP-D	2/21/2008
15	Q1	7	S69	S69-VMP-D	2/27/2008
16	Q1	7	S107	S107-INA-D	2/27/2008
17	Q1	7	S70	S70-INA-D	2/29/2008
18	Q1	7	S138	S138-VMP-D	2/29/2008
19	Q1	8	S280	S280-VMP-D	3/5/2008
20	Q1	8	S140	S140-INA-D	3/7/2008
21	Q1	8	S203	S203-VMP2-D	3/7/2008
22	Q1	9	S187	S187-VMP-D	3/12/2008
23	Q1	9	S287	S287-INA-D	3/12/2008
24	Q1	9	S276	S276-AOA D	3/14/2008
25	Q1	9	S358	S358-INA-D	3/14/2008
26	Q1	10	S257	S257-VMP-D	3/19/2008
27	Q1	12	S77	S77-INA-D	4/4/2008
28	Q2	14	S315	S315-VMP-D	4/16/2008
29	Q2	14	S134	S134-GMP2-D	4/18/2008
30	Q2	14	S426	S426-VMP-D	4/18/2008
31	Q2	15	588	S88-VMP-D	4/23/2008
32	Q2	15	S48	S48-VMP-D	4/25/2008
33	Q2	16	S57	S57-VMP2-D	4/30/2008
34	Q2	17	S402	S402-VMP-D	5/7/2008
35	Q2	19	S187	S187-VMP-D	5/21/2008
36	Q2	19	S199	S199-GMPR-D	5/23/2008

	Quarter	Week	Home ID	Sample Name	Sample Date
37	Q2	20	S354	S354-VMP-D	5/28/2008
38	Q2	21	S269	S269-INA-D	6/4/2008
39	Q2	21	S289	S289-GMPR-D	6/4/2008
40	Q2	21	S301	S301-GMPR-D	6/4/2008
41	Q2	21	S322	S322-VMP2-D	6/5/2008
42	Q2	22	S52	S52-INA-D	6/11/2008
43	Q2	22	S313	S313-AOA-D	6/11/2008
44	Q2	22	S48	S48-GMP-D	6/12/2008
45	Q2	22	S326	S326-VMP-D	6/12/2008
46	Q2	22	S121	S121-VMP-D	6/13/2008
47	Q2	22	S239	S239-GMPR-D	6/13/2008
48	Q2	23	S347	S347-VMP2-D	6/20/2008
49	Q2	23	S390	S390-GMPR-D	6/20/2008
50	Q2	24	S130	S130-VMP2-D	6/25/2008
51	Q2	24	S77	S77-GMP-D	6/27/2008
52	Q3	27	S56	S56-GMPR-D	7/16/2008
53	Q3	27	S187	S187-VMP-D	7/18/2008
54	Q3	28	S213	S213-VMP-D	7/23/2008
55	Q3	28	S234	S234-GMPR-D	7/23/2008
56	Q3	28	S33	S33-VMP-D	7/25/2008
57	Q3	29	S79	S79-VMP1-D	7/30/2008
58	Q3	29	S134	S134-VMP2-D	7/30/2008
59	Q3	29	S229	S229-VMP-D	7/30/2008
60	Q3	29	S384	S384-GMPR-D	8/1/2008
61	Q3	30	S326	S326-VMP-D	8/6/2008
62	Q3	30	S322	S322-VMP2-D	8/8/2008
63	Q3	31	S37	S37-VMP-D	8/13/2008
64	Q3	31	S293	S293-VMP2-D	8/13/2008
65	Q3	32	S335	S335-GMPR-D	8/20/2008
66	Q3	32	S21	S21-VMPI-D	8/22/2008
67	Q3	32	S132	S132-VMP-D	8/22/2008
68	Q3	33	S339	S339-VMPI-D	8/27/2008
69	Q3	33	S416	S416-GMPR-D	8/27/2008
70	Q3	35	S237	S237-GMPRR-D	9/10/2008
71	Q3	35	S354	S354-GMPR-D	9/10/2008
72	Q3	35	S270	S270-VMP-D	9/12/2008

TABLE 11 Selected Information from Home Surveys

Home ID	Date	Pre-Existing VMPs?			Basement Sump?		Painting/Remodeling in Past 6 months?		Roof Repairs in Past Year?		Attached Garage?			Smokers In House?		Dry Cleaning in House?		Residents Work with Solvents?		
		Yes/No	Number	Comment	Yes/No	Water in Sump?	Comment	Yes/No	Comment	Yes/No	Comment	Yes/No	Comment	Car/Gas Cans in Garage?	Yes/No	Comment	Yes/No	Comment	Yes/No	Comment
S7	Feb-08						Yes	Bathroom, august 2007			Yes	in shed- 1 gallon gas can	Yes							
S17	Mar-08						Yes	Kitchen - finished 3 weeks ago	Yes	Repaired this year										
S21	Feb-08						Yes	2nd floor bathroom						Yes						
S23	Jan-08								Yes	Early December 2007				Yes	Husband smokes, wife quit					
S27	Jan-08						Yes	painting patch in second floor												
S33	Mar-08	Yes	1	utility area towards back, non-neighbor side in front of freezer - has 2" brass cap										Yes	yes- one					
S36	Feb-08															Yes	last Saturday, 2 shirt and pair of pants, keep in the car			
S37	Feb-08								Yes	repaired 1 yr ago										
S41	Feb-08						Yes	yes, last summer 6 months ago whole interior of house painted												
S45	Apr-08				Yes	no water														
S52	Jun-08								Yes	Yes - recently repaired late May										
S54	Feb-08													Yes	one - occasionally					
S56	May-08						Yes	kitchen remodeled, whole house painted finished in April (Feb. to Apr.)												
S57	Feb-08						Yes	kitchen floor/whole kitchen												
S73	Jan-08	Yes	1	sealed and abandoned with concrete																
S77	Apr-08													Yes	yes, owner is a smoker	Yes	not sure, probably 7 days ago			
S88	Feb-08								Yes	Nov. 11 2007 - whole roof										
S96	Mar-08				Yes		Yes	hallway 6 months ago												
S107	Feb-08								Yes	last summer-replaced										
S120	Mar-08													Yes	yes, occasional					
S121	Mar-08				Yes	No water	Yes	Bedroom								Yes	Yes - today - putting in car			
S130	Feb-08													Yes	one	Yes	2 weeks ago			
S132	Apr-08									Yes	no shed, gas lawnmower in basement									
S134	Feb-08																	Yes	DC public works, waste managements	
S138	Feb-08				Yes	didn't check due to period w/out flood	Yes	in process of redoing basement floor tile									Yes	jacket - 2 weeks ago		
S140	Mar-08						Yes	basement started about 6 months ago									Yes	one coat last week- wearing	Yes	furniture repair and refinishing
S143	Mar-08						Yes	1st floor bathroom - Feb 2008: some fixing									Yes	2 outfits - 2 Saturdays ago		
S148	Jan-08																Yes	two weeks ago		
S150	May-08						Yes	Painting and drywall work done in rear basement--exercise room		Yes	gas cans, lawnmower, paint supplies all stored in garage	Yes								
S176	Jan-08								Yes	new roof a week ago										
S188	Apr-08															Yes	2 weeks ago			
S194	Jan-08								Yes	yes- 3 months ago in October										
S200	Feb-08				Yes	no water; never runs			Yes	Front porch roof last summer, main roof 3 years ago										
S203	Mar-08								Yes	yes, 2 weeks ago- replaced				Yes	grandson smokes					
S211	Mar-08						Yes	put in carpet	Yes	1 yr ago - replaced										
S214	Feb-08						Yes	2 months ago- steps				Yes	no gas cans							
S220	Jan-08															Yes	recently, will be removed			
S225	Feb-08				Yes	no water														
S234	Feb-08						Yes	yes, about 4 months ago- living room and 2nd floor hallway						Yes	usually smokes outside					
S237	Feb-08								Yes	Done last year (repaired)										
S238	Mar-08								Yes	Yes, repaired October 2007				Yes	Not anymore as of 2 weeks ago					
S239	Feb-08						Yes	Back attached sun room, rear of kitchen	Yes	2005 and December 2007	Yes	shed, gas cans in shed		Yes	Daughter smokes					
S240	Feb-08						Yes	Oct-Nov 07												
S241	Feb-08																Yes	about 2 weeks ago		
S245	Feb-08													Yes	one downstairs & one smoer - smokes outside					
S250	Mar-08						Yes	yes, yesterday	Yes	8 months ago-repaired										
S257	Mar-08						Yes	repaired two weeks ago (loose flap)	Yes							Yes	over two weeks ago			
S258	Jan-08	Yes	1	One VMP installed previously by the EPA in basement.																
S267	Mar-08						Yes	yes, closet hole repair 6 months ago												
S270	Mar-08						Yes	yes, basement is being remodeled												

TABLE 11 Selected Information from Home Surveys

Home ID	Date	Pre-Existing VMPs?			Basement Sump?		Painting/Remodeling in Past 6 months?		Roof Repairs in Past Year?		Attached Garage?		Smokers In House?		Dry Cleaning in House?		Residents Work with Solvents?	
		Yes/No	Number	Comment	Yes/No	Water in Sump?	Comment	Yes/No	Comment	Yes/No	Comment	Yes/No	Comment	Car/Gas Cans in Garage?	Yes/No	Comment	Yes/No	Comment
S278	Feb-08	Yes	4	2 in front room under carpet and 2 in back											Yes	1 coat - will put in car		
S287	Mar-08						Yes	yes, in progress- last painting was bathroom 2 weeks ago, basement painted and tiled 1 to 1.5 months ago					Yes	yes	Yes	week before last		
S289	Mar-08								Yes	whole new roof 2 weeks ago								
S294	Feb-08														Yes	maybe, will talk to son about removing it from house		
S296	Mar-08						Yes	approx. 6 months upstairs room										
S301	Feb-08				Yes	Yes							Yes	son smokes sometimes				
S305	Feb-08						Yes	yes, 2 months ago										
S312	Jan-08										Yes	car, gas, lawn mower	Yes					
S322	Feb-08	Yes		1 PVMP has been installed w/ sampling port. hose is kinked thus depth was impossible to ascertain. >14"					Yes	recoated 1 yr ago	Yes	no shed. no gas cans.						
S335	Mar-08				Yes			no water										
S339	Feb-08						Yes	Porch-July	Yes	8 months ago repaired								
S341	Mar-08												Yes	one				
S342	Mar-08														Yes	yes -- in car during sampling		
S344	Mar-08														Yes	2 weeks ago		
S347	Feb-08						Yes	painted in December 2007- kitchen										
S358	Mar-08				Yes	Yes		sump has pumping problems										
S360	Feb-08						Yes	kitchen - last April; bedroom - last month partition										
S362	Feb-08														Yes	one outfit cleaned more than a week ago, 2/14/08		
S367	Jan-08				Yes	Yes		below intake - stagnant completely settles										
S373	Jan-08				Yes			no water in sump										
S380	Feb-08								Yes	Yes- last year roof recoating			Yes	yes				
S384	Feb-08														Yes	decombes picked up		
S389	Mar-08								Yes	replaced one year ago								
S390	Mar-08												Yes	one- smokes outside	Yes	yes- will put out		
S392	Feb-08								Yes	>= 1 year			Yes		Yes			
S393	Feb-08				Yes	Yes							Yes					
S394	Mar-08						Yes	painting back bedroom - 3 weeks ago										
S401	Mar-08						Yes	Dec-07					Yes	3 people in basement				
S402	Mar-08						Yes	yes, basement finished October 2007							Yes	more than 1 week		
S416	Mar-08														Yes	Yes, but three weeks ago		
S419	Feb-08														Yes	one coat, wearing	Yes	yes, just a hobby- paints cars
S426	Feb-08												Yes	one - wife				